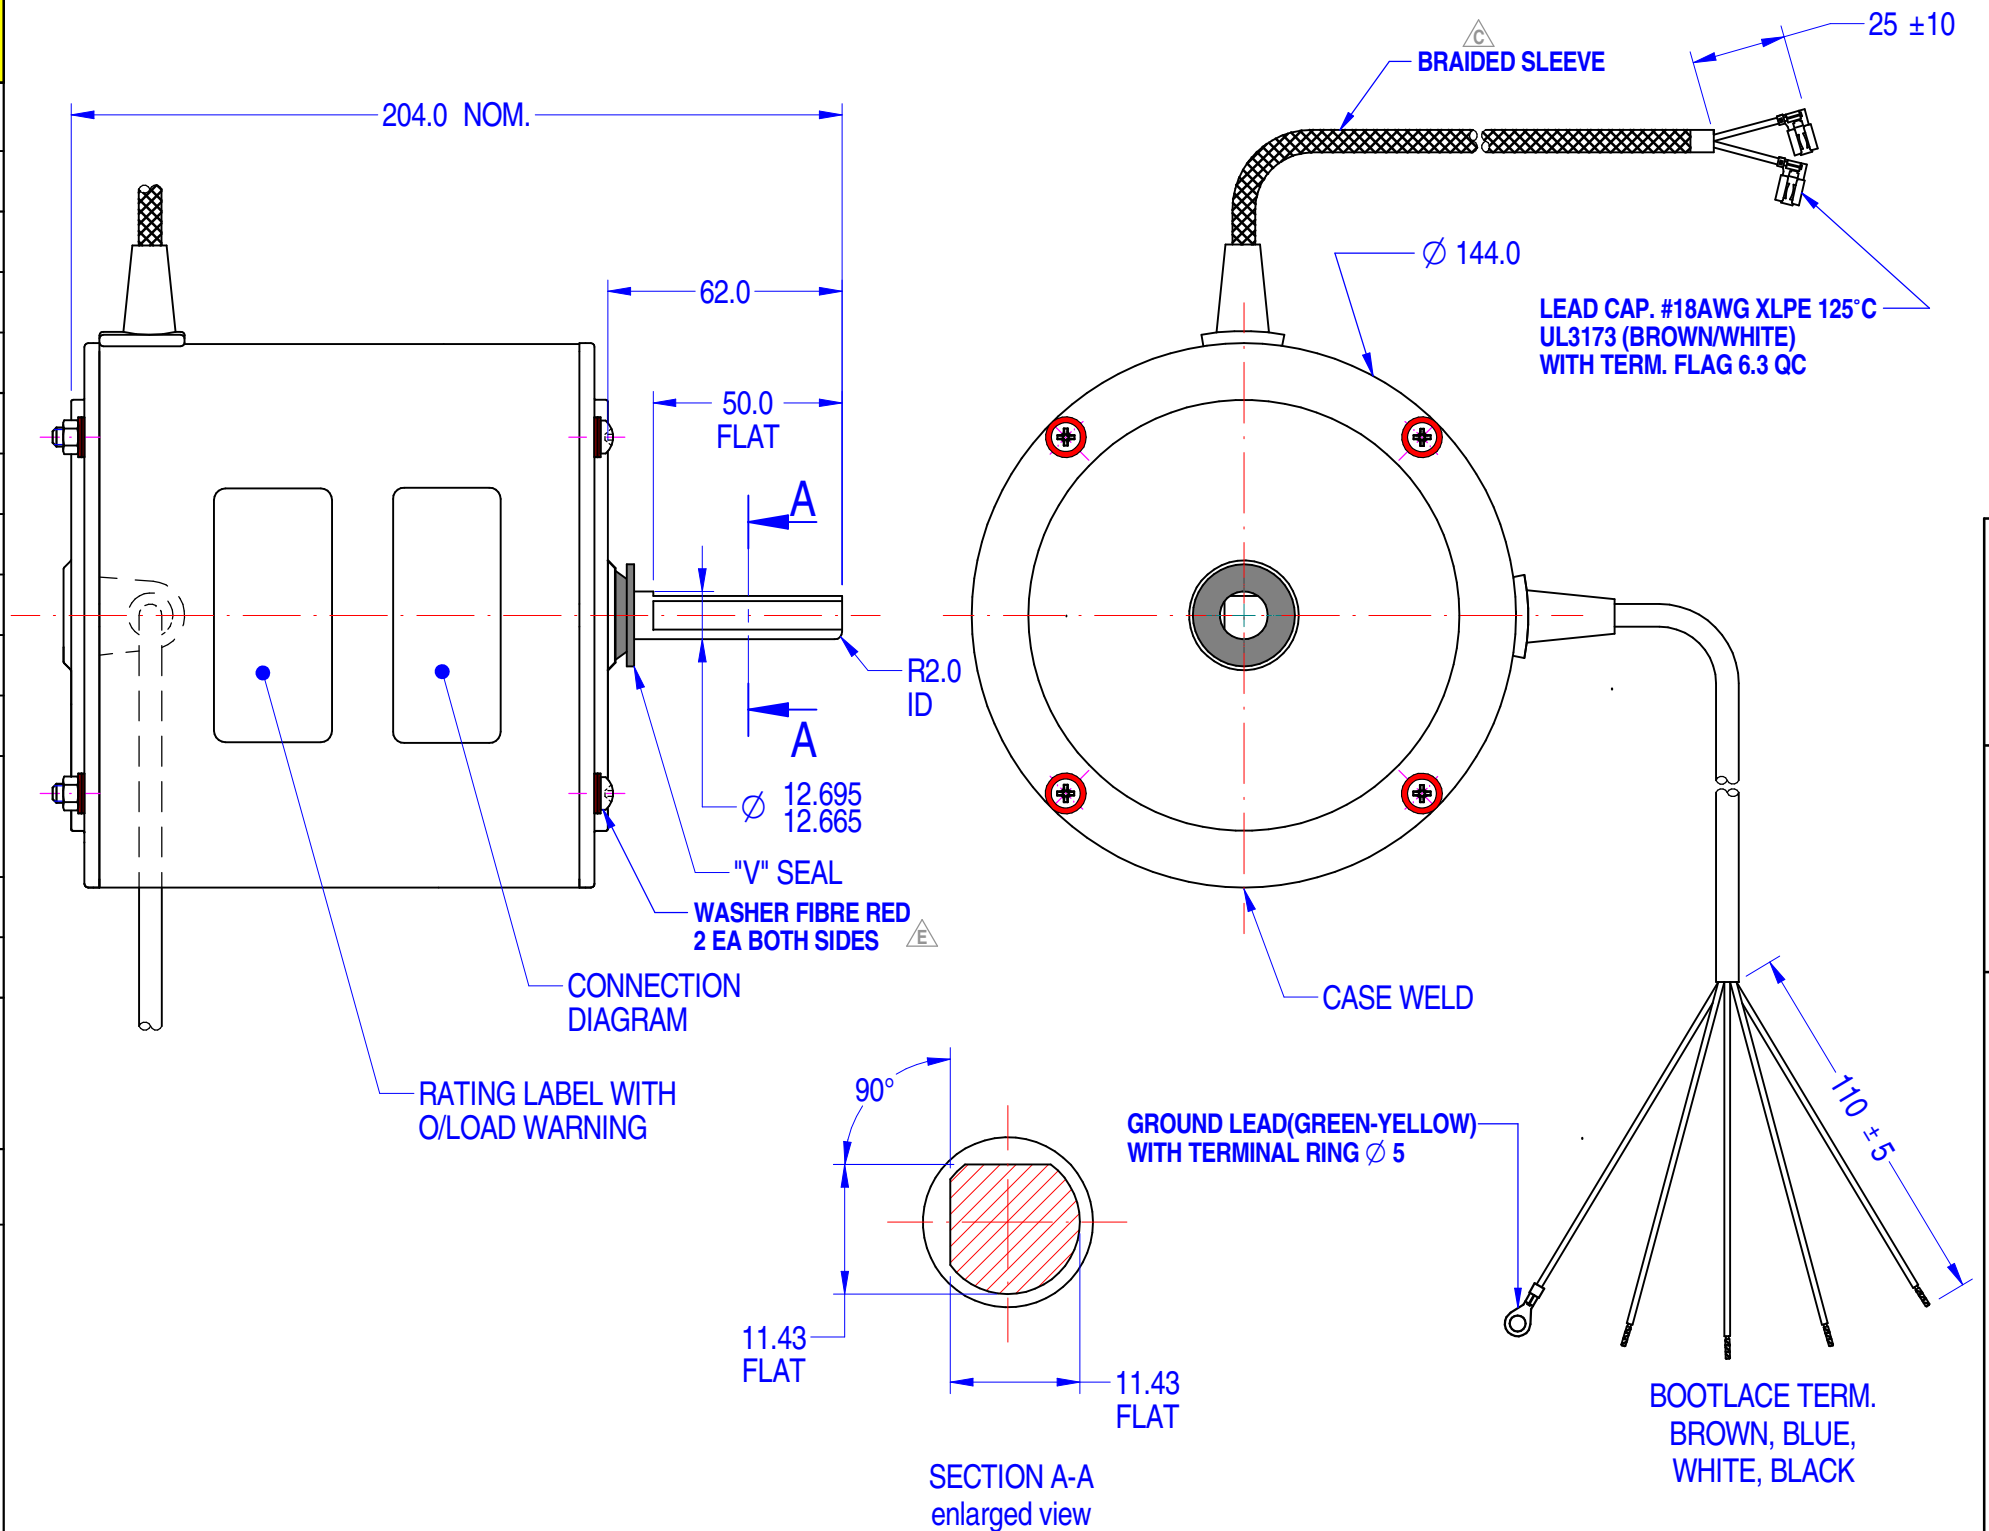


**FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)**

THIRD ANGLE PROJECTION.

Q.R. No.		-		CUSTOMER NO.		-		
CUSTOMER		KENT AIR ENG						
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	AOM
	RPM.	910			2.7			AMPS
	NOM. OUTPUT	300 WATTS						
ROTATION		CLOCKWISE DRIVE END						
CAPACITOR		START	-----	µF/V	RUN	6/440		µF/V
ENCLOSURE		TOTALLY ENCLOSED						
MOTOR TYPE		CSR			INSULATION CLASS		B130	
THERMAL PROTECTION		AUTO RESET OVERLOAD						
APPLICATION		FAN MOTOR						
BEARING D.E.		6202 DDU C3 EA2			LUBRICATION		LONG LIFE, WIDE RANGE	
BEARING N.D.E.		6202 DDU C3 EA2						
SUPPLY LEAD		FLEX 2000 ± 30 BOTH LEADS GREY						
EARTH PROVISION		VIA SUPPLIED LEAD						
BASIC BUILD SPECIFICATION		305-647-02			PAINT/ COLOUR		PC GREY CASE PLAIN E/SHIELDS	
PERFORMANCE SPECIFICATION		SP85099-01						
CONNECTION DIAGRAM		393-179			RATING LABEL		SSTDAUTO.FMT	

**FASCO**

		ddmmyyxxxx
MODEL	8061S118-02S	

VOLTS	<b>240</b>	R.P.M.	<b>910</b>	CLASS	<b>B130</b>	Hz	<b>50</b>
WATTS	<b>300</b>	TYPE	<b>CSR</b>	$\mu$ F/V S	<b>NIL</b>	Ph	<b>1</b>
AMPS	<b>2.7</b>	DUTY	<b>AOM</b>	$\mu$ F/V R	<b>6/440</b>	PROT.	<b>AUTO</b>

## WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET  
OVERLOAD AND MAY RESTART WITHOUT WARNING

- 1)\_ "V" SEAL TO BE FITTED ON SHAFT
- 2)\_ CAPACITOR 345-013-03 TO BE SUPPLIED LOOSE
- 3)\_ RED FIBRE WASHERS TO BE FITTED - BOTH ENDS
- 4)\_ MOTOR TO BE PACKED IN SINGLE CARTON

DECIMALS		ANGULAR
.X	± 1.0	± 30'
.XX	± 0.1	

MOTOR WEIGHT			8.2	kg
DRAWN	muntana	12/07/2006		
CHECKED	Pipat	29/10/2018		
RELEASED	Kanapote	01/11/2018		
SCALE	N.T.S.			



29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,  
BANGKRANG, MUANG NONTABURI DISTRICT,  
NONTABURI 11000 THAILAND

FRAME	MOTOR  B099:8557T-300-XAD	
STATUS <b>R</b>		
SHEET	DWG. NO.	REVISION
<b>A3</b>	<b>8061S118-02S</b>	<b>F</b>