


Mizu Drift Dial Wall Top Assembly Lead Free



Prior to Installation

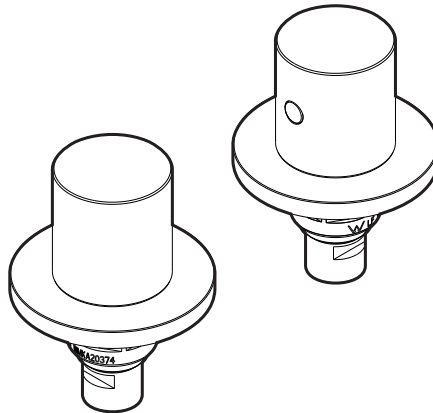

This product complies with the Lead Free requirements of the National Construction Code Volume Three.



**Recommended pressure range
150 – 500KPa.**



**Max Continuous Working Pressure 1000 Kpa.
Max Continuous Working temperature 65 Deg.**




Wall top assemblies must be installed to the requirements of AS/NZS 3500 by a qualified Plumber.



Avoid prolonged exposure to any chemical solution containing chlorides or acids. Surface damage caused by acids will void warranty. Do not use steel wool or any abrasive cleansers. Clean with mild detergent or clear liquid cleansers. Wipe dry with a clean soft cloth.

Diagram

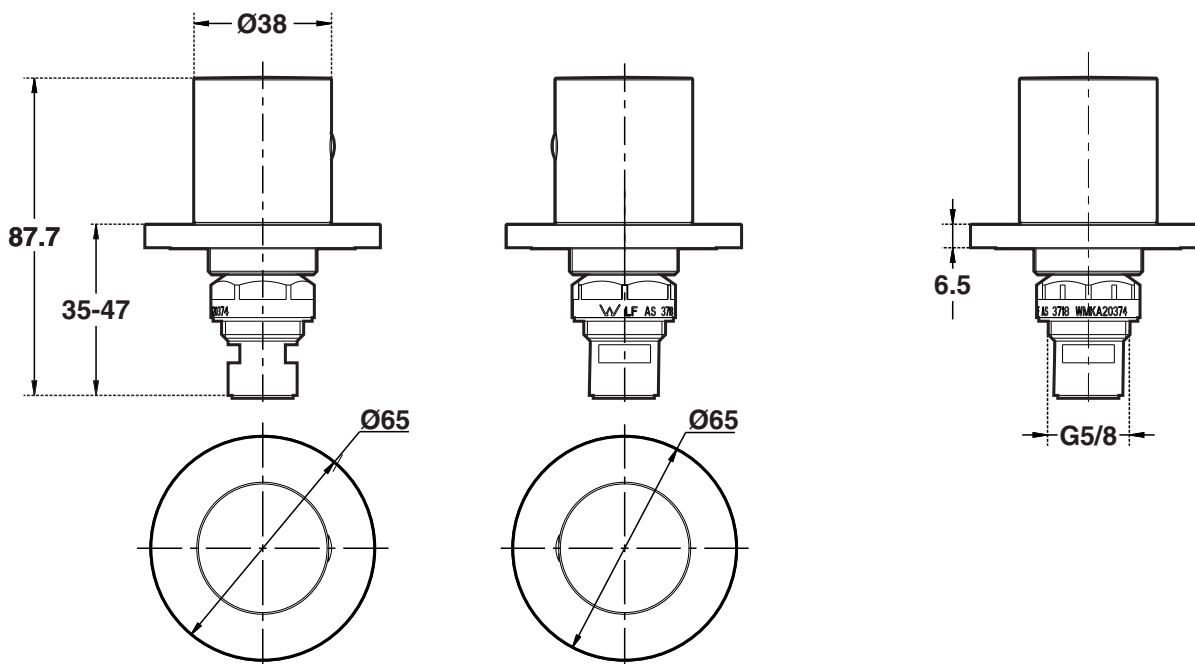


Mizu Drift Dial Wall Top Assembly Lead Free

Installation Instruction

1. Check the breach is between 5-20mm from the finished wall.
2. Check that the seats in the wall breach are in good condition and free from foreign materials, reseal if required.
3. Separate the locknut and fibre washer from cartridge.
4. Grip the cartridge on the hexagonal flats and install cartridge fully into breach until it comes to a firm stop.
Note: Do not tighten the cartridge into position by rotating the spindle.
5. Turn spindle to the off position and turn on the water at the mains. Check that cartridge is fully seated. If dripping occurs then gently tighten the cartridge further until dripping stops.
6. Firmly tighten the cartridge locknut and fibre washer into position.
7. Screw the brass threaded adaptor onto the cartridge locknut.
8. Screw the wall flange with rubber washer fitted onto the brass bush adaptor until it is tight against the wall.
9. Fit plastic glide ring onto wall flange and then screw splined adaptor onto cartridge splined stem.
10. With cartridges in off position fit handles over splined adaptors ensuring correct alignment of hot and cold indication.
11. Fix the handle by tightening the grub screw with an allen key and then push the plug into position.

Component List

Pt. #	Qty.	Description
1	2	Mixer Handle Complete (1-3)
2	2	
3	2	
4	2	Plastic Glide Ring
5	2	Dress Ring Wall Flange
6	2	Rubber Washer
7	2	Brass Threaded Adaptor
8	2	Screw
9	2	Spring Washer
10	2	Splined Adaptor
11	1	Cartridge (Cold) With Lock Nut
12	2	Fibre Washer
13	1	Cartridge (Hot) With Lock Nut
14	1	Allen Key

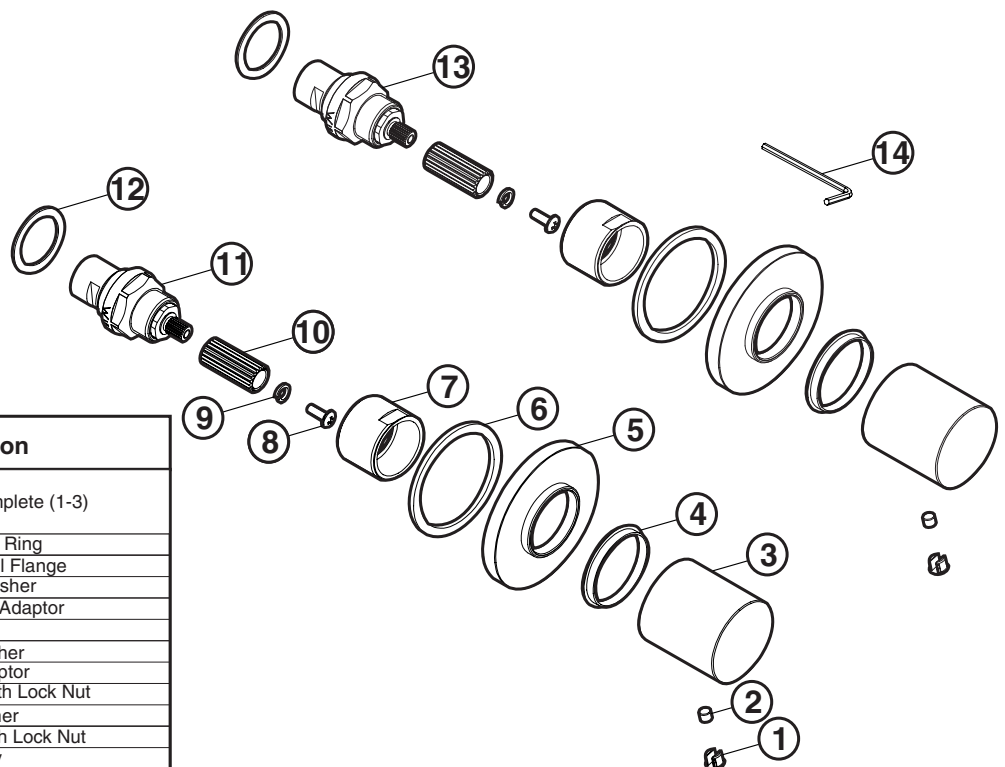

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions at: <https://www.reece.com.au>

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.

