

INSTALLATION GUIDE

Sussex Pure Hob Spa Outlet

Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2003


Recommended working water pressure 300 - 500 Kpa.
Maximum water temperature is 65 deg.C.

PREPARING INSTALLATION

- A 1/2" BSP Male Thread is required to protrude through the finished Hob surface by 10-20mm.
- Apply adequate thread sealant (Teflon Tape) to the protruding 1/2" BSP thread.
- Ensure the Finished Hob Surface is sealed using an appropriate Silicone.

FITTING OFF

The Outlet is supplied assembled. No parts need to be removed. Fit the Outlet to the male 1/2" BSP thread protruding through the Hob. Note: The Outlet must be tightened with the "FRONT" label facing the operator. The Base Flange has 2 flats to assist when tightening. Lower the Cover Flange and tighten the set screw to complete the installation. Once installed, check function of the Outlet and check for water leaks.

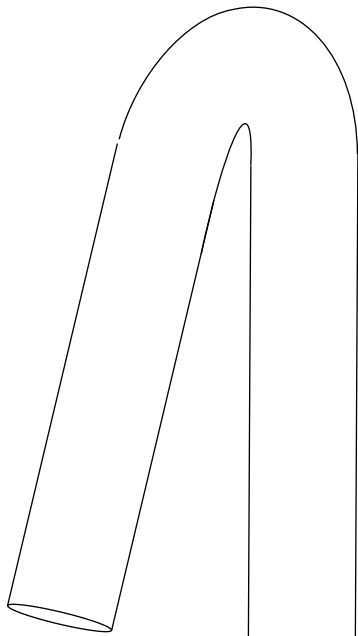

OUTLET

