


mizu

Mizu Drift Filter Tap Lead Free



Installation Instructions

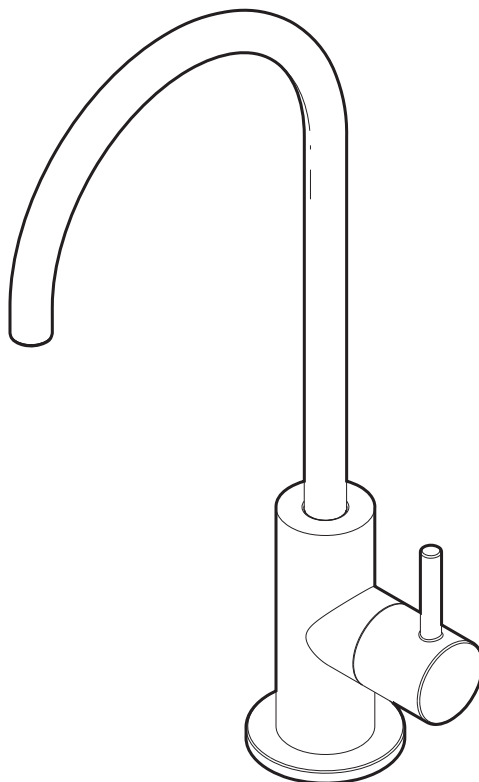

Tap must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your Tap comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the Tap. Taps are factory tested and sealed so as to give the best performance.



Avoid prolonged exposure to any chemical solution containing chlorides or acids. Surface damage caused by acids will void warranty.



Do not use steel wool or any abrasive cleansers.



Clean with mild detergent or clear liquid cleansers. Wipe dry with a clean soft cloth.



Tap should be installed with isolating stop valve prior to filter.



Flush out new pipe work prior to connecting new Tap.



In compliance with lead-free requirements of the National Construction Code Volume 3.



Recommended pressure range 150 – 350KPa.



Max Continuous Working Pressure 650 Kpa.
Max Continuous Working temperature 50 Deg.


NOTE: Do not over tighten hoses into the tap, do not stretch the flexi hoses.
Do not twist hose braiding to tighten hoses, do not excessively bend hoses.
Do not use Teflon tape or thread locking compound on any of the flexi hose connections.
Water filtration system needs to be ordered separately.
Install in conjunction with instructions supplied with selected water filter.

mizu

Mizu Drift Filter Tap Lead Free

Diagram

Mizu Drift Filter Tap Lead Free

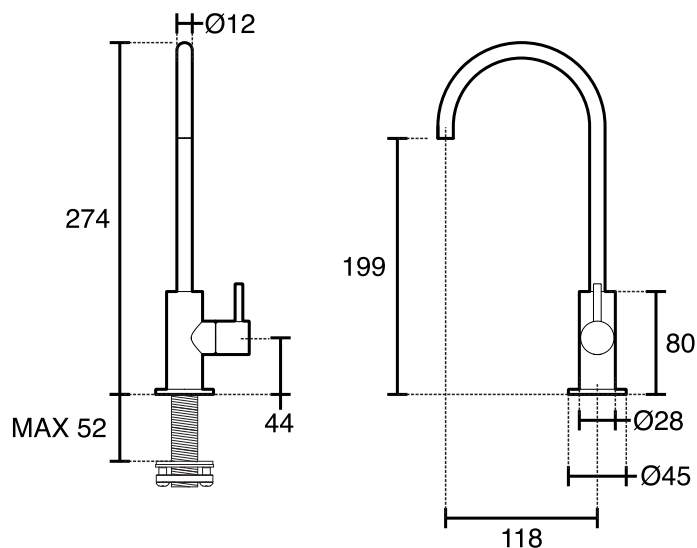


Prior to Install




Flush out new pipe work prior to connecting the Tap.

Note: Tap requires 25-35mm diameter mounting hole.
Note: Maximum mounting surface thickness 50mm.

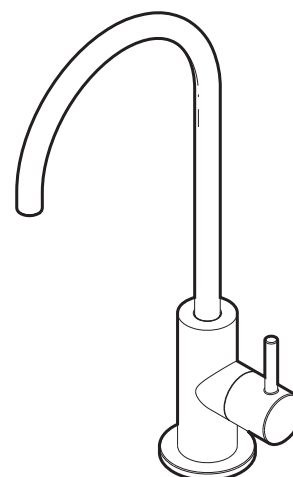

Installation

1. Place Tap Body (B) into mounting hole,

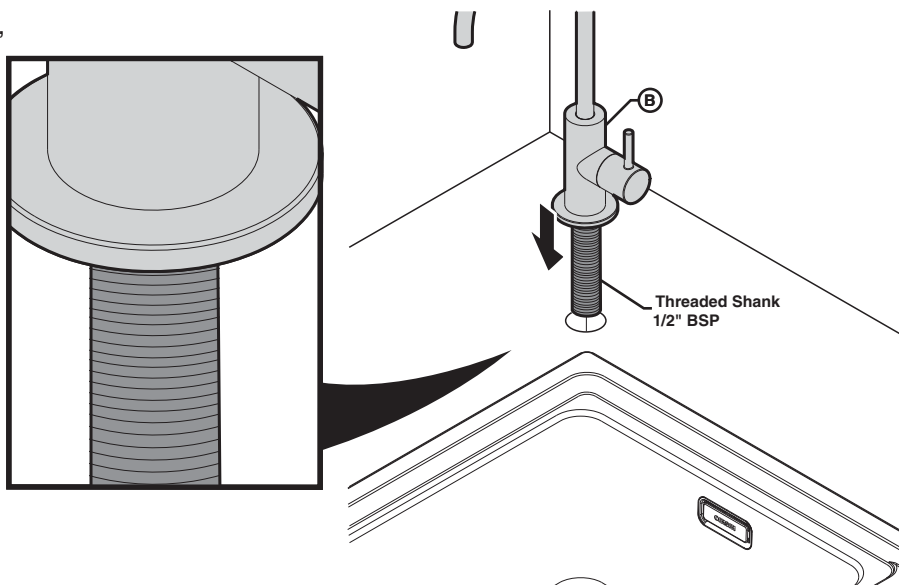

mizu

Mizu Drift Filter Tap Lead Free



Installation

2. From underneath, apply rubber Washer and then metal plate.
3. Secure Tap to sink or benchtop by tightening Lock Nut

Note: Other adapters may be needed if provided adapters are not compatible with filter.



Check for water leaks after installation.

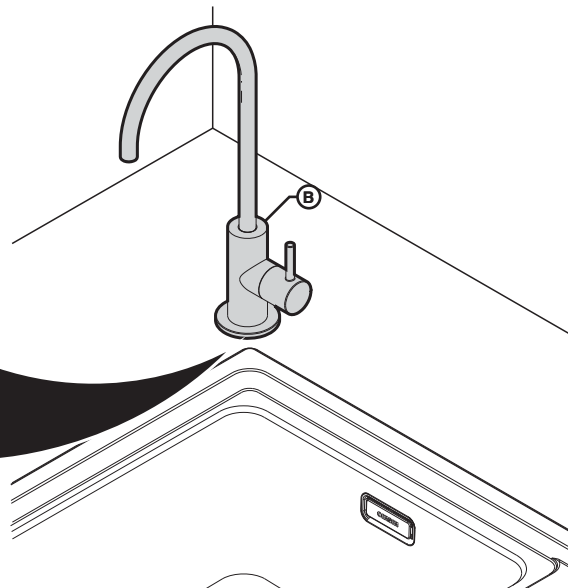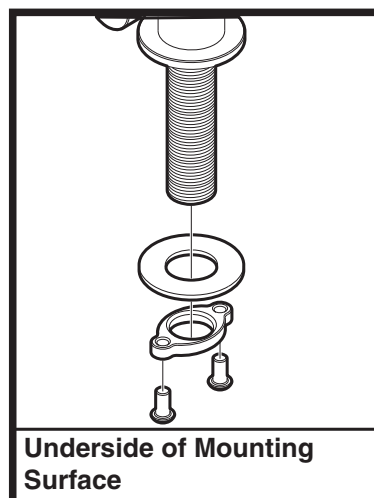

Connection To Filter

Note: The filter tap connection thread is 1/2" BSP.

Filters with a 1/2" outlet:

Use the supplied flexible hose, connect one end to the filter and the other end to the filter tap connection thread.


Filter Systems using 6 mm or 8 mm Water tube:

Install appropriate 1/4" or 3/8" push-fit adapters onto the filter tap connection. Then connect the water tubing from the filter to the adapter. Ensure locking clips are fitted to the push-fit connections.

Note: Additional adapters may be required if the supplied adapters are not compatible with the filter or tap.

Note: Filter system, push-fit adapters and push-fit water tubing are not supplied with the filter tap.

Note: Ensure all water hoses and tubing are not under tension, twisted or kinked.

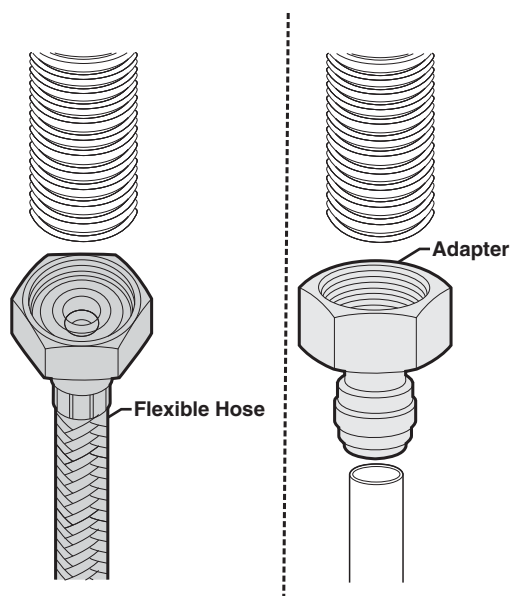

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.

