Arlan

Cabinet Cooler Series

Made for Refrigeration Technicians

More performance

With an intelligent, sleek & robust build, Arlan Cabinet Coolers are designed to provide top quality performance for refrigeration storage cabinets. Available in both medium and low temperature models, the compact footprint is powerful and efficient, allowing for maximum storage capability.

Arlan Cabinet Coolers are perfect for; under-bar cabinets, drink fridges, wine cellars as well as small cool and freezer rooms. For larger medium temperature applications, the Arlan Dual Coil series deliver a greater level of performance and output.

More choice

Single Fan Unit

One fan, ideal for smaller fridges and applications.

Single Fan - Dual Coil Unit

Dual coil for added performance and greater airflow.

Dual Fan Unit

Double the fans for small to medium applications.

Triple Fan Unit

Maximum fan coverage for larger applications.

Features at a glance

Corrosion protection

Blue fin coating on coils and pipework.

Easy electrics

Simple spring clamp switch system for electrical wire connection.



Compact footprint

Maximise space in every cooler with a slimmer design.

Easy to clean & service

Hygienic ABS cover makes cleaning easy for your customers.

Greater capacity

Larger capacity dual coil twin blower coolers (ARDC range) suitable for larger applications.

Simple installation

Accessible mounting points with a low profile.

More quality

Every Arlan cabinet cooler is packed with quality features deigned to increase efficiency and performance to ensure longevity for you and your customers.

Medium temperature series

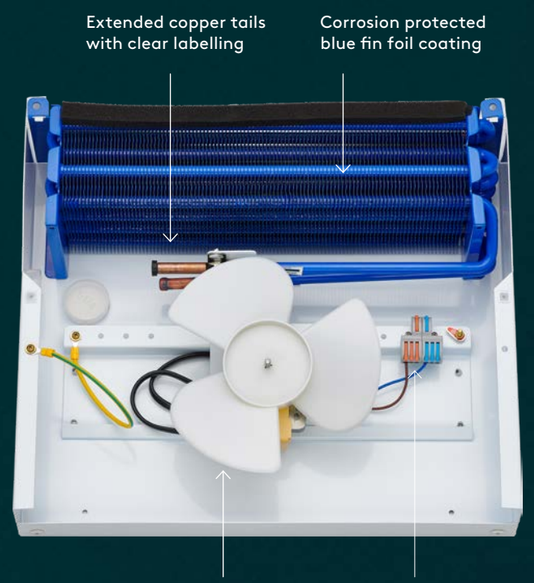

Low temperature series

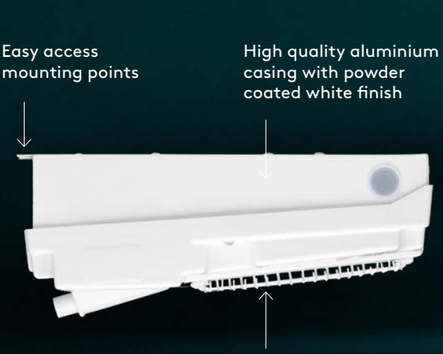

Technical Specs

Single Fan Unit



Dual Fan Unit



Single Fan - Dual Coil Unit



Triple Fan Unit

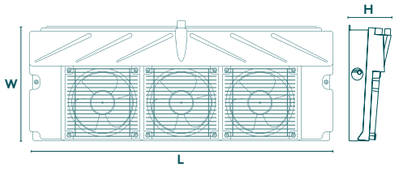

AR Series - Medium Temperature

Cat. No.	Model No.	Capacity (W) @ 6 KTD					Fans (mm)	Motor		Connections (mm)		TX Valve	Overall Dimensions (mm)		
		R404A	R448A	R452A	R134a	R513A		Input (W)	MOC (A)	Suction	Liquid		L	W	H
3510000	AR30	329	315	309	310	296	1 x 200	15	1*0.1A	3/8"	3/8"	Int.	413	381	160
3510001	AR41	435	417	408	410	391	1 x 200	15	1*0.1A	3/8"	3/8"	Int.	413	381	160
3510002	AR53	562	540	528	529	506	1 x 200	15	1*0.1A	3/8"	3/8"	Int.	413	381	160
3510003	AR64	683	655	642	641	614	1 x 200	15	1*0.1A	3/8"	3/8"	Int.	413	381	190
3510004	AR76	809	776	760	761	728	2 x 200	30	2*0.1A	3/8"	3/8"	Int.	595	385	190
3510005	AR100	1092	1048	1027	1024	983	2 x 200	30	2*0.1A	3/8"	3/8"	Int.	595	385	216
3510006	AR135	1432	1374	1346	1347	1289	3 x 200	45	3*0.1A	3/8"	3/8"	Int.	792	405	160
3510007	AR160	1697	1629	1595	1596	1527	3 x 200	45	3*0.1A	1/2"	1/2"	Ext.	792	405	188
3510008	AR200	2121	2036	1994	1995	1909	3 x 200	45	3*0.1A	1/2"	1/2"	Ext.	792	405	210
3510009	AR230	2439	2342	2293	2294	2195	3 x 200	45	3*0.1A	1/2"	1/2"	Ext.	792	405	237

ARDC Series - Dual Coil - Medium Temperature

Cat. No.	Model No.	Capacity (W) @ 6 KTD					Fans (mm)	Motor		Connections (mm)		TX Valve	Overall Dimensions (mm)		
		R404A	R448A	R452A	R134a	R513A		Input (W)	MOC (A)	Suction	Liquid		L	W	H
3510018	ARDC45	455	437	428	428	410	1 x 250	70	0.36A	3/8"	3/8"	Int.	613	385	180
3510019	ARDC60	606	582	570	570	545	1 x 250	70	0.36A	3/8"	3/8"	Int.	613	385	180
3510020	ARDC80	808	776	760	760	727	1 x 250	70	0.36A	3/8"	3/8"	Int.	613	385	180
3510021	ARDC100	1010	970	949	950	909	1 x 250	70	0.36A	3/8"	3/8"	Int.	613	385	180
3510022	ARDC120	1212	1164	1139	1140	1091	1 x 250	70	0.36A	1/2"	1/2"	Ext.	613	385	195
3510023	ARDC160	1616	1551	1519	1520	1454	1 x 250	70	0.36A	1/2"	1/2"	Ext.	613	385	195
3510024	ARDC185	1869	1794	1757	1757	1682	1 x 250	70	0.36A	1/2"	1/2"	Ext.	613	385	246

ARL Series - Low Temperature

Cat. No.	Model No.	Capacity (W) @ 6 KTD					Fans (mm)	Motor		Defrost Heater (A) (mm)	Connections (mm)		TX Valve	Overall Dimensions (mm)		
		R404A	R448A	R452A	R134a	R513A		Input (W)	MOC (A)		Suction	Liquid		L	W	H
3510010	ARL40	392	384	396	369	353	1 x 200	18	1*0.1A	1.6	3/8"	3/8"	Int.	417	385	160
3510011	ARL50	490	480	495	462	441	1 x 200	18	1*0.1A	1.6	3/8"	3/8"	Int.	417	385	185
3510012	ARL60	606	594	612	572	545	2x 200	36	2*0.1A	2.3	3/8"	3/8"	Int.	599	385	185
3510013	ARL80	784	768	792	739	706	2x 200	36	2*0.1A	2.3	3/8"	3/8"	Int.	599	385	210
3510014	ARL100	980	960	990	924	882	3x 200	48	3*0.1A	3.4	3/8"	3/8"	Int.	792	405	160
3510015	ARL120	1212	1188	1224	1142	1091	3x 200	48	3*0.1A	3.4	1/2"	3/8"	Ext.	792	405	185
3510016	ARL150	1515	1485	1530	1428	1364	3x 200	48	3*0.1A	3.4	1/2"	3/8"	Ext.	792	405	210
3510017	ARL170	1666	1633	1683	1570	1499	3x 200	48	3*0.1A	3.4	1/2"	1/2"	Ext.	792	405	240

R404A and R134a ratings based on -4°C SST for medium temperature models and -24°C for low temperature models
R448A, R452A and R513A data based on mid point calculations

Arlan

Simply Greater.

All products enjoy a product replacement warranty.
For full warranty details visit actrol.com.au

V2

ACTROL™