



mizu


Mizu Hob Mixer Set Lead Free

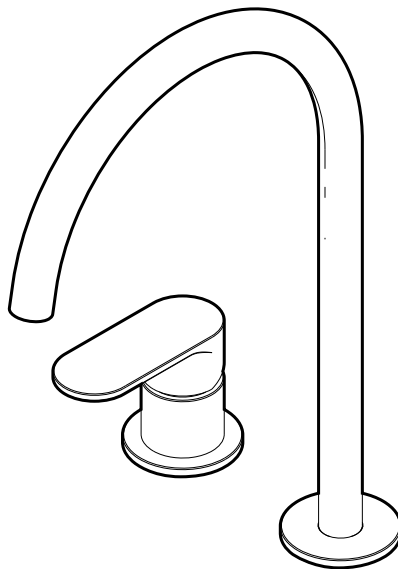


Mixer Sets



Drift



Dial



Soothe

Installation Instructions

Important



Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. The mixers comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give best performance.

Important



In compliance with the lead-free requirements of the National Construction Code Volume 3.

Important



Clean with mild detergent or clear liquid cleansers. Wipe dry with a clean soft cloth.

Important



Do not use steel wool or any abrasive cleansers.

Important



Avoid prolonged exposure to any chemical solution containing chlorides or acids. Surface damage caused by acids will void warranty.

Important



Recommended pressure range 150 – 500kPa.

Important




Max Continuous Working Pressure 1000 kPa.
Max Continuous Working Temperature 65c.

mizu

Mizu Hob Mixer Set Lead Free

Diagram

Hob Mixers

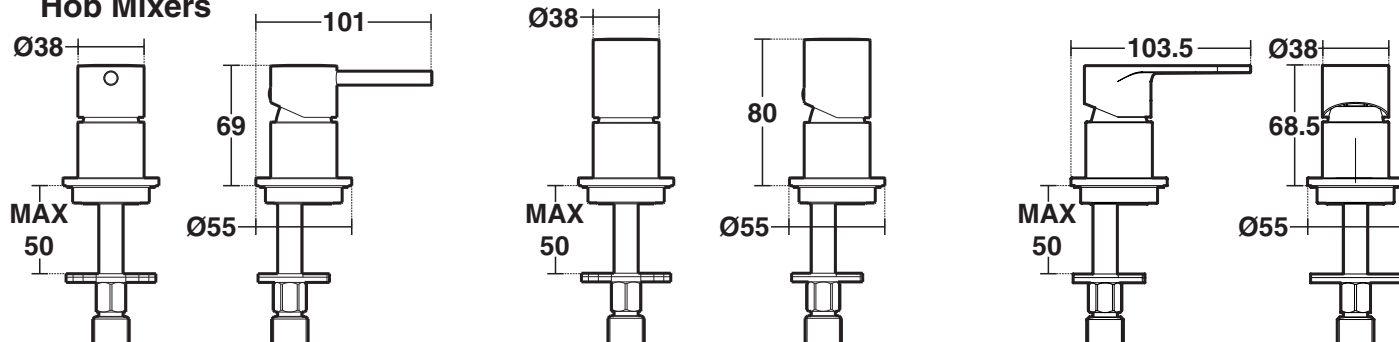


Drift Hob Mixer
Lead Free

Dial Hob Mixer
Lead Free

Soothe Hob Mixer
Lead Free

Outlets

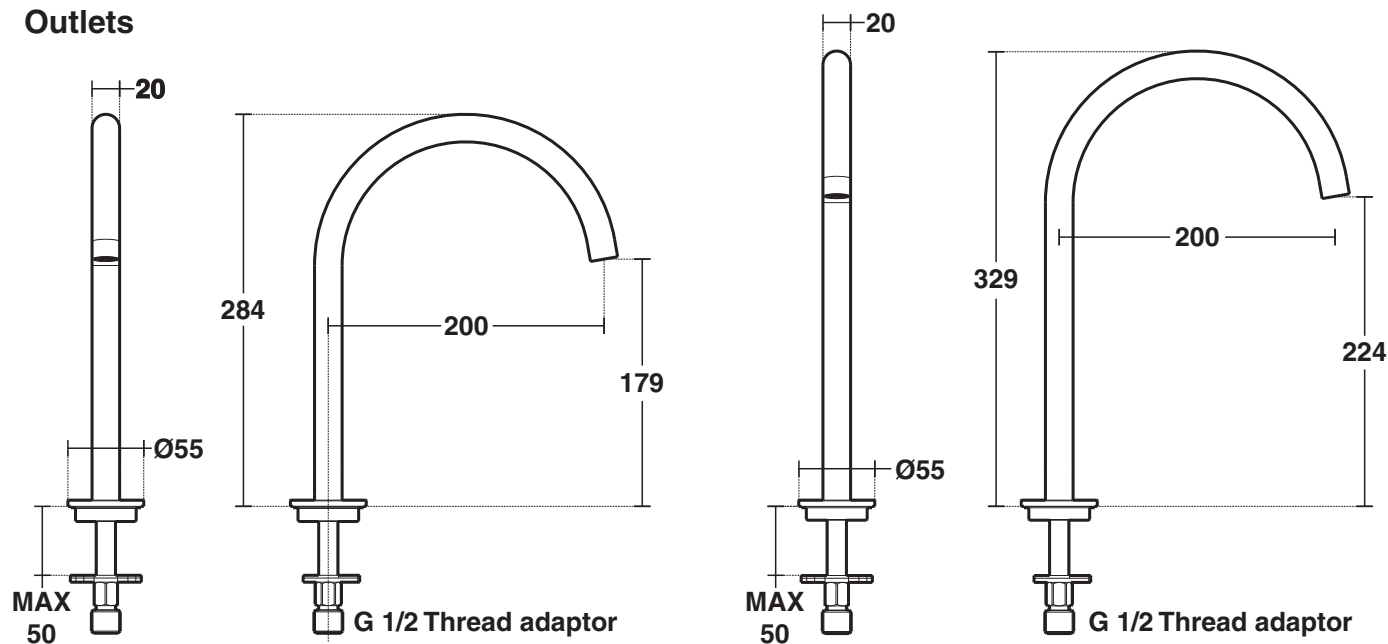

Mizu Hob Swivel Outlet Lead Free

Mizu Extended Hob Swivel Outlet Lead Free

Installation

Important



Flush out new pipe work prior to connecting new mixer.

Important



All mixers should be installed with isolating stop valves.

Note: This tap is suitable for high pressure applications where both hot and cold water supply pressures are at 150kpa or above.

Note: This mixer set is not suitable for installation over baths.



mizu



Mizu Hob Mixer Set Lead Free

Installation



1. Place Hob Mixer and Spout (A) into mounting hole.

Note: If installing on a mounting surface thinner than 10mm, ensure supplied white spacers is used.

Note: DO NOT use teflon tape on threads.

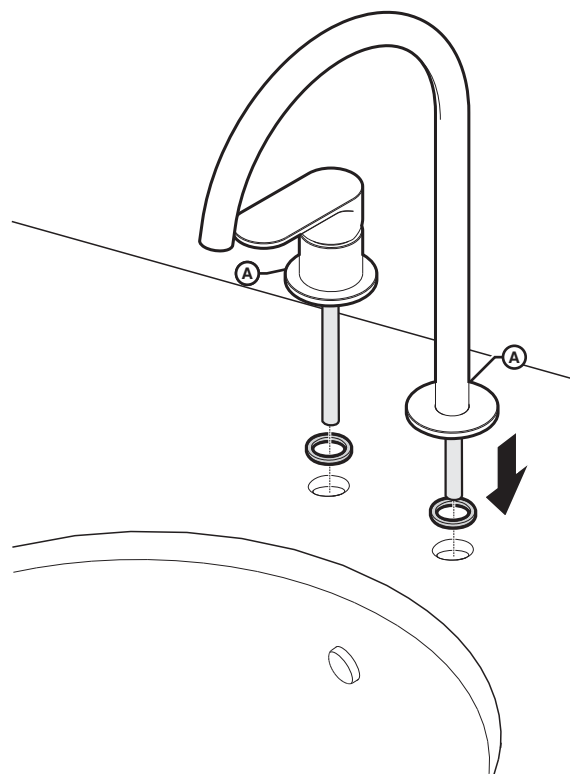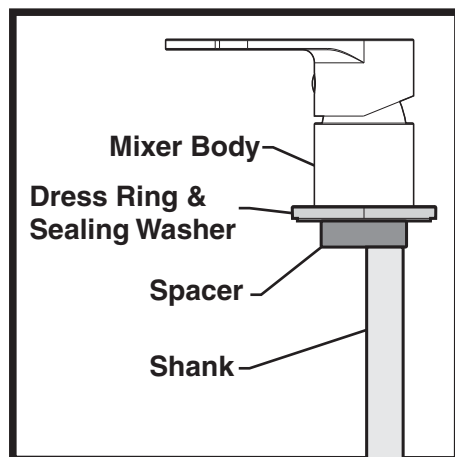

3. Connect both hot and cold Flexible Hoses (B) to the Hob Mixer. Hand tight and then half a turn further using a wrench.
4. From underneath, apply Horseshoe Washer (C) prior to positioning Horseshoe Plate (D).
5. Lock mixer to basin or benchtop by tightening Lock Nuts (E).

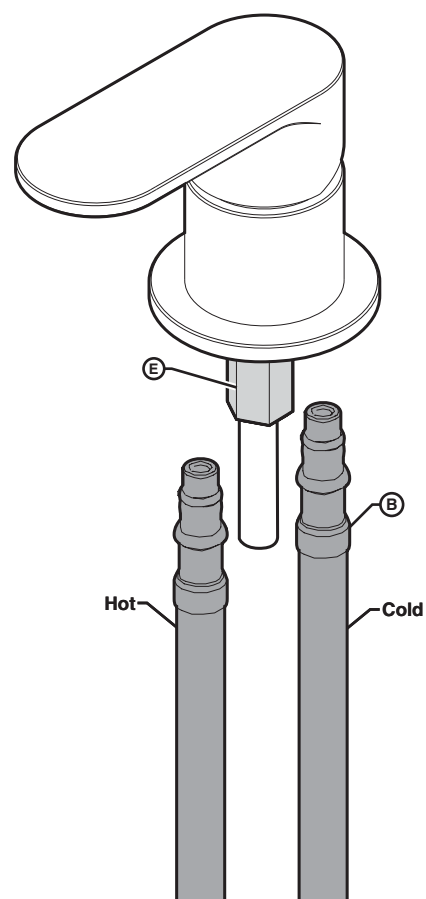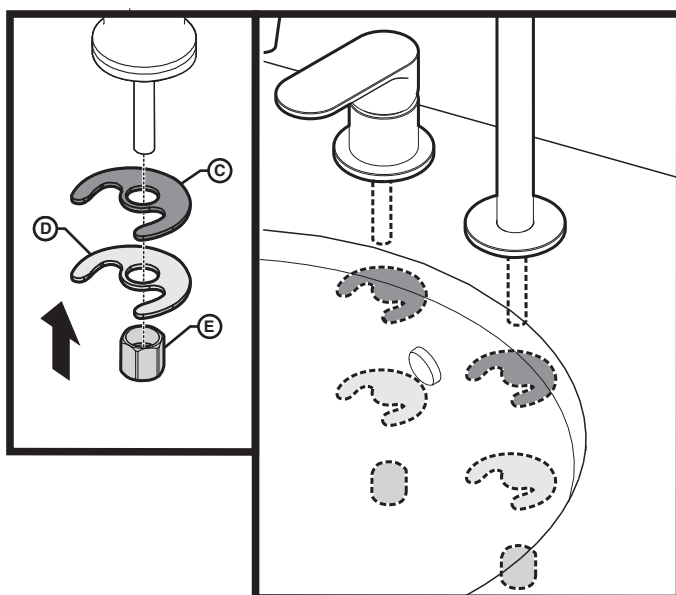

mizu

Mizu Hob Mixer Set Lead Free

Installation

- Fit hose 1/2" BSP Adapter (F) to shank ends. Ensure Rubber Washer (G) is seated correctly.
- Connect both Hot and Cold Flexible Hoses to their respective water supplies.
- Ensure that Hoses are not under tension, twisted or kinked.

Note: Hoses must have minimum bend radius of 30mm.


- Connect the Flexible Bridging Hose (H) to the mixer and outlet shanks.

Important



Check for water leaks after installation.

Note: To lock Outlet into position, use supplied allen key to tighten grub screw located at back base of Outlet.

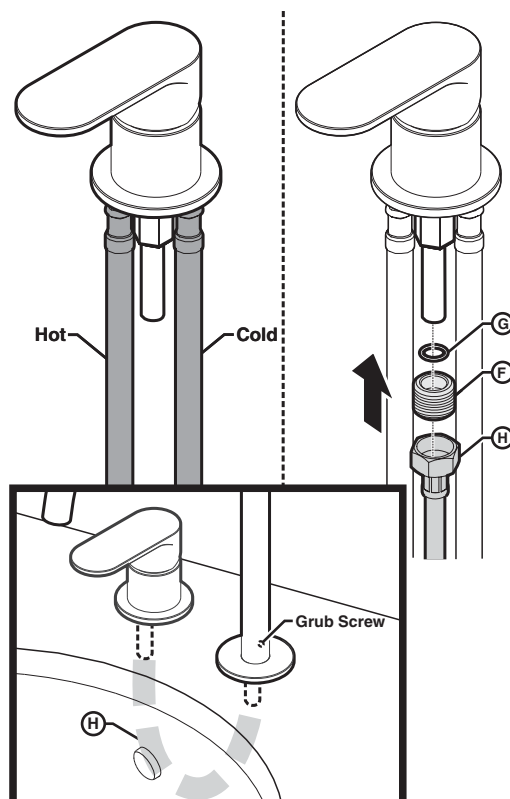


Servicing - Cartridge Replacement & Aerator Removal

- Remove Decorative Cover (I) and unscrew Grub Screw (J) using allen key.
- Lift off the Handle (K) and remove Cartridge Dome (L), unscrew the Brass Lock Nut (M) and lift out Cartridge (N).
- Replace Cartridge (N), Lock Nut (M), Cartridge Dome (L) and Handle (K).
- Reassemble Grub Screw (J) and push in Decorative Cover (I).

- For removal of Aerator (O) to clean, use supplied Aerator Tool (P).

Note: Outlet is supplied pre-fitted with 6 Star flow restricted aerator. To convert to 5 Star, a spare flow restricted aerator with tool is supplied which can be fitted once 6 Star aerator is removed.

Note: Aerator with flow controller must be tightened firmly with tool provided to prevent removal by hand.

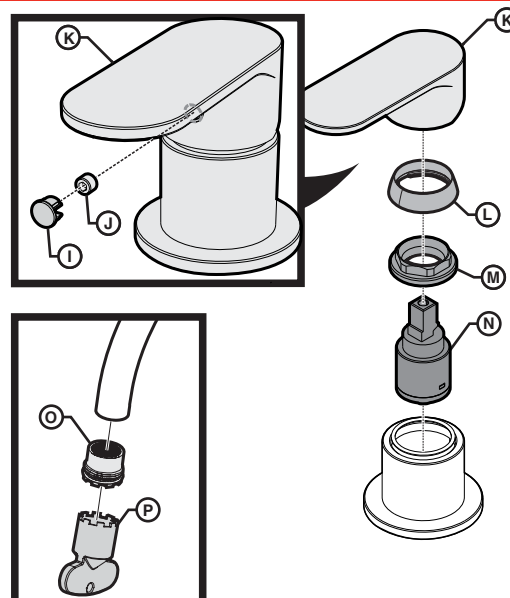

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.

