Pure

Basin Set

SUSSEX

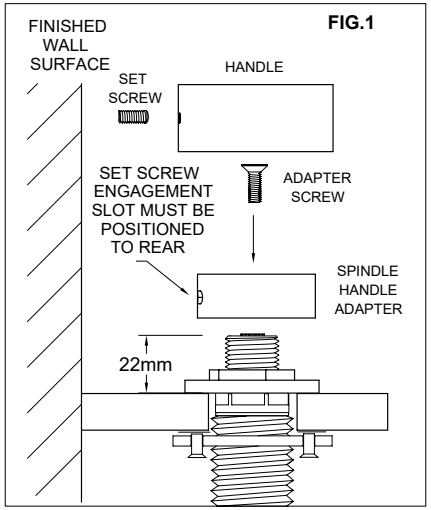

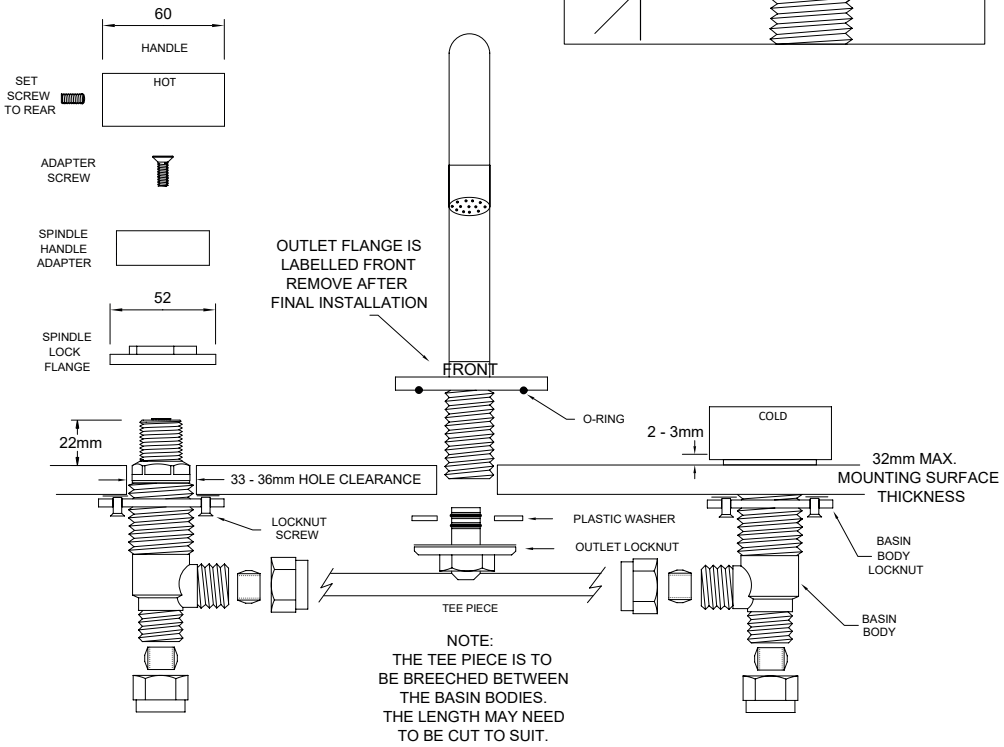

Product codes:

MPBS.01
MPVBS.01

Install Preparation:

- Maximum Bench Thickness 32mm with Standard Spindles supplied.
- 33 - 36mm Hole Clearances.

Under Mount Installation:

- The Basin Bodies are supplied with the Spindles fitted ready for installation. (No need to separate)
- Fit Tee Piece to Basin Bodies to create an assembly.
- Measure the distance between the Basin/Hob clearance holes and if required cut the Tee Piece to suit.
- Place the Outlet Locknut and Plastic Washer over the fitting of the Tee Piece. (As shown)
- Align the Basin Body assembly and fit through the mounting surface.
- Fit the Spindle Lock Flanges to support the assembly.
- Adjust the assembly to ensure the distance from the top surface to end of Spindle is 22mm. (As shown)
- Working from underneath tighten the Basin Body Locknuts to make contact with the underside of the mounting surface.
- To complete the installation, tighten the Locknut Screws. (Tighten well)

Outlet Fit Off:

- Pass Outlet through mounting surface to Tee Piece and secure by tightening Outlet Locknut.
- Outlet must be secured with the “FRONT” label facing the user. Remove label after final installation.

Handle Fit Off (See FIG.1) :

- Attach the Spindle Handle Adapter and ensure the Set Screw engagement Slot is positioned to the rear.
- Fit and tighten the Adapter Screw to secure the Spindle Handle Adapter.
- Connect Handle to the Spindle Handle Adapter.
- Align the Handle so that the Set Screw locates into the Engagement Slot at the rear.
- Fine tune the Handle position and then tighten the Set Screw using a 2.5mm Allen Key. (Tighten well)
- Note the Handle should have 2-3mm clearance from the mounting surface.

Plumbers note:

Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2021
Recommended working water pressure 300 - 500 Kpa. Maximum water temperature is 65°C
After installation, ensure that tapware functions correctly without leaks.
Please ensure a copy of the Installation Instructions are left with the end user for future reference.

Lead Free
AS 3718
LIC. 20081

reece

www.reece.com.au

While we aim to ensure the specifications shown are correct at time of printing, Sussex Taps reserves the right to make modifications without prior notice. Always use the physical product for accurate measurements. Dimensions are subject to change without notice. All measurements are shown in millimetres. This product complies with lead free requirements.

Copyright © Sussex Taps