

ACB2400G Specifications

Frame	20 mm x 20 mm x 1.6 mm Welded Steel Tube
Mesh	25 mm x 25 mm x 3 mm Welded Mesh - Welded to Frame
Cage Depth	600 mm deep OD - 580 mm deep ID
Cage Width	595 mm OD - 555 mm wide IDØ
Cage Length	2460 mm OD, 2420 mm ID
Mounting Brackets	80 mm x 50 mm Mounting Brackets. Optional holes allow the cage to be mounted flush to the ground/to a wall, or with 25 mm or 50 mm clearance for pipes and conduits
Cage Safety	Front Corners are 90 mm radius to minimise personal injury
Assembly Required	ACB2400B is assembled using 2 x ACB1200G plus JFB0001 joining frame (see diagram) **A** End Panels (2) **B** Side Panels (4) **C** Corner Panels (4) **D** Front Panel (2) **E** Brackets (12) **F** Fixings M6x12 (12), M6x30 (30) **G** Joining Frame (1)
Service Access	All panels (except sidepanels) are easily removable for full service access
Assembly Fixings	All Fixings supplied - M6 tamper proof Torx bolts, washers and tool
Coating	Two stage protection with Hot Dip Galvanised and Black Powder Coating

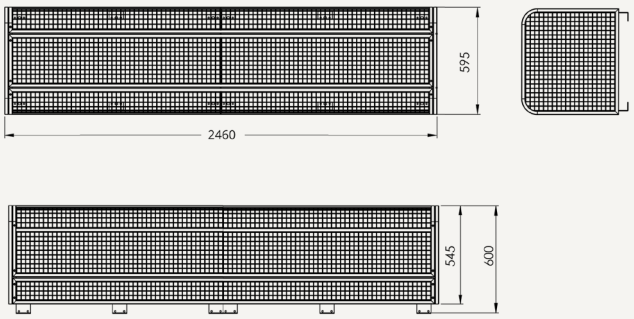

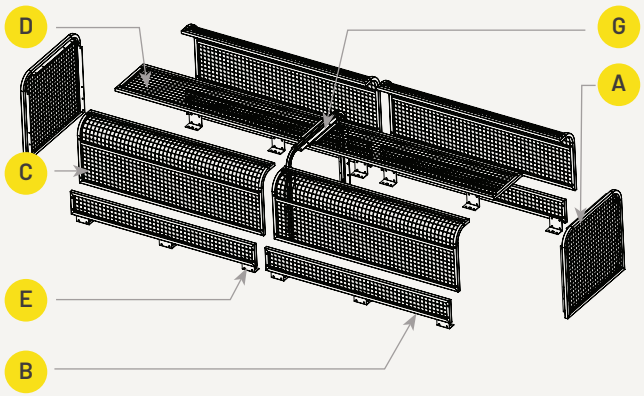

P (03) 9989 5850
E sales@avantageaustralia.com.au
W avantageaustralia.com.au

A 74 Scanlon Drive
Epping, Victoria, 3076
Australia

AVANTAGE
AUSTRALIA