

# SUSSEX


## Sussex Pure Hi-Rise Shower Curved with 250mm Shower Head (3 Star)

**Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2003**

**Recommended working water pressure 300-500kpa.  
Maximum water temperature is 65 deg.C.**

### Fit Off

- Remove Inlet Fitting by loosening the Set Screws.
- Ensure the wall penetration is sealed prior to connecting any fittings.
- Apply thread tape or appropriate sealant to Water Feed Thread and attach Inlet Fitting using 10mm Allen key.
- Fit the Hi-Rise Shower Arm as assembled onto the Inlet Fitting, secure by tightening the Set Screws.
- Attach Shower Head.
- Test function and water flow.
- Check for water leaks.

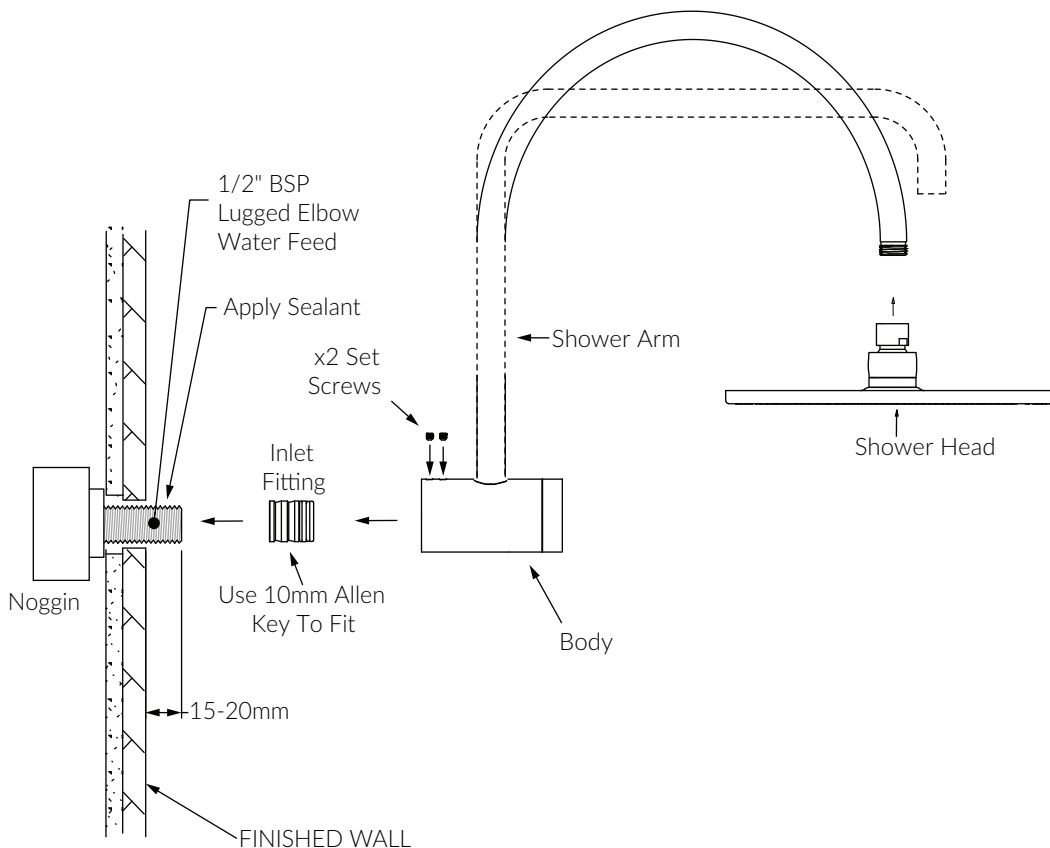

**Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference**