

SUSSEX


Sussex Pure Round Handshower with Fixed Water Inlet Wall Bracket (3 Star)

Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500kpa.
Maximum water temperature is 65 deg.C.

Fit Off

- Remove Inlet Fitting by loosening the Set Screws.
- Ensure the wall penetration is sealed prior to connecting any fittings.
- Apply thread tape or appropriate sealant to Water Feed Thread and attach Inlet Fitting using 10mm Allen key.
- Fit the Supply Post Body as assembled onto the Inlet Fixing, secure by tightening the Set Screws.
- Attach Hose and Hand Shower.
- Optional Check Valve to be used if required.
- Test function and water flow on Hand Shower.
- Check for water leaks.

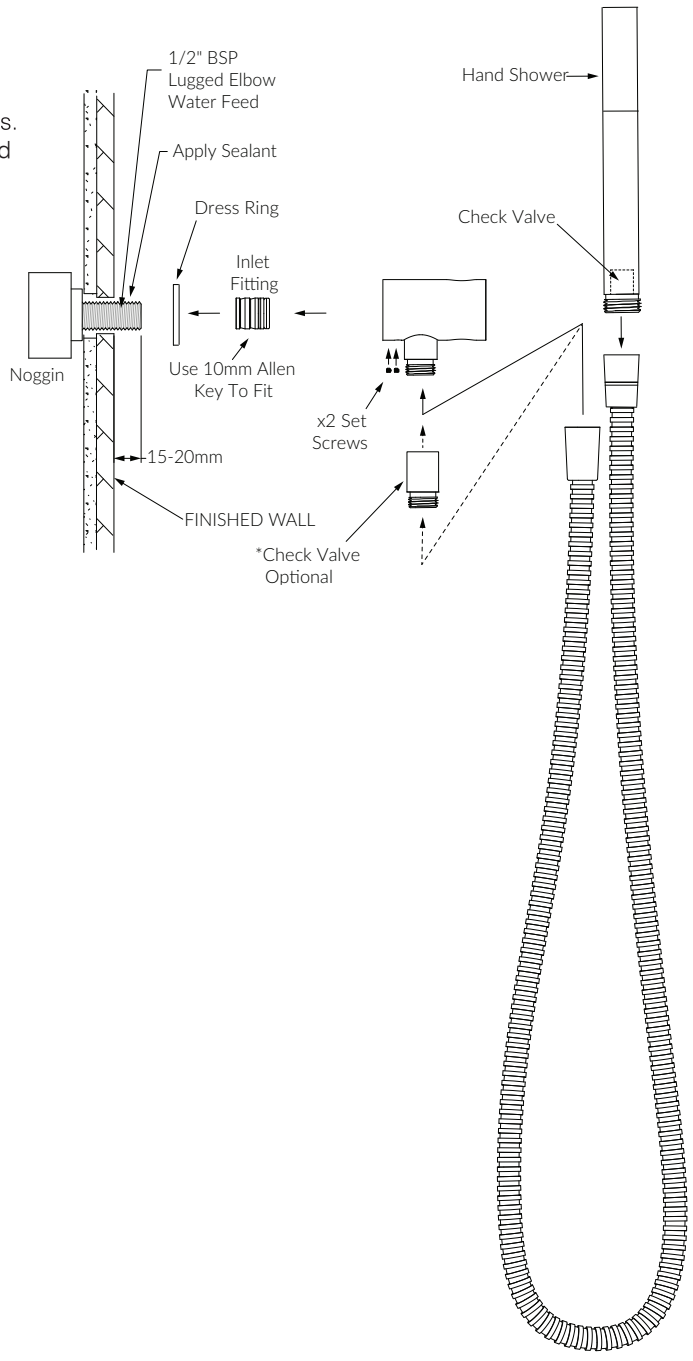

Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference