
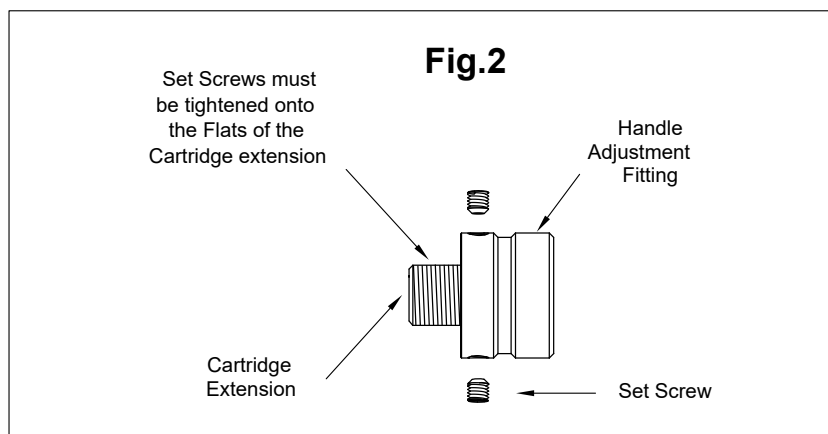


# SUSSEX

## Sussex Pure Progressive Hob Mixer Tap

Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300 - 500 Kpa.  
Maximum water temperature is 65 deg.C.

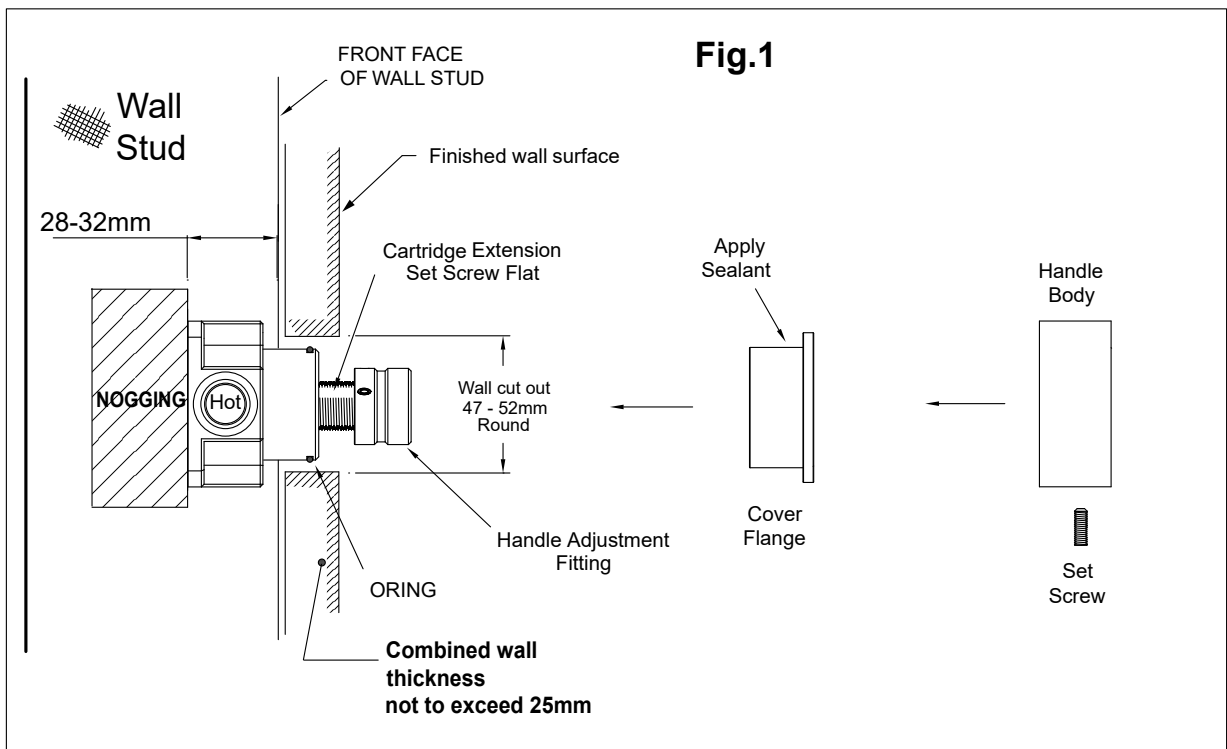

Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference

# SUSSEX

## Sussex Pure Progressive Hob Mixer Tap

### ROUGH IN PLUMBING

Prior to installing, calculate the finished wall thickness to ensure enough adjustment is available when fitting the Handle. The Mixer is supplied with a plastic cover to protect the Mixer during Plastering and Tiling.

To aid in Plumbing, 2 Outlet Ports have been provided in the Mixer Body (Shower and Bath ), only 1 Outlet Port can be used.

Apply thread sealant to the supplied Pressure Plug and seal either the Shower or Bath Outlet Port not being used. The Hot/Cold Ports are marked on the shoulder of the Mixer body to indicate the correct mounting position.

Set a Nogging between 28 - 32mm back from the face of the wall stud. (see Fig. 1).

Using the screws provided, fix the Mixer to the Nogging.

Ensure the Mixer is aligned square and well secured.

Flush all water feed lines. Pipes and fittings must be free from any dirt and debris before connecting to the Mixer.

Once all water fittings are connected, check Hot/Cold water flow by operating the Mixer.

Check for any water leaks.

Once all checks have been made, leave the Mixer in the closed position and replace the protective cover.

Store remaining parts in a safe place until wall coverings have been completed and final fit-off is required (Dress finishing)

### ***Plumber please note:***

On-site high pressure line testing must be conducted with the Mixer in the closed position. (STATIC TEST ONLY)

Under no circumstances is the Mixer to be opened when exceeding the maximum stated water pressure.

At the completion of the testing, do not relieve any high pressure by opening the Mixer.

Exposing the internals of the Mixer Cartridge to higher than specified water pressures, will void the manufacturer's warranty

### DRESS FINISHING AND HANDLE ADJUSTMENT

Prior to fit off ensure the correct size cut out around the Mixer has been achieved.(see Fig.1)

Apply sealant to the Cover Flange and fit to the Mixer until the shoulder meets the wall.

Once the Cover Flange has been fitted, apply a small amount of sealant to the inside of the Cover flange to water proof the installation.

Fit the Handle onto the Adjustment Fitting.

If adjustment is required, remove the Handle and loosen the Set Screws of the Adjustment Fitting.

Wind the Adjustment Fitting to reduce or increase the gap between the Wall and the Handle.

Once the gap from the Wall to the Handle is between 2-3mm, remove the Handle and tighten the Set Screws of the Adjustment Fitting.

When adjusting the Handle gap, ensure the Set Screws are tightened onto the flats of the Cartridge Extension. (see Fig.2)

Do not tighten the Set Screws on the threads of the Cartridge Extension.

Fit the Handle so the Set Screw is positioned at the bottom.(tighten well)

Note the Set screw must engage in the groove of the Adjustment Fitting.