
mizu

Mizu Drift Microphone Handshower (3 Star)

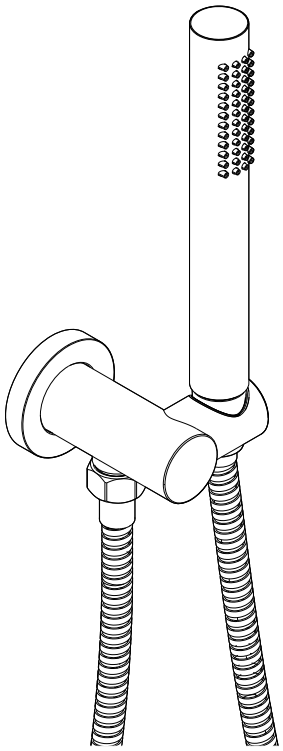

Prior To Installation

Important The Mizu Drift Shower must be installed to the requirements of AS/NZS 3500.1 by a qualified plumber. It comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the product. The Mizu Drift Twin Shower is tested and sealed so as to give the best performance.

Important Where water pressure exceeds 500 kPa, a pressure limiting device must be fitted as per requirement in AS/NZS 3500.1

Important This shower may not be suitable for use with gravity fed water heaters and water supply networks with low and unequal pressure.

Important Upon unpacking, cross-check all components are complete.

Important Recommended pressure range 150 – 500KPa.

Important Max Continuous Working Pressure 1000 Kpa.
Max Continuous Working temperature 60 Deg.


Important Confirm the inlet pipes and check valves are fully installed and thoroughly cleaned; ensure no impurities remain inside the pipelines.

Important After completing installation, inspect all joints and connections for water leakage.


Mizu Drift Microphone Handshower (3 Star)

Diagram

Mizu Drift Microphone Handshower (3 Star)

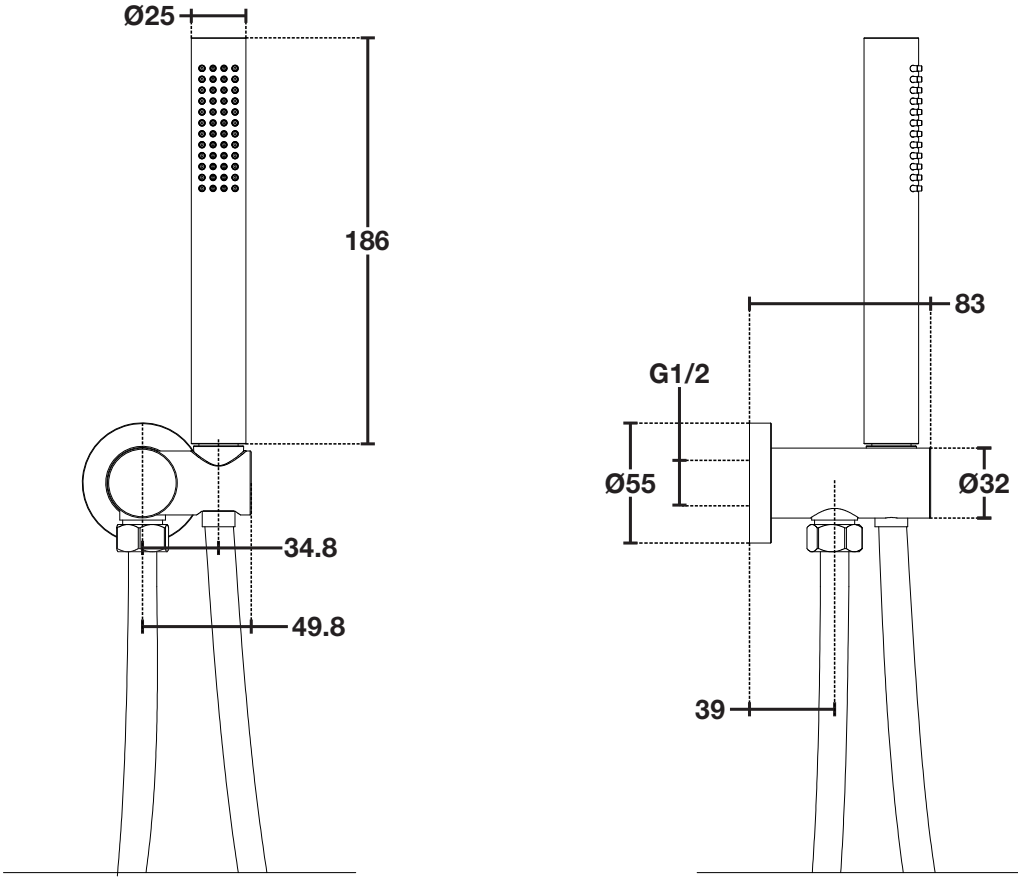

Installation

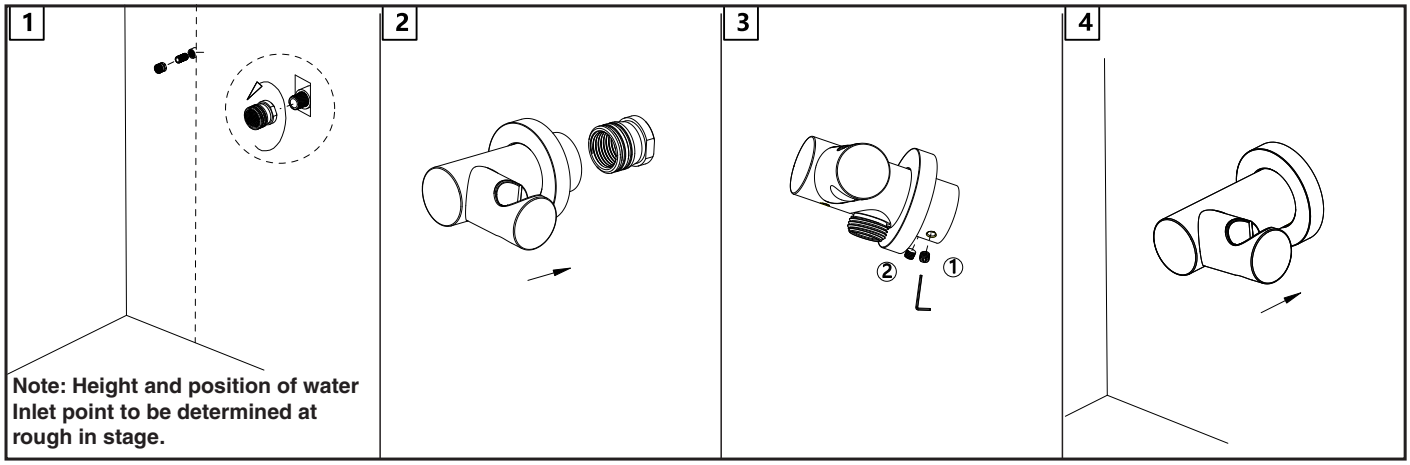

1. Ensure wall penetration is sealed prior to connecting any fittings.
2. Apply thread tape or appropriate sealant to G1/2" Water Feed Thread.
3. Screw the brass adaptor to G1/2" threaded water feed pipe.
Note: Ensure rear of brass adapter is aligned with finished wall.


4. Push assembled wall connection water inlet bracket into brass adaptor.
5. Ensure it is level.

6. Tighten locking screws grub screw with supplied hex key.

7. Push dress wall cover plate to the wall.

Mizu Drift Microphone Handshower (3 Star)

Parts List

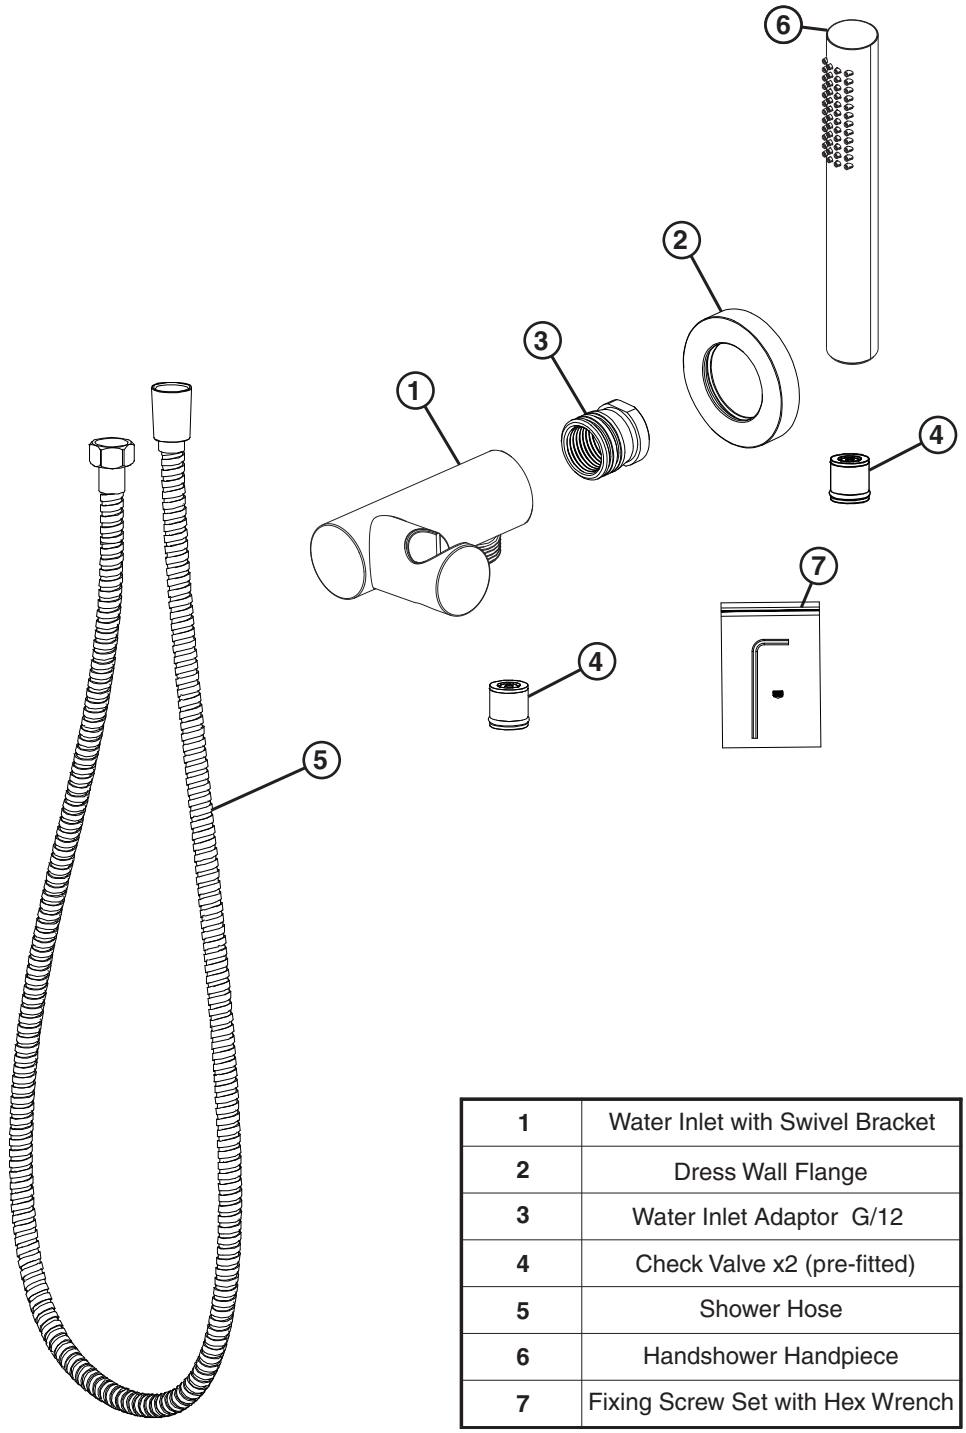

1	Water Inlet with Swivel Bracket
2	Dress Wall Flange
3	Water Inlet Adaptor G/12
4	Check Valve x2 (pre-fitted)
5	Shower Hose
6	Handshower Handpiece
7	Fixing Screw Set with Hex Wrench

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.