





AXA



UNO COUNTER BASINS





Axa Uno 400 Counter Basin



Axa Uno 500 Counter Basin

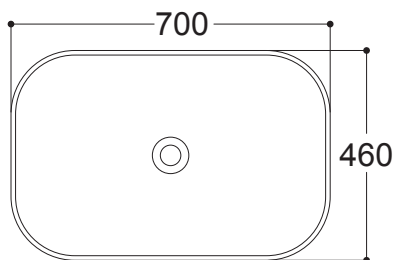

Axa Uno 700 Counter Basin

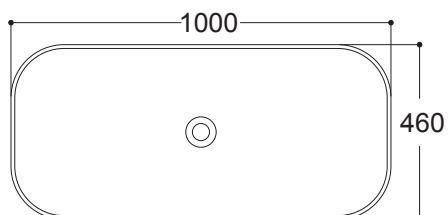

Axa Uno 1000 Counter Basin

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1

AXA

reece

AXA

UNO COUNTER BASINS

SPECIFICATIONS

Recommended use	Domestic, hotel and commercial
Material	Ceramic
Colour	White
Integral overflow	No
Taphole availability	No
Capacity	400 Counter Basin - 8 Litres 500 Counter Basin - 13 Litres 700 Counter Basin - 20 Litres 1000 Counter Basin - 29 Litres
Weight	400 Counter Basin - 10 kg 500 Counter Basin - 12 kg 700 Counter Basin - 15 kg 1000 Counter Basin - 22 kg
Plug and waste	32x40mm non-overflow Waste (not supplied)
Fixing	Sealed to countertop with waterproof sealant

To see the complete Axa range go to www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

INSTALLATION INSTRUCTIONS

1. Cut out 135mm waste hole in bench top.

NOTE:

- **please consider installed position of basin, to ensure minimal water splash from tapware selected.**
2. Fit waste to basin, ensuring watertight seal.
 3. Fit selected waste to basin. Ensure waste is sealed top and bottom.
 4. Apply waterproof sealant (not supplied) to the rim of the basin.
 5. Fit basin onto the bench top and press firmly all around to achieve good seal.
 6. Remove surplus sealant.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

AXA

reece