



Dimensions are nominal only

SPECIFICATION	
Recommended Use	Domestic, hotel and commercial
Rim Configuration	Box Rim
Bowl Configuration	P Trap (Converts to S using plastic S-bend provided)
Set Out	P Trap: 180mm, S Trap: 125mm-225mm
Pan Fixing	Screwed to the floor using brackets (supplied) and bedded with sealant
Cistern Fixing	Top-fix cistern bolted directly to the bowl
Seat	Matching top-fix, soft-close, quick-release seat supplied with suite
Water Inlet	Back inlet, left hand side
Cistern	4.5/3 litre dual flush
Inlet Valve	Recommended max. working pressure 1000kPa
Weight	Pan: 29.8kg, Cistern: 10.7kg
WELS	4 Star WELS Rating
Standards	AS1172.1 and AS 1172.2



To see the complete Roca range go to www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

Soapy water or approved bathroom cleaners.

This bathroom product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Page for full Terms and Conditions.









INSTALLATION

The GAP BTW A34147T..R


 H_A

720


Product code **H A34247W..R 400**

A34247C..R 440 760



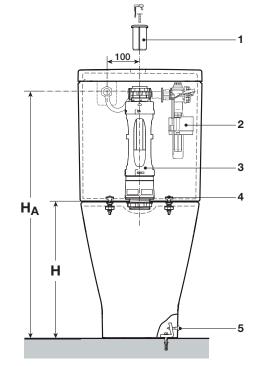

1 - AH0001700R
2 - A822096400 W
3 - AH0000100R
4 - AV0028800R
5 - AV0009400R

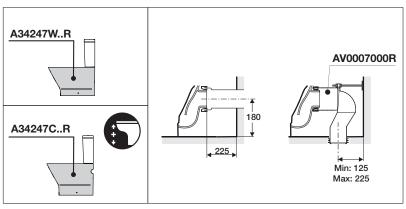











INSTALLATION

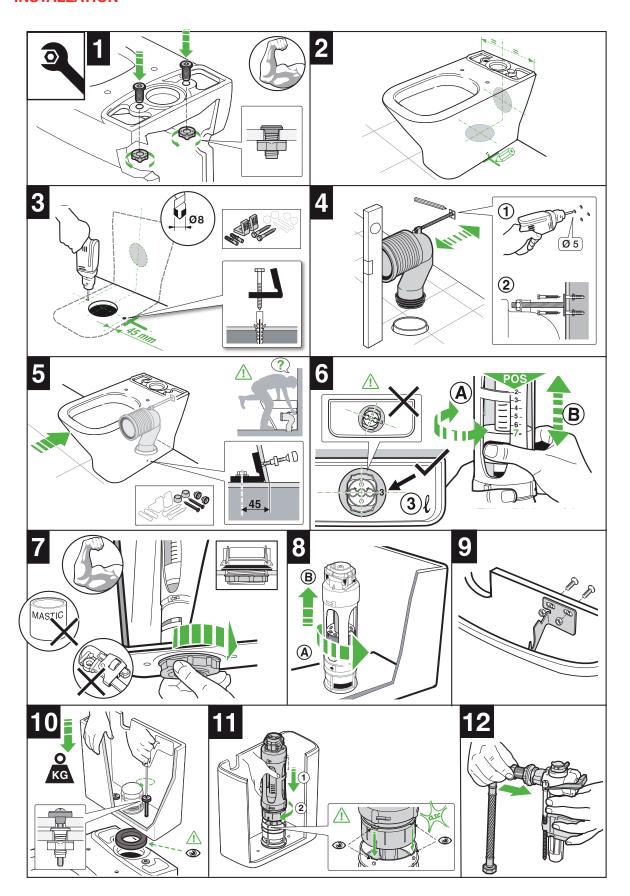





INSTALLATION

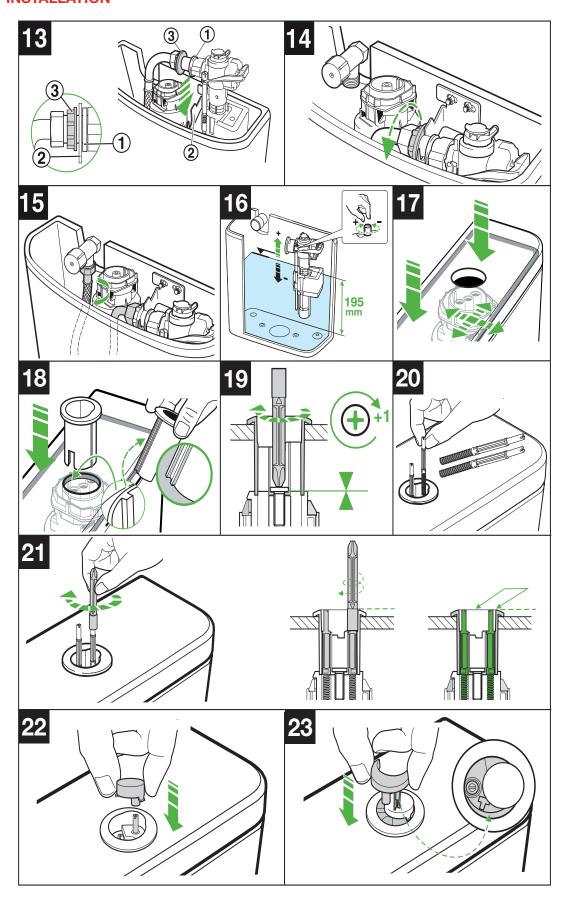





MAINTENANCE

