

BASE MK2 **SINK MIXER**





	omestic, hotel and commercial hrome
	·
Colour availability	hrome
Colour availability C	
Pressure rating N	laximim continuous operating pressure 1000 kPa
	ote: For best performance and longer life we ecommend 150-500 kPa.
Н	ot and cold water inlet pressure should be equal.
Temperature rating N	laximum continuous working temperature 80°
Water Efficiency 4	Stars. Flow Rate 7.5 L/min
6	Stars. Flow Rate 4.5L/min
Suitable Hot Water Units S	torage Tank: Yes
C	ontinuous Flow: Yes
G	ravity Feed: Not suitable
Standards A	S/NZS 3718



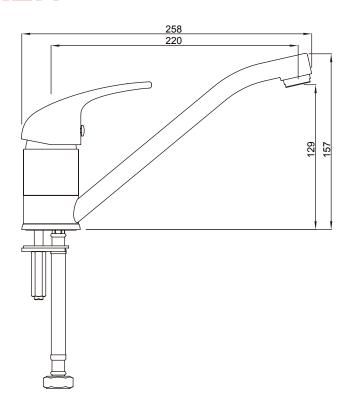



CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions on the last page.





