

# ISSY

## GLIDE LARGE VERTICAL MIRROR



### SPECIFICATIONS

<b>Recommended use</b>	Domestic and Hotel
<b>Weight</b>	8 kg
<b>Colour availability</b>	2 Pac polyurethane- Satin White, Gloss White, Metallic Charcoal, Metallic Silver
<b>Material</b>	Backing- MR MDF
<b>Mounting:</b>	Vertical
<b>Fixing:</b>	Bolted/Screwed to wall by a licensed trades person via french cleat (supplied)



To see the complete ISSY range go to  
[www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

Your frame should be cleaned with warm water and a microfibre cloth, then towel dried.

Always clean spills and water immediately.

To clean mirror surfaces only use 50:50 solution of Methylated Spirits and water applied with a soft microfibre cloth.

**IMPORTANT:** Ammonia or Vinegar based cleaners must NOT be used on mirror surfaces


This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.

**Disclaimer:** Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/ distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer distributor takes no responsibility for printing errors.

Tech Page Version 1

ISSY  
GLIDE LARGE VERTICAL MIRROR

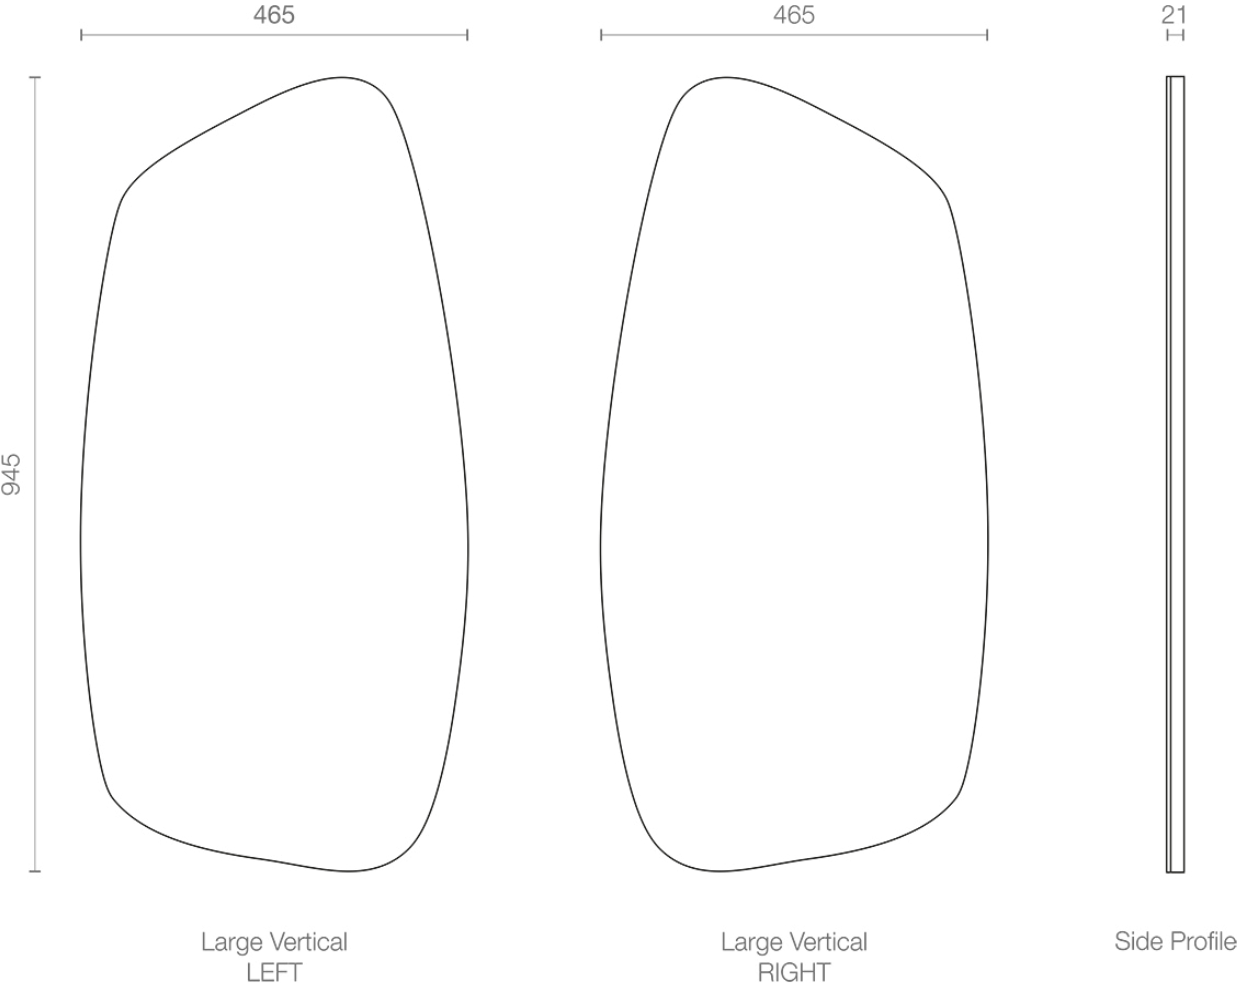

Dimensions are nominal measurements only.

# ISSY

## GLIDE LARGE VERTICAL MIRROR

### INSTALLATION INSTRUCTIONS

#### Important Note

Mirror should be installed by a qualified, licensed trades person

- Prior to installation it is important to inspect the Glide mirror to ensure no damage has occurred in transit. If damage has occurred, or a visible defect exists, **DO NOT** proceed with installation and advise supplier immediately. **No warranty claim for damage will be accepted** if the mirror is installed. This includes scratches to the glass.
- It is recommended that the mirror is protected during installation. Please Note: Manufacturer will not be liable for the cost of installation or removal of the mirror and the **warranty will be voided** if damage occurred during or after installation.




1. Place mirror in the desired position and mark the wall at position **A** shown on the base of the mirror.



2. Using a level, plumb the centre line up the wall

Glide Mirror	X (mm)	Weight (kg)
Small Vertical	388	5
Large Vertical	570	8
Large Horizontal	270	8

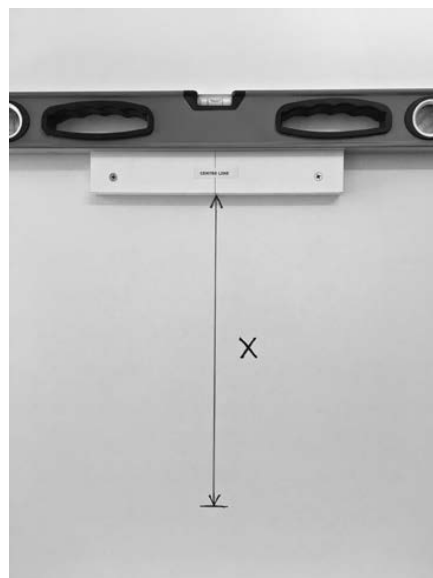

3. Locate the wall bracket using the dimension table below. Dimension X is the distance from the base mark **A** to the underside of the bracket. Suitable screws and wall fixings should be used to **FIRMLY SECURE** the bracket to the wall. **IMPORTANT:** the wall fixings chosen must accommodate the weight of the mirror.



4. Attach each of the 4 self adhesive Bumpons (supplied) to the back of the mirror at the locations shown.

5. Hang mirror on bracket.

Ensure a copy of the installation instructions is left with the end user for future reference