



Backflow Prevention

310 Series SCV 100-150mm



LEAD FREE

Application

Designed for installation on water lines in fire protection systems to protect against both backsiphonage and back-pressure of polluted water into the potable water supply. Assembly shall provide protection where a potential health hazard exists (Low Hazard).

Standards Compliance

Australian Watermark and Standards Mark
UL Classified
FM Approved



Materials


Main Valve Body	Ductile Iron
Access Covers	Ductile Iron
Coatings	Epoxy
Fasteners	Stainless Steel
Internals	Stainless Steel, NORYL
Elastomers	EPDM, Buna Nitrile
Springs	Stainless Steel

Operating Parameters

Max. Working Water Pressure	1200kPa
Max. Working Temperature	60°C
Hydrostatic Test Pressure	2400kPa
End Connections Grooved	AWWA C606


Dimensions & Weights (do not include pkg.)

VALVE SIZE mm	REECE CODE	ZURN CODE	LENGTH mm	WEIGHT kg
100	2120687	100-310ALTCV	419	17.7
150	1013613	150-310ALTCV	572	47.2

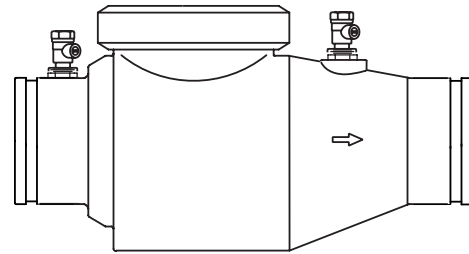

Flow Characteristics

MODEL 310 100mm, 150mm & 200mm (STANDARD & METRIC)

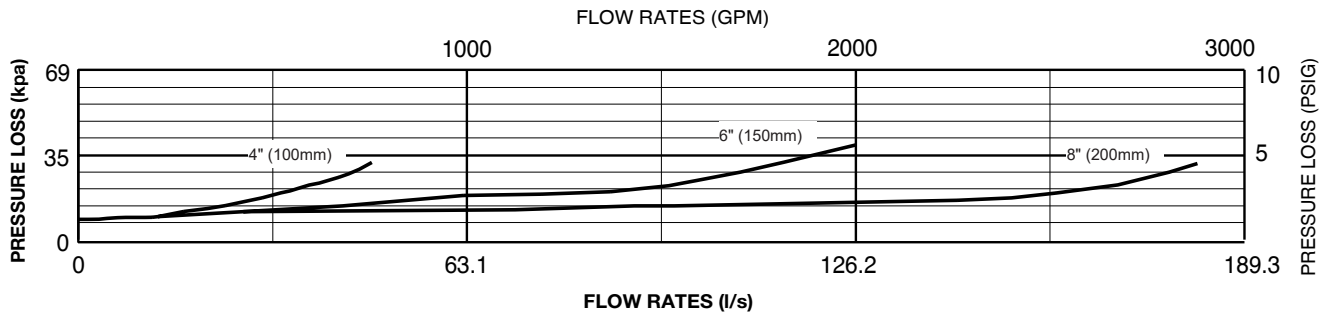

Note: The pressure losses depicted in the tables are for the device only and not the complete assembly.

Typical Installation

Local codes shall govern installation requirements. Unless otherwise specified, the assembly shall be mounted at a minimum of 12" (305mm) and a maximum of 30" (762mm) above adequate drains with sufficient side clearance for testing and maintenance. The installation shall be made so that no part of the unit can be submerged.