



SUBMERSIBLE BOOSTER

Approved for Drinking Water
AS/NZS 4020 ✓

2 YEAR WARRANTY

WATER SOURCE



Above Pump Level



Below Pump Level

APPLICATION



Household Water



Irrigation

- Includes float switch for **automatic operation and dry run protection**
- **Virtually silent submerged operation** that won't disturb your family or neighbours
- **Easy submerged installation – plug & pump**
Connect to the pipework, plug into a power outlet and you're ready to pump
- Suitable for submerged pumping from **water sources above or below ground level**




SB-AW with floating suction strainer and float switch

25 dB Max. **LOW NOISE**




PUMP CONTROL & PROTECTION FEATURES



FLOAT SWITCH

External float that turns your pump on or off based on the water level - this prevents dry-running.



THERMAL OVERLOAD PROTECTION

The single phase motor will stop automatically if it overheats and will restart once it cools down - protecting your motor from damage.




CURRENT OVERLOAD PROTECTION


The single phase motor will stop automatically if a current overload event occurs and will restart once normal current is restored - protecting your motor from damage.

FIND SPACE FOR YOUR PUMP (MINIMUM TANK DIMENSIONS & FREE SPACE)


SB-A with float switch

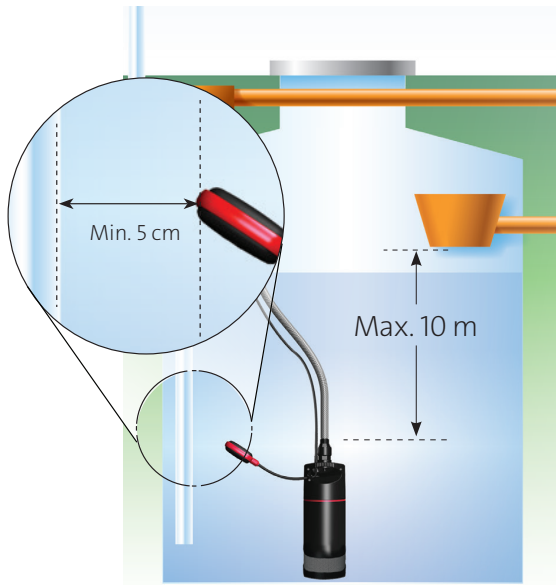


SB-AW with floating suction strainer and float switch

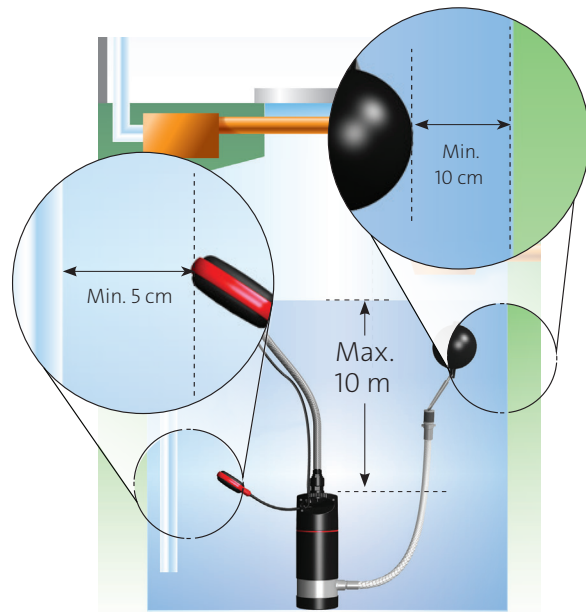

SB A

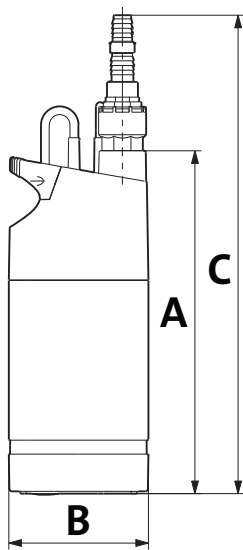

SB AW

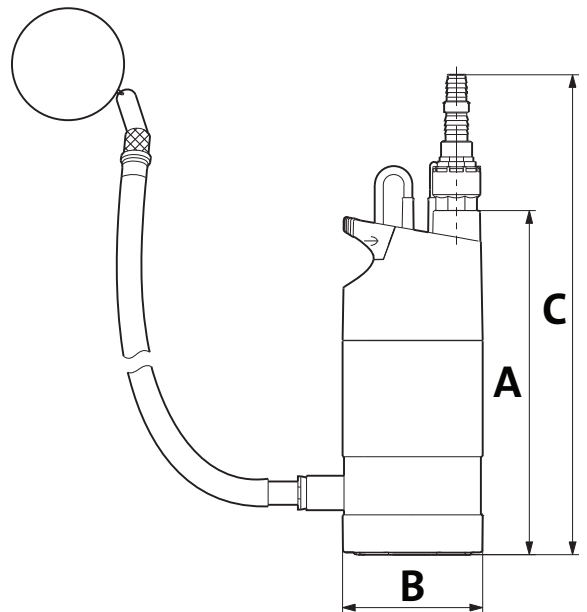

| Model | Connections | | Dimensions (mm) | | |
|------------|--------------------------|-----------------|-----------------|-------|------------|
| | Inlet | Outlet* | A (h) | B (w) | C (outlet) |
| SB 3-35 A | Stainless Steel Strainer | ¾" or 1" Female | 390 | 150 | 536 |
| SB 3-35 AW | Floating Strainer | | 528 | 150 | 621 |
| SB 3-45 A | Stainless Steel Strainer | | 415 | 150 | 584 |
| SB 3-45 AW | Floating Strainer | | 553 | 150 | 646 |

* Outlet adapter kit in box