


MOTOR SPECIFICATION

808557NTA-A11S CUSTOMER NO. Q.R. No. **CUSTOMER APAC** 240 **AOM 50 VOLTS** Hz Ph Duty MOTOR RPM. 840/3SP 2.4 **AMPS** RATING **370 WATTS** NOM. OUTPUT **CLOCK WISE AT DRIVE END ROTATION** CAPACITOR START μF/V RUN 12/440 μF/V **ENCLOSURE TOTALLY ENCLOSED CSR** INSULATION CLASS **B130** MOTOR TYPE **AUTO RESET OVERLOAD** THERMAL PROTECTION **FAN - SHAFT HORIZONTAL APPLICATION** BEARING D.E. 6202 DDU. LONG LIFE, LUBRICATION **WIDE RANGE** BEARING N.D.E. 6202 DDU. **FLEX 1500 ±30 GREY** SUPPLY LEAD **VIA SUPPLY LEAD EARTH PROVISION** BASIC BUILD 305-570-07 **SPECIFICATION** PAINT/ **PC GREY COLOUR PERFORMANCE** SP85191-01 **SPECIFICATION**

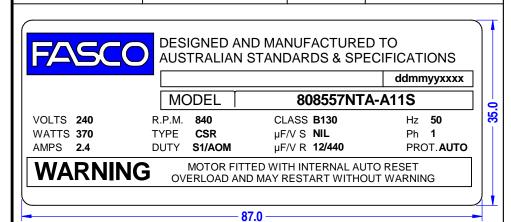

393-494-02


RATING

LABEL

SSTDAUTO.FMT

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)



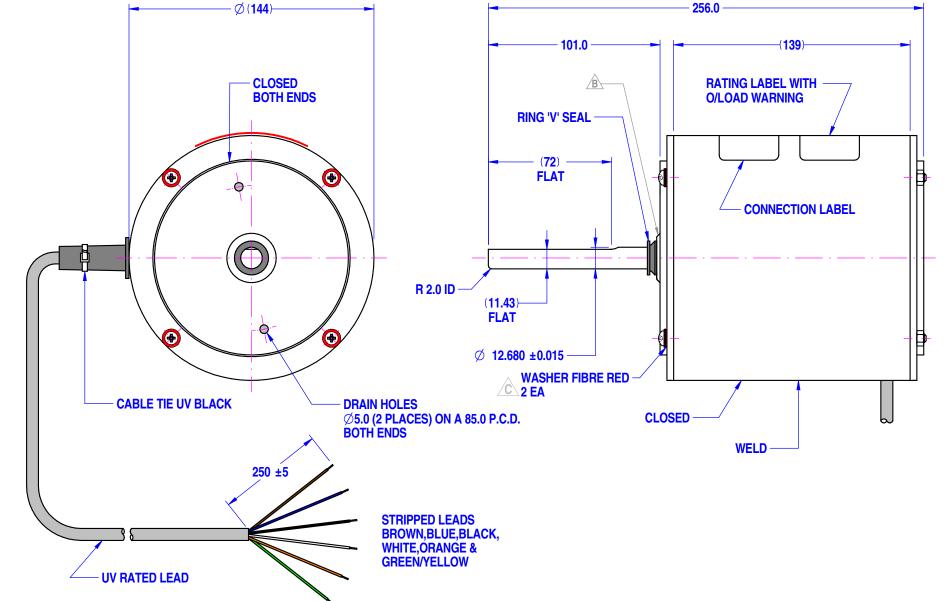

SPECIAL REQUIREMENTS:

CONNECTION

DIAGRAM

- 1) 'V' RING SEAL 374-003-01 FITTED ON SHAFT.
- 2) TIE RODS ASSEMBLED WITH RED FIBRE WASHERS P708271 DRIVE END ONLY
- 3) SEAL ENDS OF WELD WITH SELLEY'S BLOCKADE.
- 4) CABLE TIE ON CABLE ENTRY MUST BE UV BLACK
- 5) ENDSHIELDS MUST BE POWDER COATED
- 6) DRAIN HOLES PLUGS (2 OFF) PACKED IN PLASTIC BAG AND SUPPLIED LOOSE
- 7) MOTOR TO BE PACKED IN SINGLE CARTON.

UNLESS OTHERW	ISE SPECIFIED :	
DIMENSIONS ARE IN MM.		
TOLERANCES		
DECIMALS	ANGULAR	
.X ± 1.0	± 30'	

TOLERANCES			
DECIMALS .X ± 1.0	ANGULAR ± 30'	DRAWN	muntana
.XX ± 1.0	± 30	CHECKED	Pipat
THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS		RELEASED	Kanapote
		SCALE	١

MOTOR WEIGHT

10.1

N.T.S.

12/07/2006

06/11/2018

14/11/2018

29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,

BANGKRANG, MUANG NONTHABURI DISTRICT. NONTHABURI 11000 THAILAND

FRAME	
STATUS R	

A3

MOTOR B191:8557T-370-XAD:APAC

SHEET DWG. NO.

808557NTA-A11S

REVISION

D