

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with square full nozzle

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	W3G710-GG98-01	
Motor	M3G112-IA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1010
Power consumption	W	1200
Current draw	A	1.9
Max. back pressure	Pa	130
Max. back pressure	inH <sub>2</sub> O	0.52
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	40.4	34.4	09 Power consumption $P_{ed}$	kW	1.29
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	11125
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	157
04 Efficiency grade N		46	40	10 Speed (rpm) n	min <sup>-1</sup>	1005
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$ 

LU-156575



## Technical description

<b>Weight</b>	26.9 kg
<b>Fan size</b>	710 mm
<b>Rotor surface</b>	Painted black
<b>Terminal box material</b>	PP plastic
<b>Electronics housing material</b>	Die-cast aluminum, painted black
<b>Blade material</b>	Sheet aluminum insert, sprayed with PP plastic
<b>Fan housing material</b>	Sheet steel, galvanized and coated with black plastic (RAL 9005)
<b>Guard grille material</b>	Steel, coated with black plastic (RAL 9005)
<b>Number of blades</b>	5
<b>Blade pitch</b>	0°
<b>Airflow direction</b>	"V"
<b>Direction of rotation</b>	Counterclockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H2
<b>Ambient temperature note</b>	Occasional start-up between -40°C and -25°C is permissible. For continuous operation at temperatures below -25°C (e.g. refrigeration applications) we recommend our fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on bottom; rotor on top on request
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing; (sealed)
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- External 24 V input (parameter setting)</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- EEPROM write cycles: 100,000 maximum</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Temperature derating</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Via terminal box
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>Protection class</b>	I (with customer connection of protective earth)

W3G710-GG98-01

## EC axial fan - HyBlade

sickle-shaped blades (S series)

with square full nozzle

<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	CCC; UL 1004-7 + 60730; C22.2 No.77 + CAN/CSA-E60730-1; EAC
<b>Comment</b>	Conformity with EN 60335-1 in preparation




# EC axial fan - HyBlade

sickle-shaped blades (S series)

with square full nozzle

## Product drawing

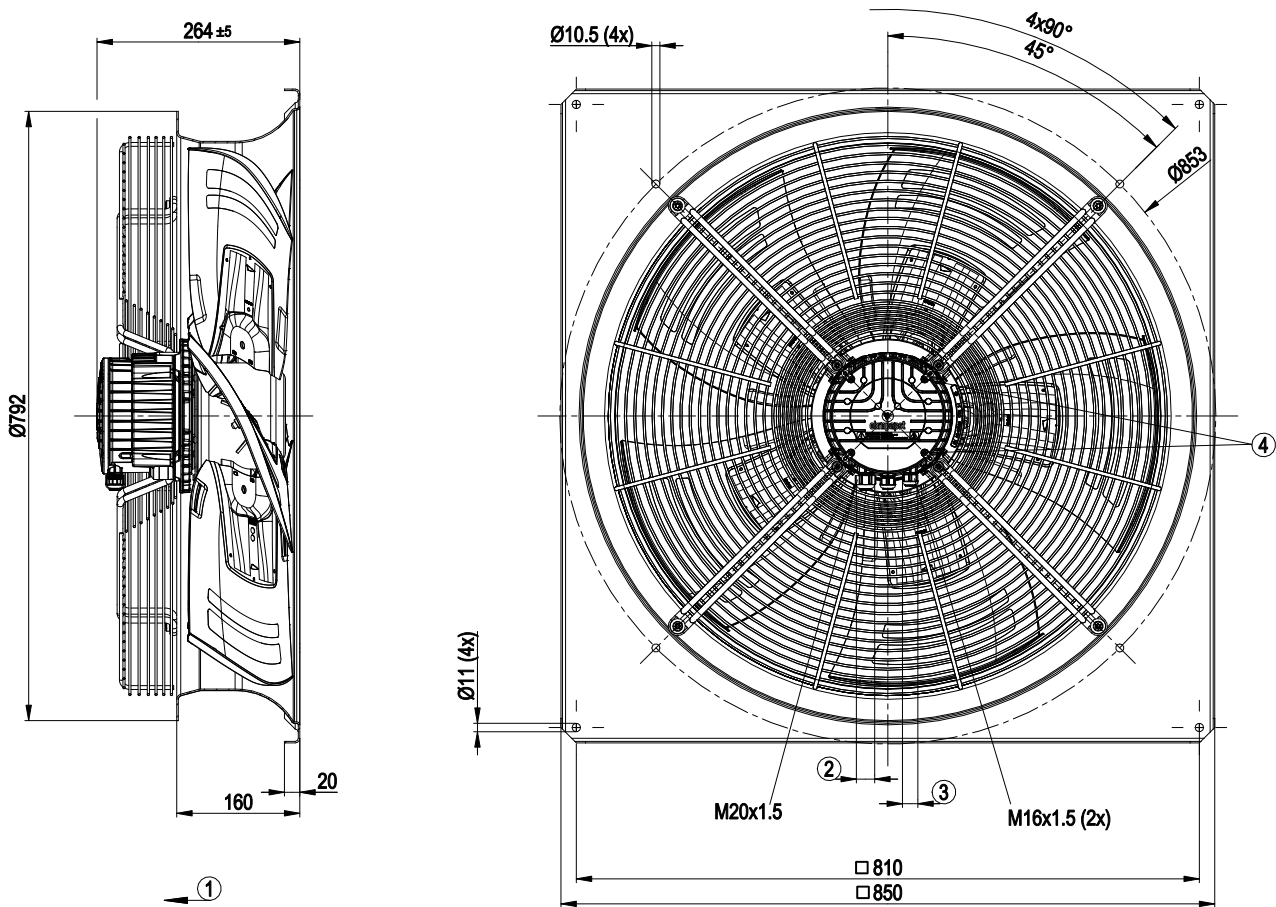


1	Direction of air flow "V"
2	Cable diameter min. 8 mm, max. 12 mm, tightening torque $2.5 \pm 0.4$ Nm
3	Cable diameter min. 6 mm, max. 10 mm, tightening torque $2.5 \pm 0.4$ Nm Cable diameter min. 4 mm, max. 7 mm, tightening torque $2.5 \pm 0.4$ Nm (included seal must be used)
4	Tightening torque $1.5 \pm 0.2$ Nm

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with square full nozzle

## Connection diagram

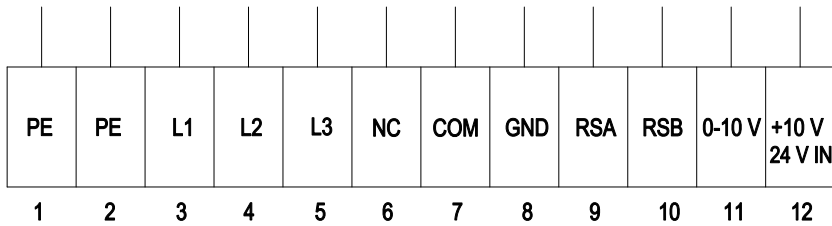


No.	Conn.	Designation	Function/assignment
1	PE	PE	Protective earth
2	PE	PE	Protective earth
3	L1	L1	Power supply
4	L2	L2	Power supply
5	L3	L3	Power supply
6	NC	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
7	COM	COM	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
8	GND	GND	Reference ground for control interface, SELV
9	RSA	RSA	RS485 interface for MODBUS, RSA; SELV
10	RSB	RSB	RS485 interface for MODBUS, RSB; SELV
11	0-10 V	0-10 V	Analog input (set value) SELV, 0-10 V, Ri = 100 kΩ, adjustable curve
12	+10 V	+10 V	Fixed voltage output 10 VDC, SELV, +10 V ±3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply

# EC axial fan - HyBlade

sickle-shaped blades (S series)

with square full nozzle

## Curves: Air performance 50 Hz

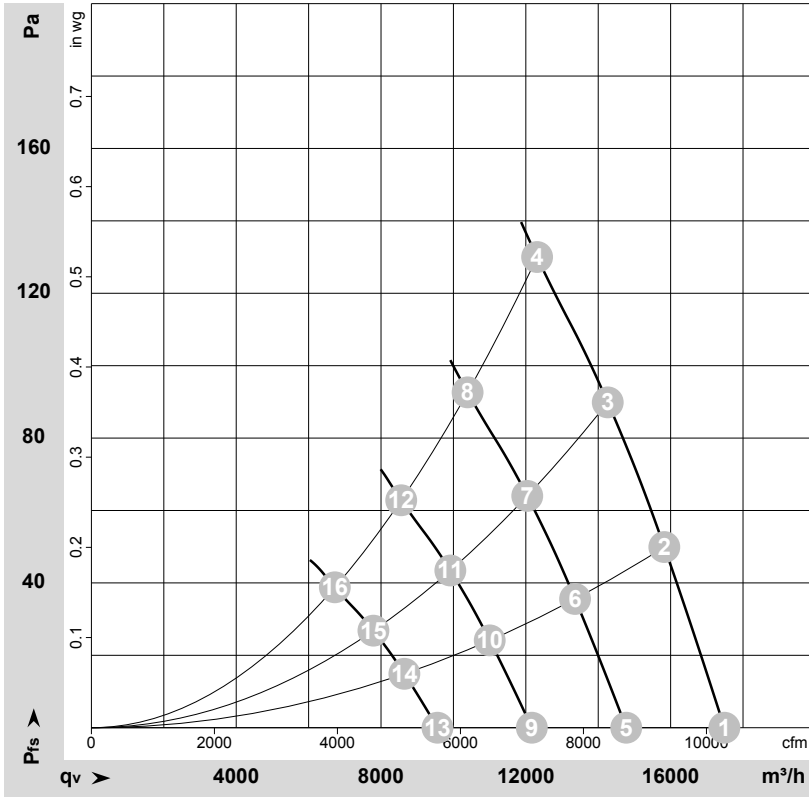

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-156575-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	400	50	1010	797	1.28	65	72	72	17485	0	10290	0.00
2	400	50	1010	962	1.53	64	71	71	15825	50	9315	0.20
3	400	50	1010	1083	1.72	65	72	72	14265	90	8395	0.36
4	400	50	1010	1200	1.90	73	79	79	12310	130	7245	0.52
5	400	50	850	481	0.77	61	67	67	14775	0	8695	0.00
6	400	50	850	579	0.92	60	66	67	13360	37	7865	0.15
7	400	50	850	652	1.03	61	68	68	12040	64	7085	0.26
8	400	50	850	722	1.14	69	75	75	10390	92	6115	0.37
9	400	50	700	269	0.43	56	62	62	12165	0	7160	0.00
10	400	50	700	323	0.52	55	62	62	11005	25	6475	0.10
11	400	50	700	364	0.58	56	63	63	9915	44	5835	0.18
12	400	50	700	403	0.64	64	70	70	8560	63	5035	0.25
13	400	50	550	130	0.21	50	56	56	9560	0	5625	0.00
14	400	50	550	157	0.25	49	55	56	8645	15	5090	0.06
15	400	50	550	177	0.28	50	57	57	7790	27	4585	0.11
16	400	50	550	196	0.31	58	64	64	6725	39	3960	0.16

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

