


FLOW

WALL BATH OUTLET CURVE LARGE

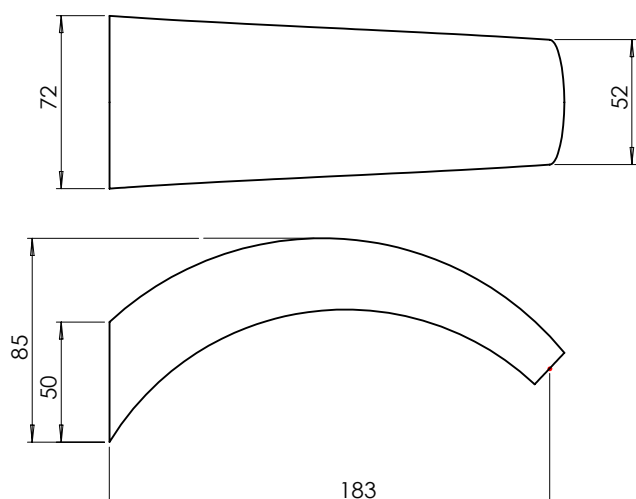

SPECIFICATIONS

Recommended Use	Domestic, hotel and commercial
Finish Available	Chrome
Suitable Hot Water	Storage Tank: Yes Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: Yes
Standards	AS/NZS 3718

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.



To see the complete FLOW range go to www.reece.com.au/bathrooms


FLOW

WALL BATH OUTLET CURVE LARGE

INSTALLATION INSTRUCTIONS

Important Note

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.




PHOENIX

www.phoenixtapware.com.au

SCREW ON WALL SPOUT


INSTALLATION INSTRUCTIONS

WATER SUPPLY REQUIREMENTS



150 KPa Min.
550 KPa Max.

Recommended Working
Pressure



75°

Maximum hot water
temperature

Note:


- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Failure to comply with the above may void all warranties.

Maintenance and Care

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not** use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


- Apply teflon tape to elbow thread.
- Screw Bath/Basin Spout onto elbow thread by hand and tighten firmly.

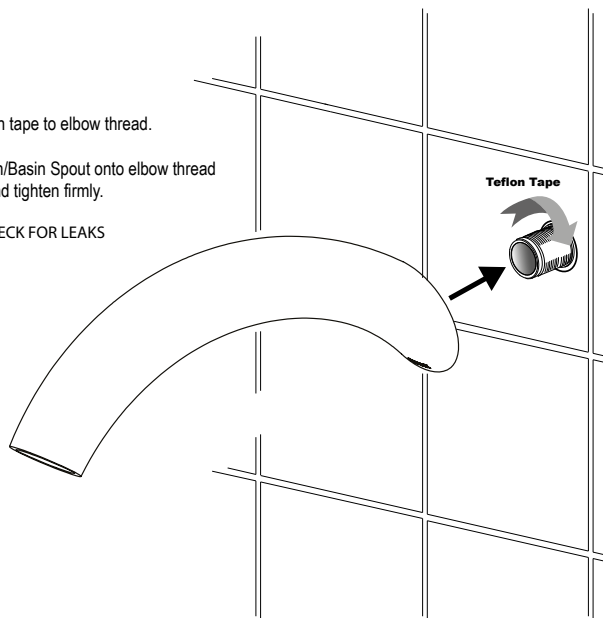

TEST & CHECK FOR LEAKS

IN0195 revA

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference



PHOENIX

