


Mizu Drift Bottle Trap with Removable Base Chrome

The Mizu Drift Bottle Trap with Removable Base can be connected to a 40mm plug & waste. The outlet connection of this Bottle Trap is designed to connect to 40mm DWV pipe and trap base can be removed for cleaning.

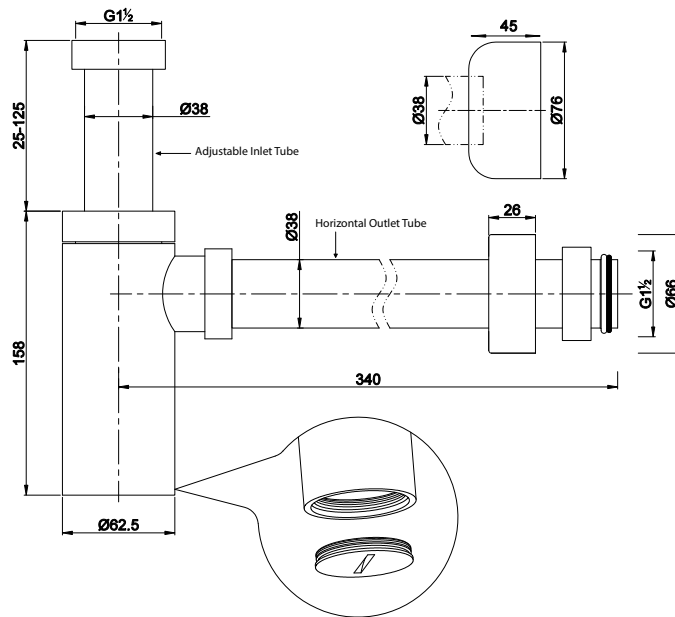

ASSEMBLY INSTRUCTIONS:

1. Apply o-ring silicone based lubricant to all seals.
2. Fit trap to plug and waste. Adjust trap height to allow for line up with waste connection at wall.
3. Measure horizontal outlet tube to the waste pipe and cut back as necessary. Use adjustable inlet tube to set height of bottle trap to achieve sufficient fall in outlet tube to drain.
4. Slide the Outlet Connection Cover Flange over the 40mm DWV pipe until it is flush against the wall.
5. Ensure bottom screwed removable plug is firmly tight.
6. Tighten all compression nuts and water test to ensure there are no leaks.

CLEANING RECOMMENDATIONS:

This product should not be cleaned with abrasive materials.
Damage caused by any improper treatment is not covered by the product warranty.
Refer to Warranty Conditions.

Please ensure a copy of the installation instructions is left with the end user for future reference.