

Zenna Stainless Steel Sinks

IMPORTANT NOTE:

Plumbing connections must be installed to the requirements of AS/NZS 3500 by a qualified plumber.

Prior to Installation:

Examine the sink for any visible defects or imperfections. Do not install if any defects are found.


If wall mounted tapware is to be used, consideration should be made to length of outlet and positioning of the sink on bench top. If tapware is to be bench mounted, allow suitable top width for fitting tapware.

Components Supplied:


Sink, cut-out template, basket waste and fixing clips.

Types of Installation:


Inset

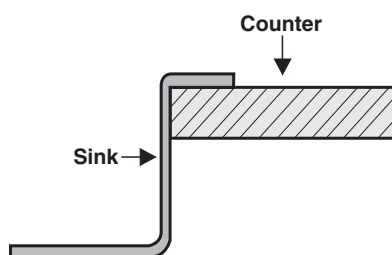

Undermount

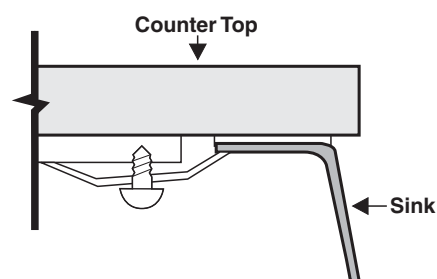

Both inset and undermount cut-out template is provided, please ensure the correct one is used for the appropriate installation method.

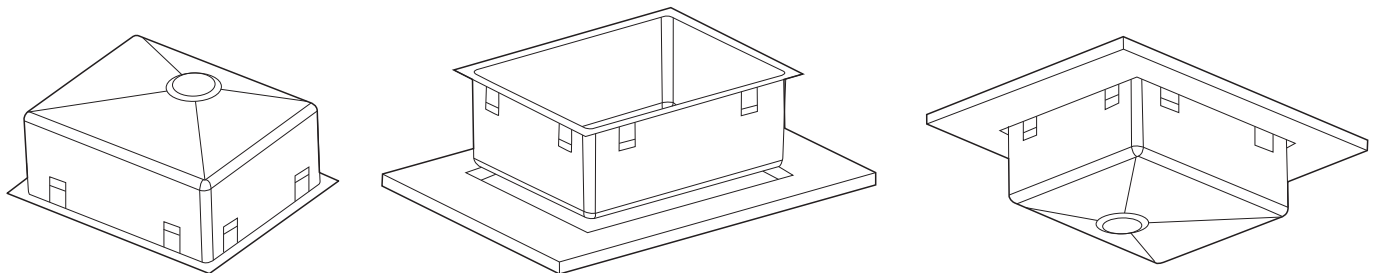


INSET INSTALLATION

1. Use template provided to trace and cut out the benchtop.
2. Position the sink into the bench top.
3. Install foam strip underside rim of the sink.
4. Hook the clips into the allocation positions on the sink.
5. Secure the sink by tightening the screw, ensure to use a low torque setting if tightening with a power tool.
6. Plumb up tapware and waste fittings.

Zenna Stainless Steel Sinks

UNDERMOUNT INSTALLATION:

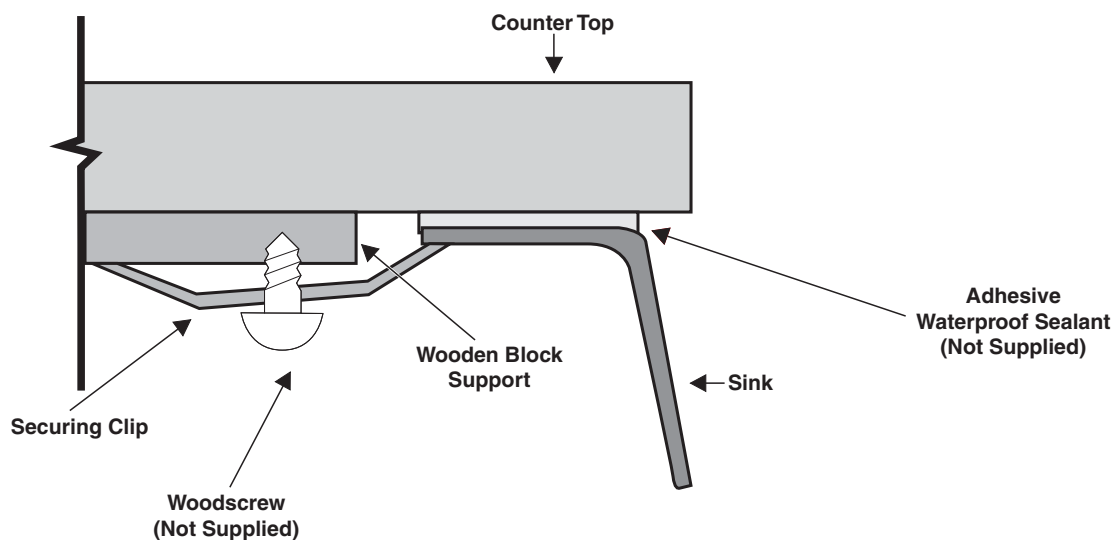

1. Use template provided to trace and cut out the benchtop and underlay.
2. Silicone both the underneath rim of the undermount bowl and around the underlay/timber lining cut out. Don't let the silicone dry before the sink is fitted to the benchtop.
3. Place Sink into position.
4. **Fixing Clips** - For stone and solid benchtops, ensure to affix wooden blocks to the underside of benchtops to screw fixing clips into. Mark out position of fixing clips and drill hole into support block for lock screws. Secure Sink into position by tightening the screw.
5. Remove excess silicone.
6. Plumb up tapware and waste fittings.

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.

