






Milli Pure Diverter

SPECIFICATIONS

| | |
|--|---|
| Recommended Use | Domestic, Commercial, Hotel |
| Colour Variations | Chrome, Matte Black, Brushed Nickel, Brushed Gunmetal |
| Texture Variations | Cirque, Diamond, Linear |
| Recommended Pressure Range | 300 - 500Kpa |
| Max Continuous Working Pressure | 500Kpa |
| Max Continuous Working Temperature | 65 deg. C |
| Suitable for Storage Tank Hot Water | Yes |
| Suitable for Continuous Flow Hot Water | Yes |
| Suitable for Gravity Feed Hot Water | No |

WARRANTY

| | |
|-------------------------|----------|
| Warranty - Domestic Use | 15 Years |
| Spare Parts | 5 Years |
| Labour | 1 Year |

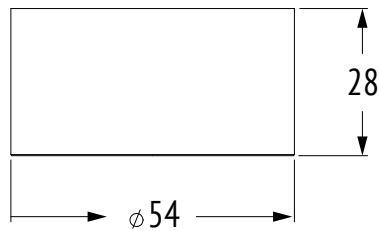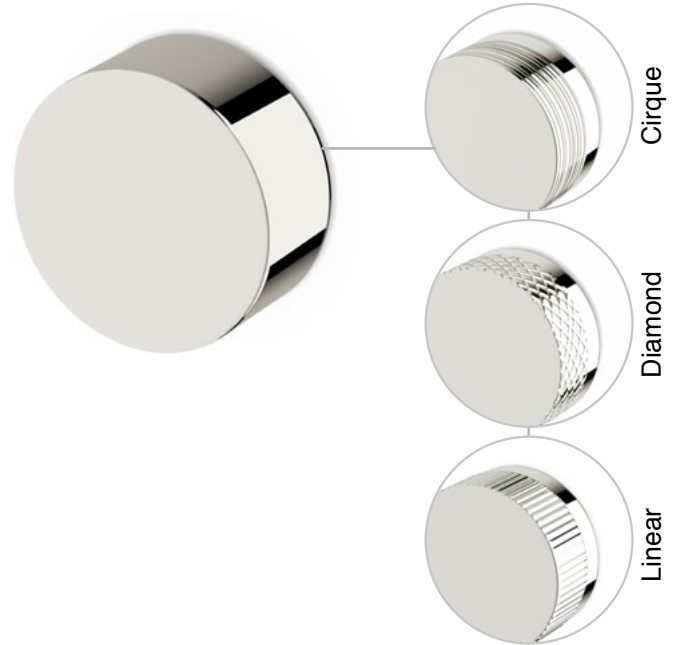

Dimensions are nominal measurements only.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Published 02/10/2019

To see the complete Milli range go to www.reece.com.au/bathrooms

