

CLOSE COUPLE TOILET

Installation Manual







Cygnet Hygiene Rim Over-height Square

Cygnet Hygiene Rim Square


Bottom Inlet




American Standard

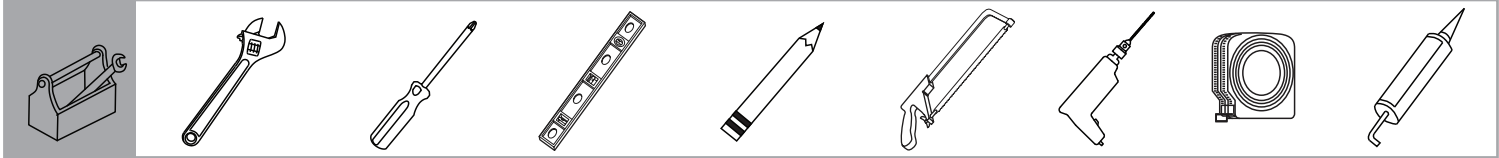


x1



x1




x1




x1



x1



x1



x1



x1

The more stars the more water efficient

WATER RATING
www.waterrating.gov.au

3.5 litres average flush
4.5 L per full flush / 3 L per half flush



In accordance with AS/NZS 6400

Licence No. 0050
LIXIL (Thailand) Public Company Limited



WaterMark
AS 1172.1
WMKA21024




Cygnets Hygiene Rim Over-height Square

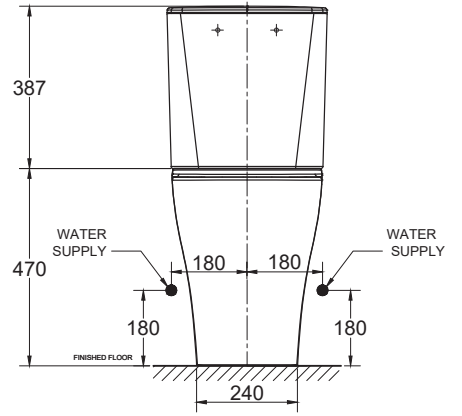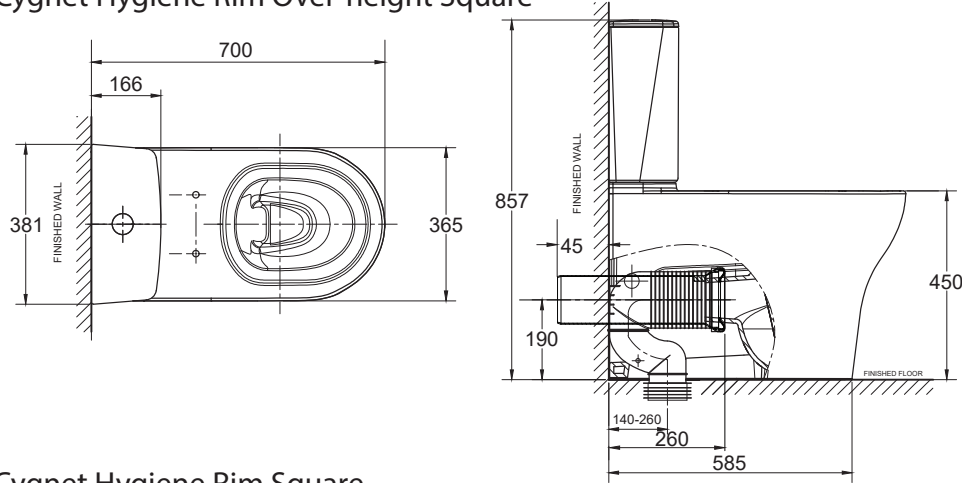



Cygnets Hygiene Rim Square

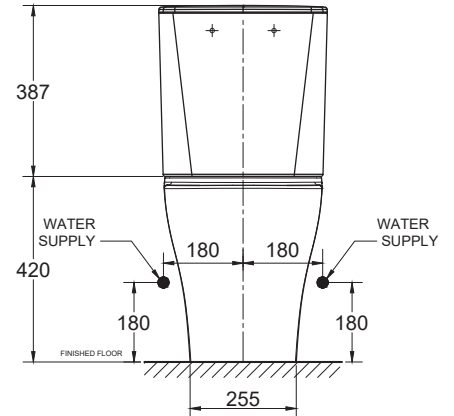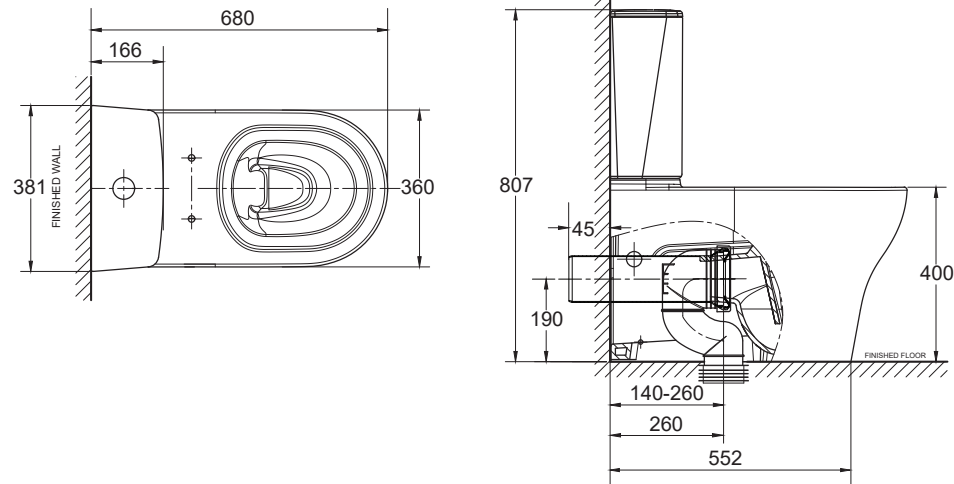



1

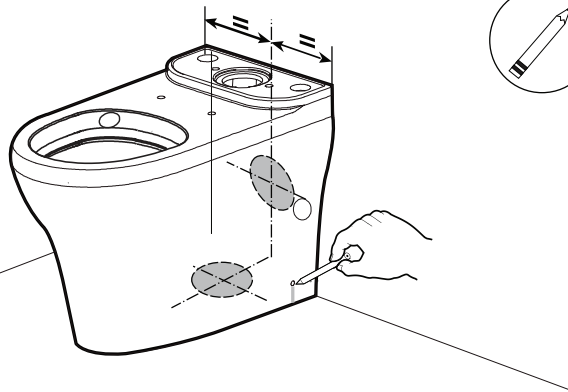


2

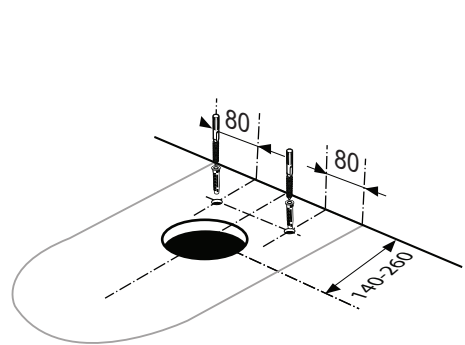

3

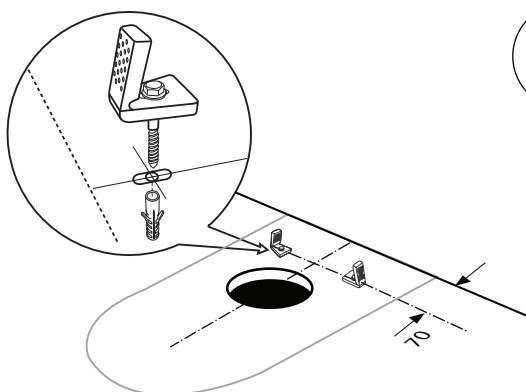


4

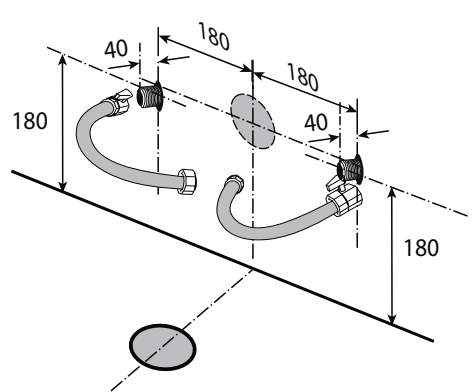




5a

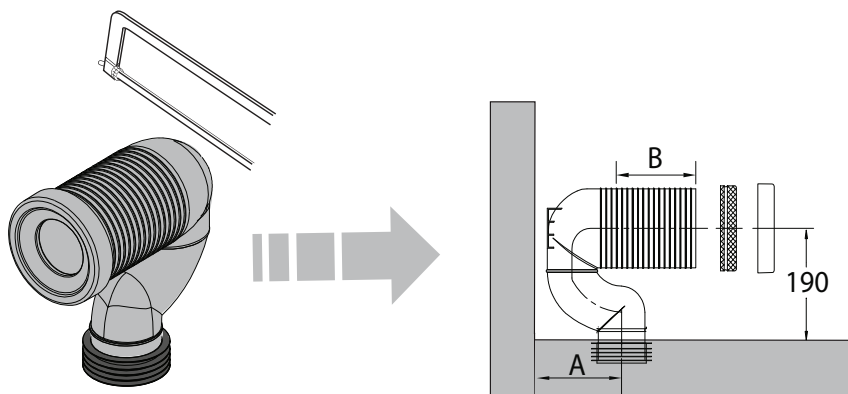


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)
140-149 mm.	10 mm.
150-159 mm.	20 mm.

5b

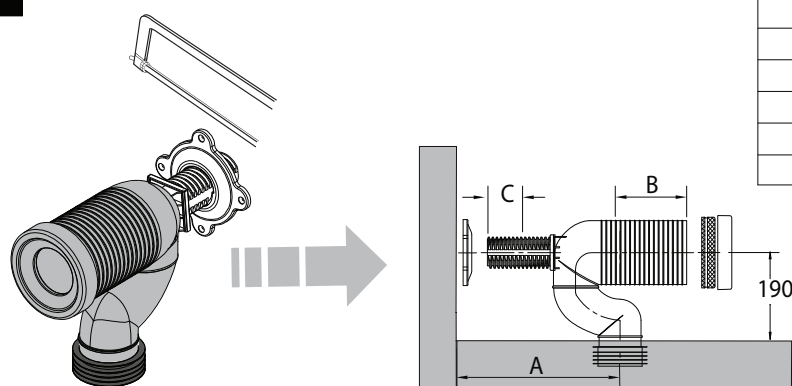


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING-IN (A)	CONNECTOR CUTOUT (B)
160-170 mm.	30 mm.	221-230 mm.	90 mm.
171-180 mm.	40 mm.	231-240 mm.	100 mm.
181-190 mm.	50 mm.	241-250 mm.	110 mm.
191-200 mm.	60 mm.	251-260 mm.	120 mm.
201-210 mm.	70 mm.	261-270 mm.	130 mm.
211-220 mm.	80 mm.	$C = 116 - (A - 160)$	


6a

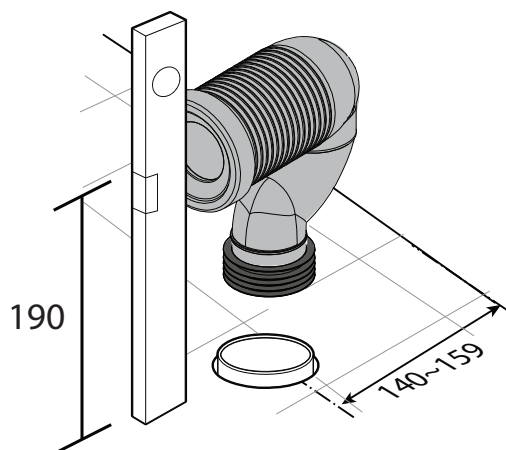


6b





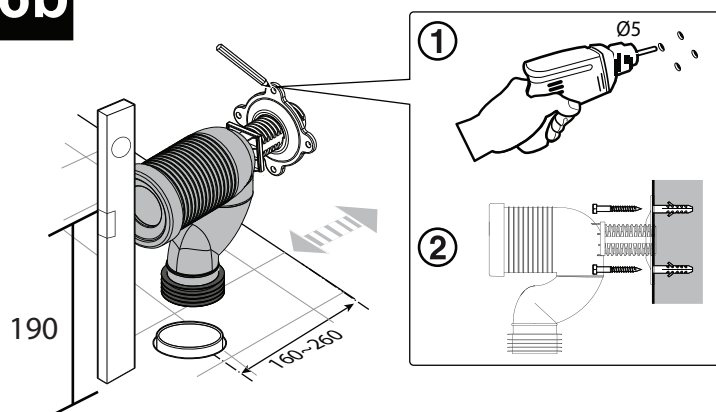


7

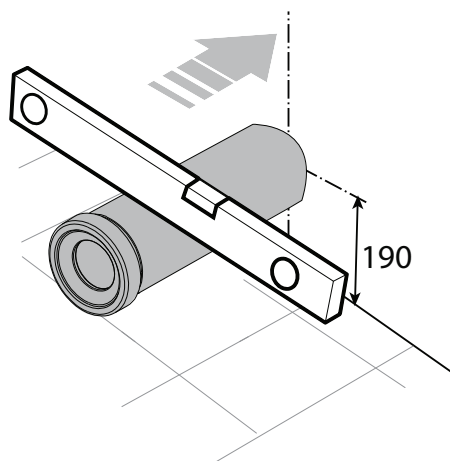

8

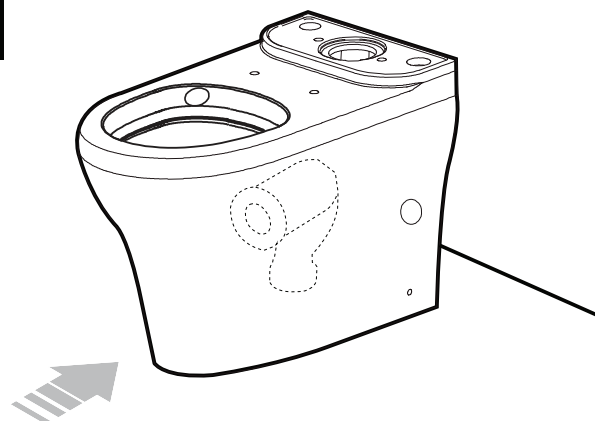

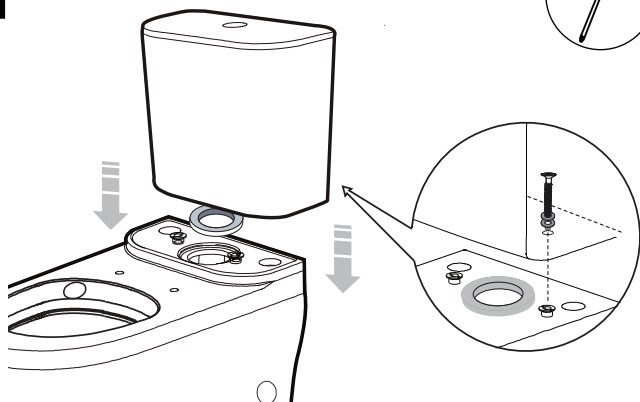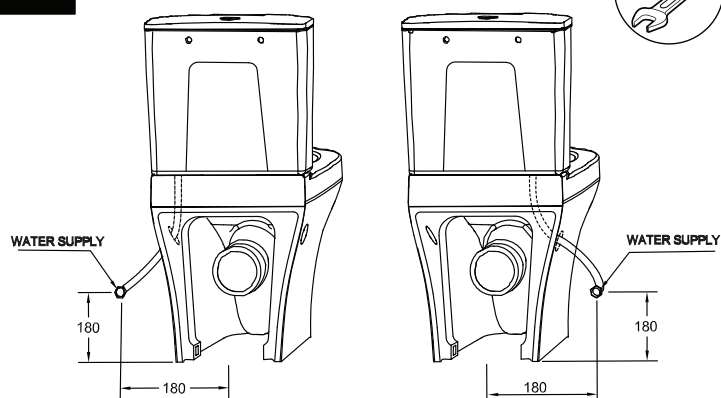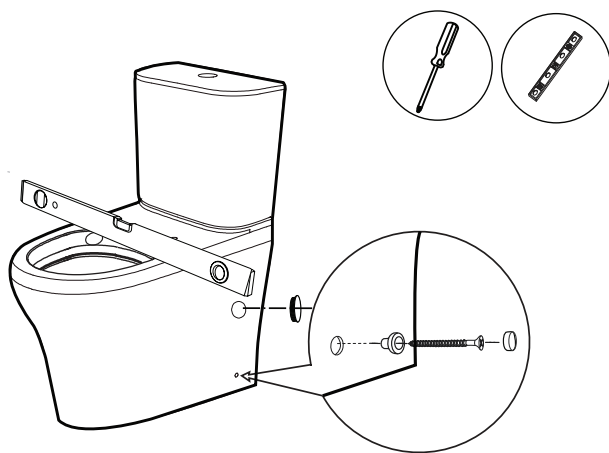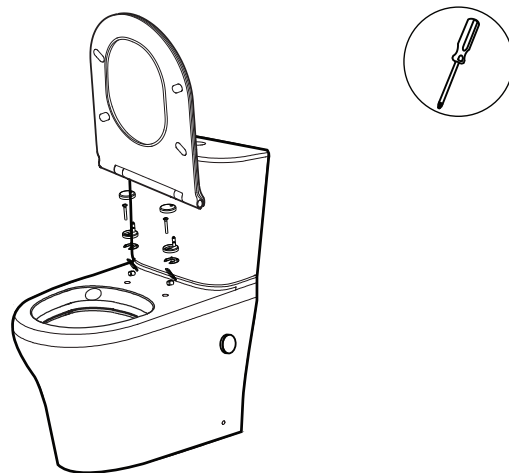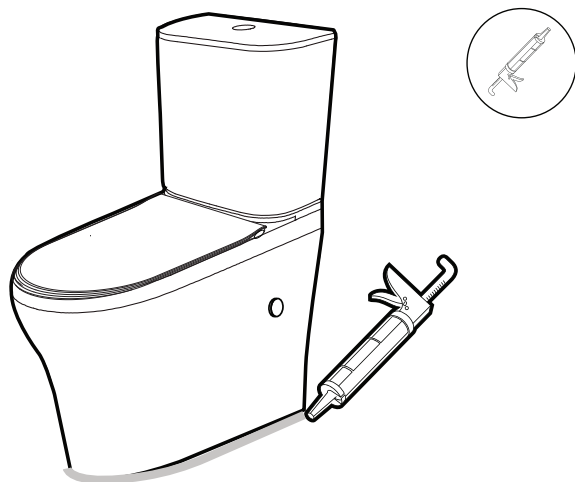**9****10****11****12****13****14**

IMPORTANT

Before turning on water supply check:

1. Cistern is installed properly
2. All moving components operate freely
3. All couplings are tightened correctly

Now fill cistern and recheck water level:

4. Check carefully for leaks
5. Test the cistern flushes