
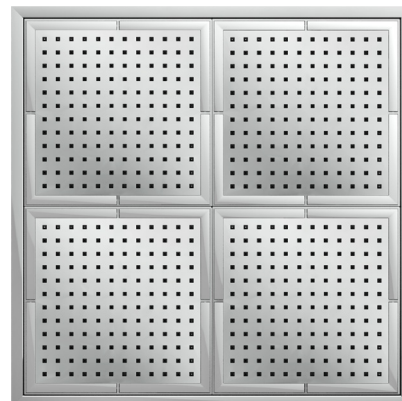
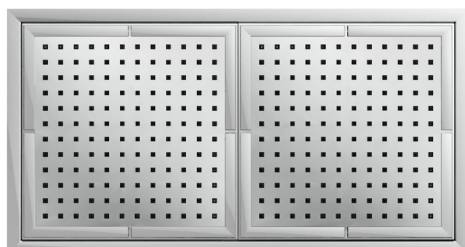


Nobili Plus Ceiling Showers



SPECIFICATIONS

Recommended use	Domestic, hotel and commercial
Colour availability	Chrome or Grey
Pressure rating	Suitable for high pressure applications and has been WELS certified to the following: Minimum operating pressure 150kPa Maximum operating pressure 500kPa
Temperature rating	Maximum hot temperature 60°C (recommended 42°C) Minimum temperature 1°C
Water Efficiency	Stars: 2 Flow rate: 10.5L/min Stars: 3 Flow rate: 9 L/min
Suitable Hot Water Units	Continuous flow: Yes Storage tank: Yes Gravity fed: Not recommended
Standards	AS/NZS 3662


CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.




This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.



Nobili Plus Ceiling Showers

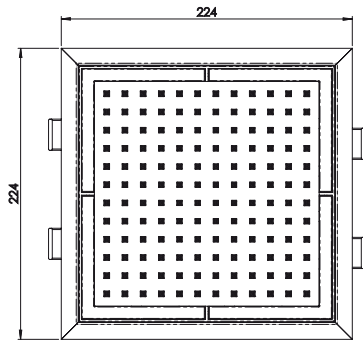


Nobili Plus Single Ceiling Shower (2 Star)

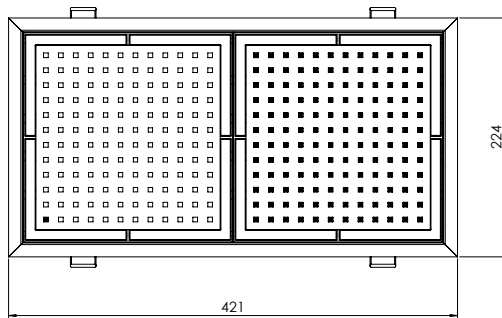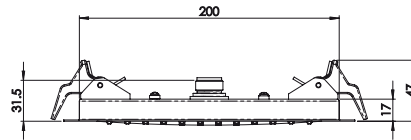

Nobili Plus Double Ceiling Shower (3 Star)

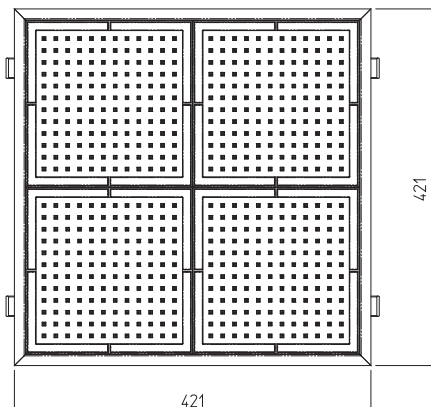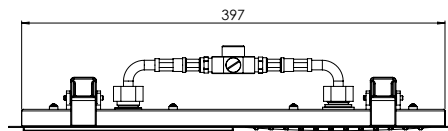

Nobili Plus Quad Ceiling Shower (2 Star)

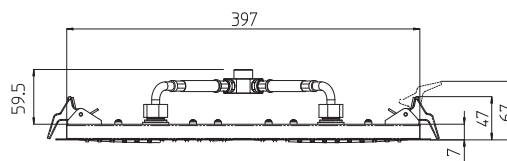

Dimensions are nominal measurements only.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference



Nobili Plus Ceiling Showers

INSTALLATION INSTRUCTIONS

