

NEW PRODUCT

RP 50 DIGITAL

Digital precision test pump for liquid-filled lines or containers up to 30 bar

Digital pressure sensor for measurements up to 30 bar

Creation of digital test protocols and visualizations of pressure curves

Additional pressure gauge with fine scaling 0.2 bar optional

Enables very precise readings up to a range of 16 bar (No. 61316)

Warp-resistant and lockable lever

Ergonomic handle also serves as carrying grip

Hook to fix the handle

Improved carrying comfort

TWIN VALVE-System


Two valves for double safety while testing the system

5 year warranty against corrosion

Extremely durable DURAMANT coating

Testing hose with steel mesh

Precise measurement

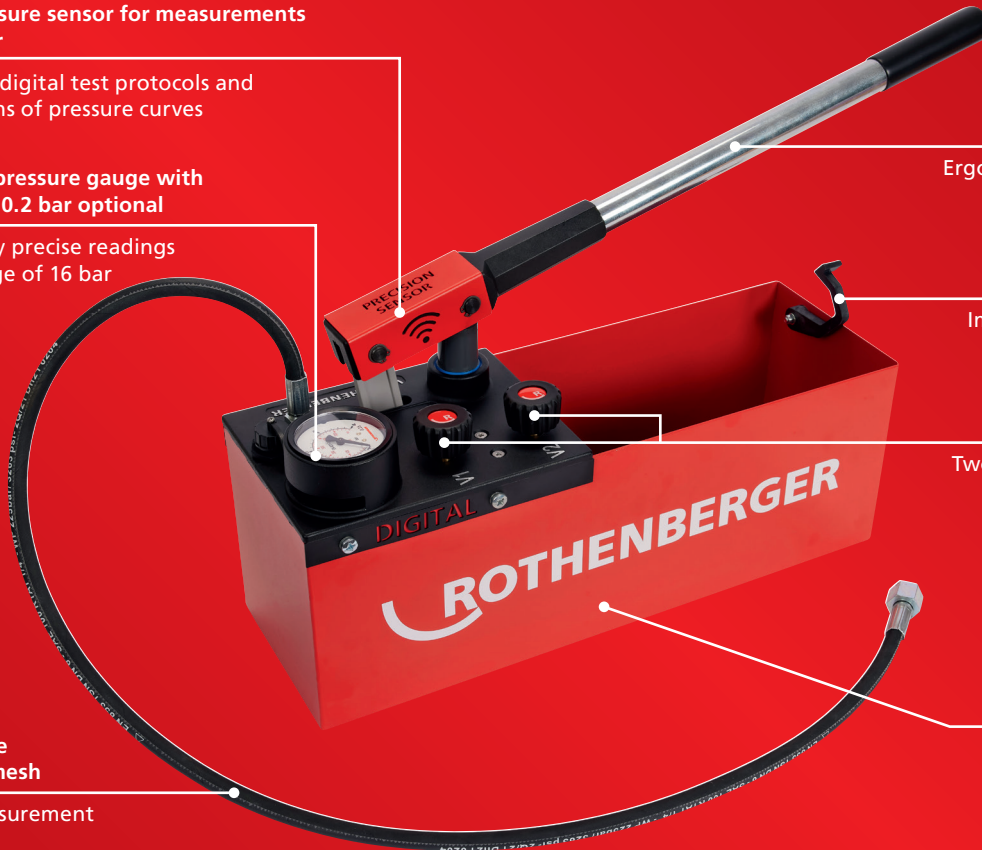

Digital pressure sensor enables precise adjustment of the test pressure



Wireless readout of the test data via Bluetooth®



Creation of a test protocol via app





Technical data

Testing and pressure range	0–30 bar	Pressure gauge units	bar, psi and Mpa
Hub suction capacity	approx. 45 ml/stroke	Suitable for	Water und glycol
Tank capacity	12l	Product dimension	495 × 165 × 255 mm
Connection	R 1/2"	Product weight	8,5 kg



RP 50 Digital

Model	kg	No.
RP 50 Digital	8.5	1000004000



Further test pumps

Model	kg	No.
Testing pump RP 50-S	8.0	60200
Testing pump RP 25	4.5	60250
Testing pump RP PRO III self-priming with power cable, high-pressure hose	16.0	61185



Accessories

Description	kg	No.
Maintenance package	0.1	60201
Double nipple 1/2" to 3/4"	0.1	60999
High pressure hose with 1/4" connection	0.49	R6112500
Extra 16 bar pressure gauge	0.1	61316