

CLOSE COUPLE TOILET

Installation Manual






Cygnet Hygiene Rim Over-height Round

Cygnet Hygiene Rim Round


Back Inlet




American Standard

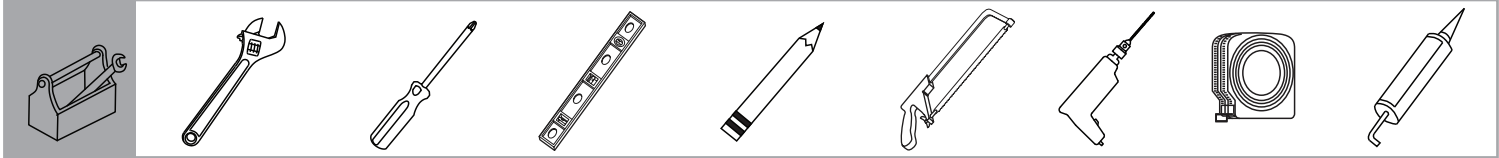


x1



x1




x1




x1



x1




x1



x1



x1



x1

The more stars the more water efficient

WATER RATING

www.waterrating.gov.au

3.5 litres average flush

4.5 L per full flush / 3 L per half flush

In accordance with AS/NZS 6400

Licence No. 0050

LIXIL (Thailand) Public Company Limited




WaterMark

AS 1172.1




WMKA21024




Cygnnet Hygiene Rim Over-height Round

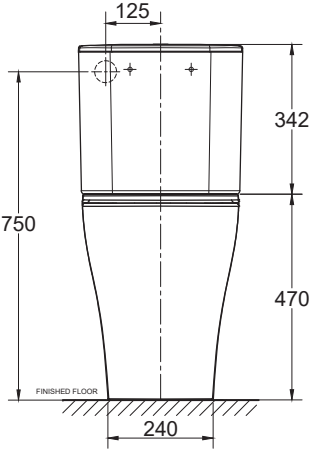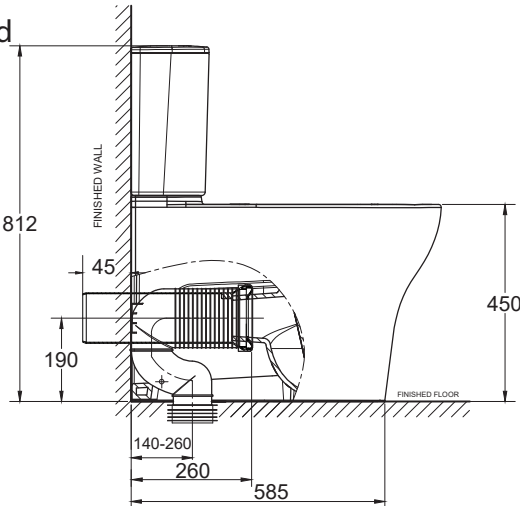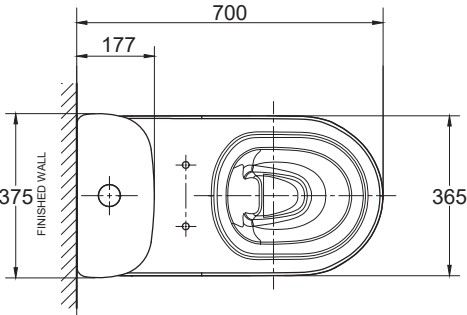


Cygnnet Hygiene Rim Round

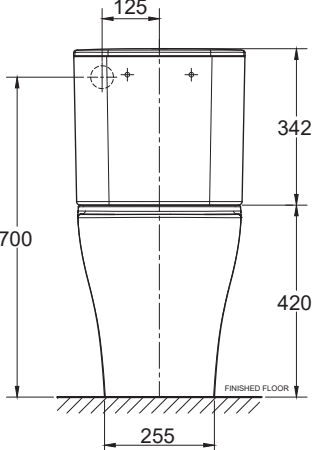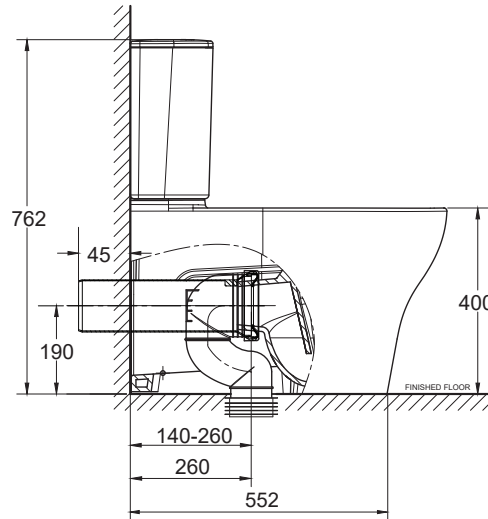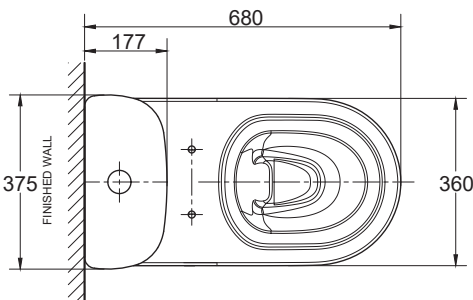


1

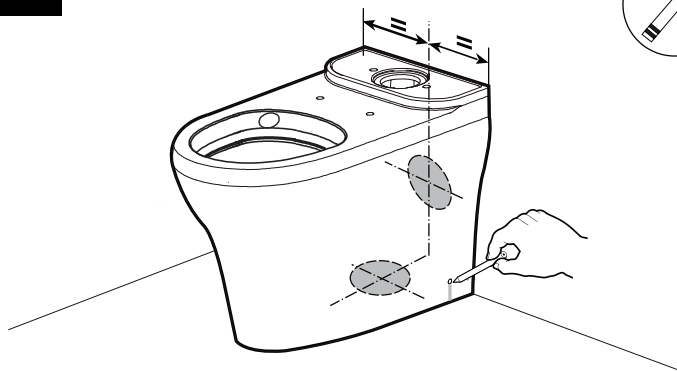

2

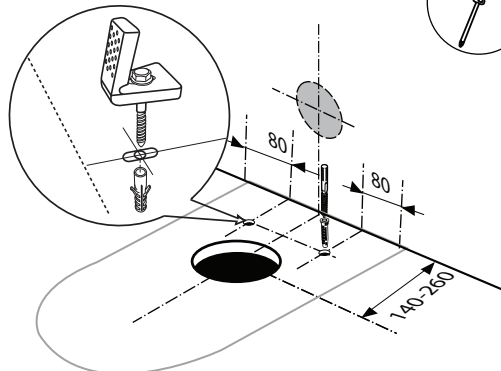


3

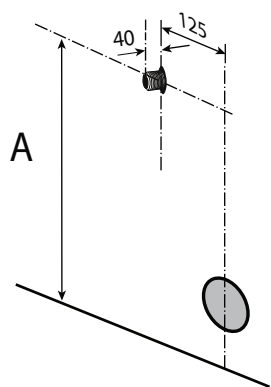

Model	Height (A)
Cygnnet Hygiene Rim Over-height Round	750 mm.
Cygnnet Hygiene Rim Round	700 mm.




4a

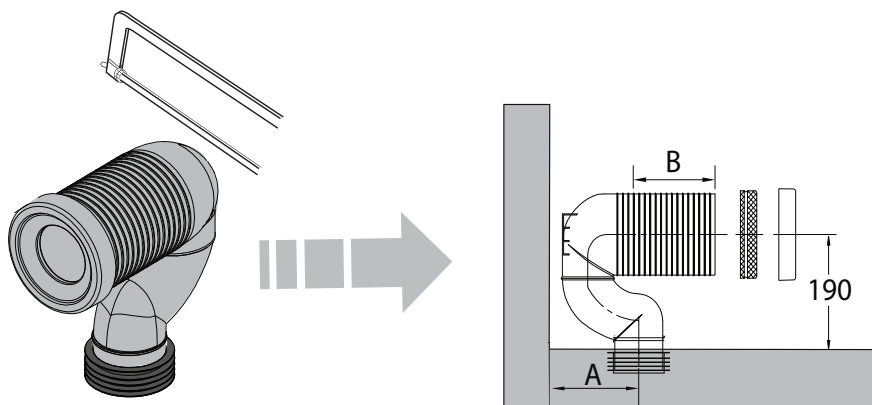


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)
140-149 mm.	10 mm.
150-159 mm.	20 mm.

4b

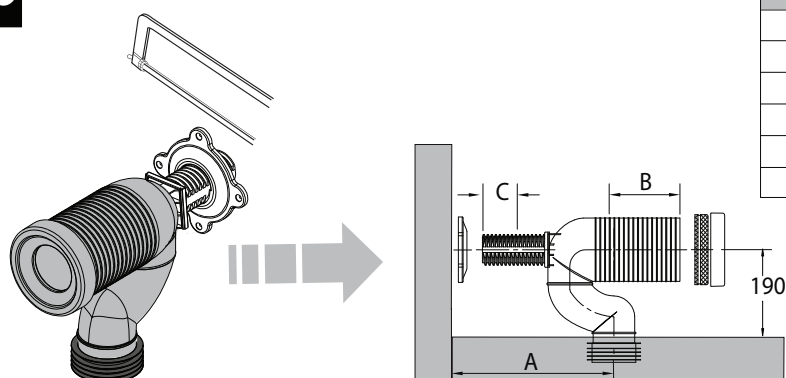


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING-IN (A)	CONNECTOR CUTOUT (B)
160-170 mm.	30 mm.	221-230 mm.	90 mm.
171-180 mm.	40 mm.	231-240 mm.	100 mm.
181-190 mm.	50 mm.	241-250 mm.	110 mm.
191-200 mm.	60 mm.	251-260 mm.	120 mm.
201-210 mm.	70 mm.	261-270 mm.	130 mm.
211-220 mm.	80 mm.	C= 116 - (A-160)	


5a

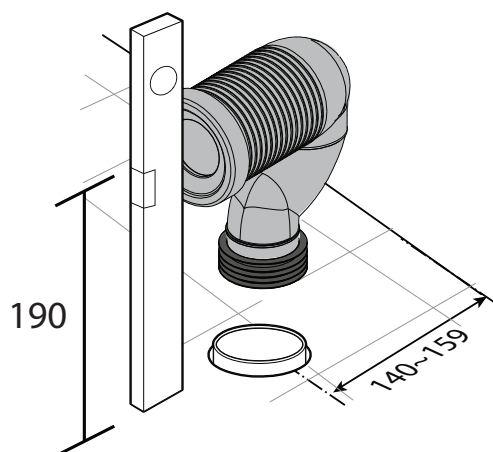


5b


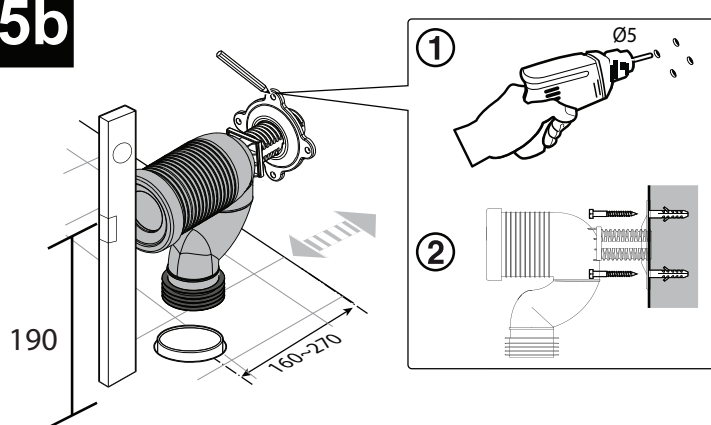


6



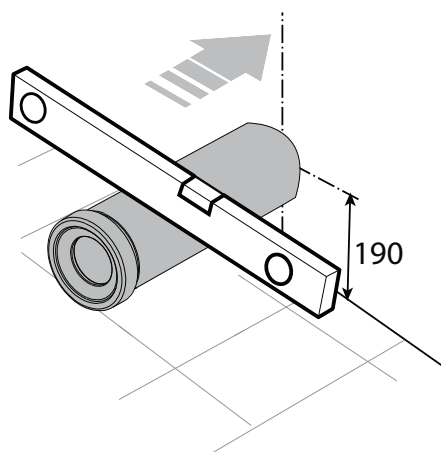


7

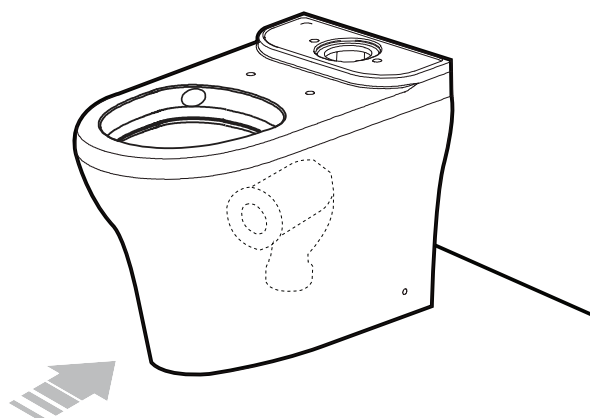

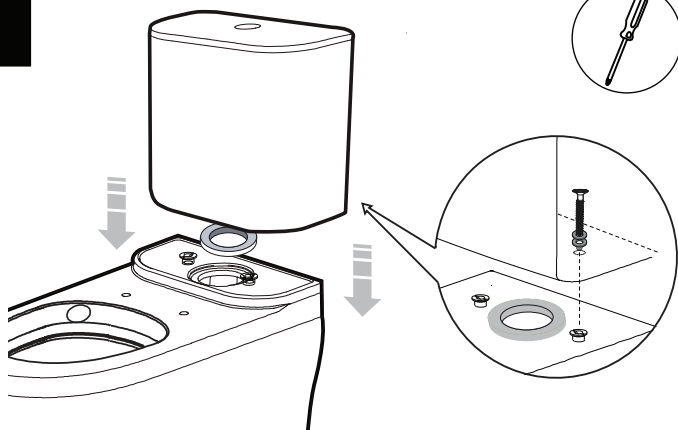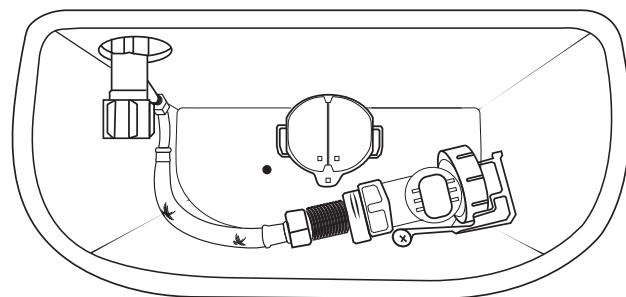**8****9**

The flexible hose in this cistern must not be submerged in water at any time.

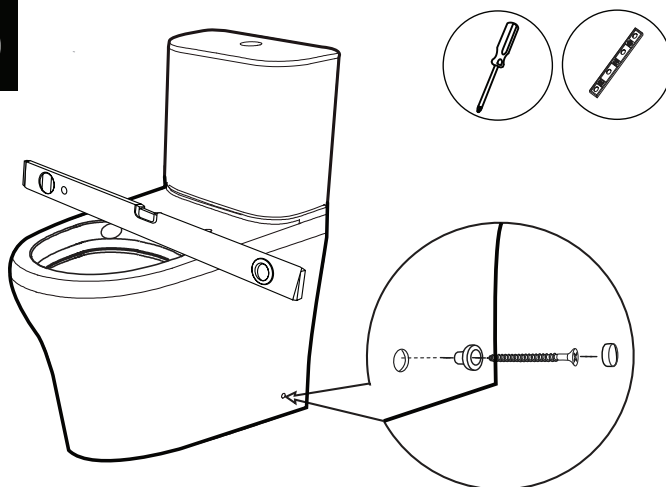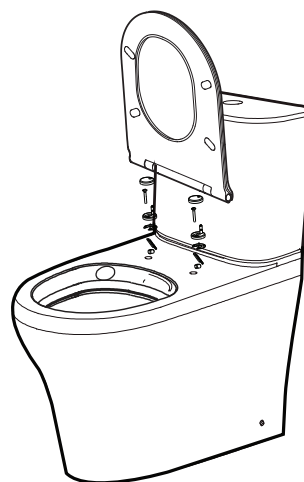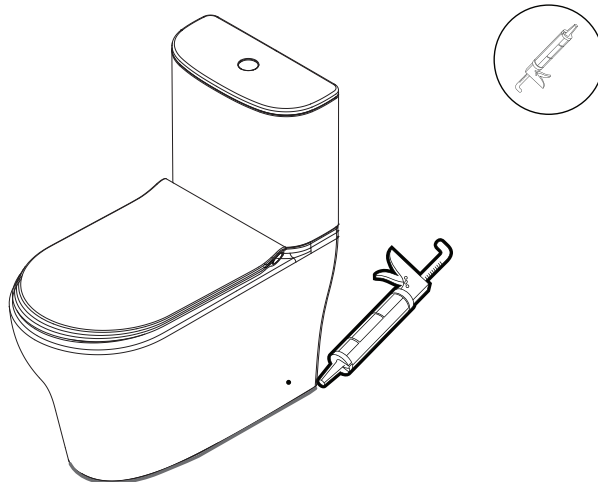10**11****12****13**

IMPORTANT

Before turning on water supply check:

1. Cistern is installed properly
2. All moving components operate freely
3. All couplings are tightened correctly

Now fill cistern and recheck water level:

4. Check carefully for leaks
5. Test the cistern flushes