



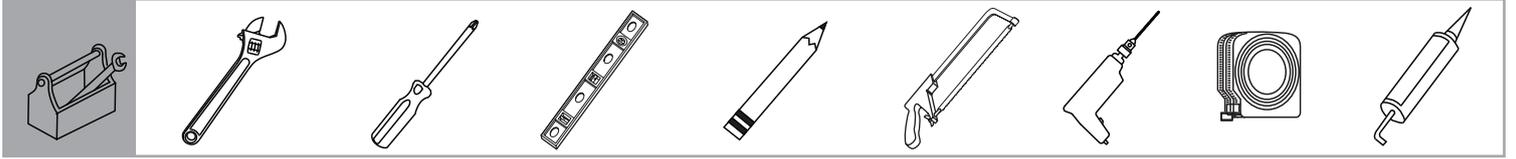



# CLOSE COUPLE TOILET

American Standard


## Cygnet Hygiene Rim SpaLet Installation Manual 3324 / 4325 Back Inlet



x1



x1



x1




x1




x1



x1



x1







x1










x1




x1

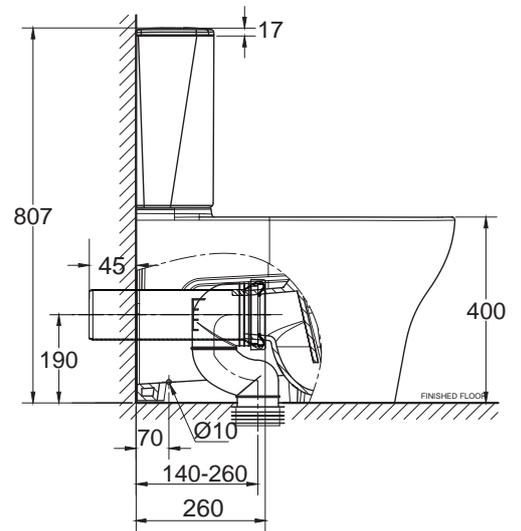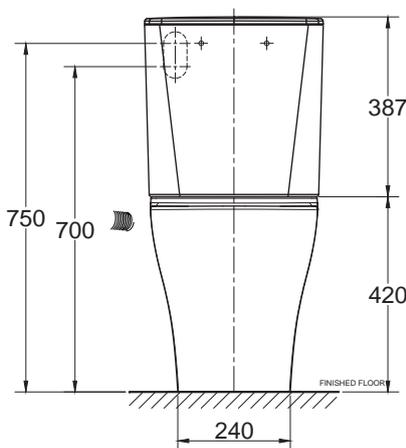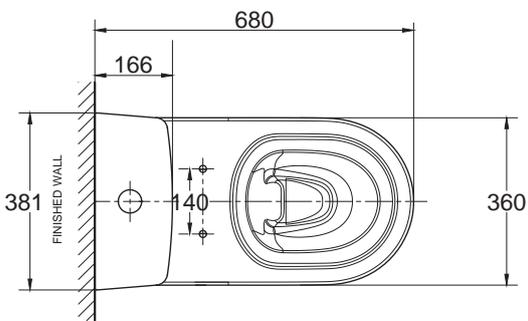

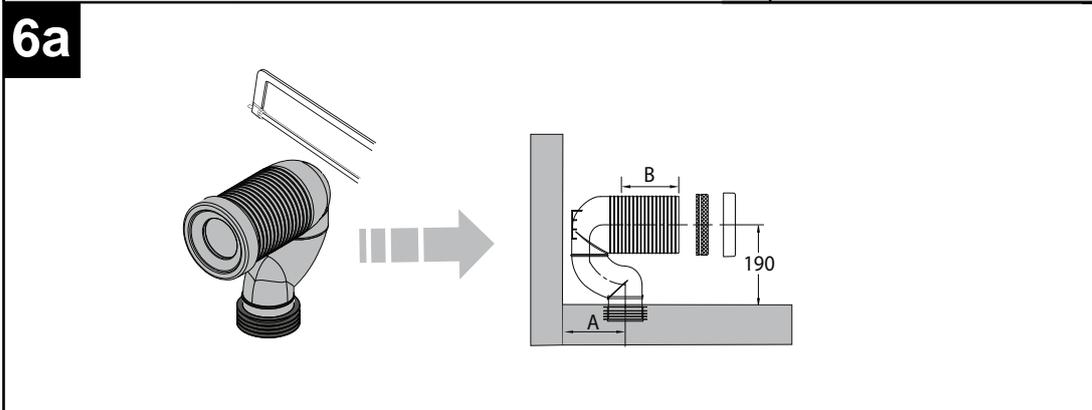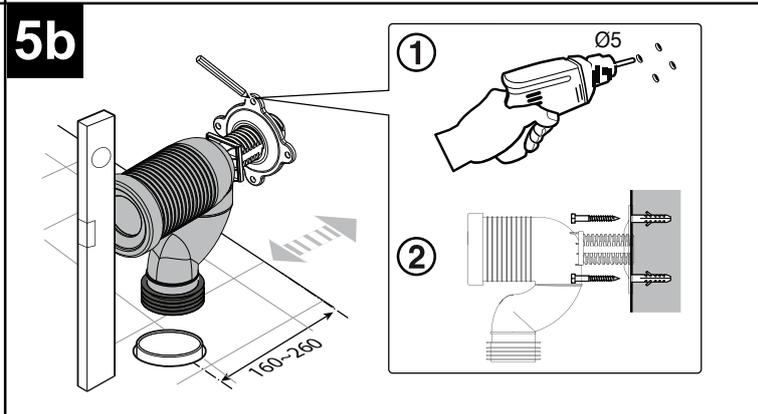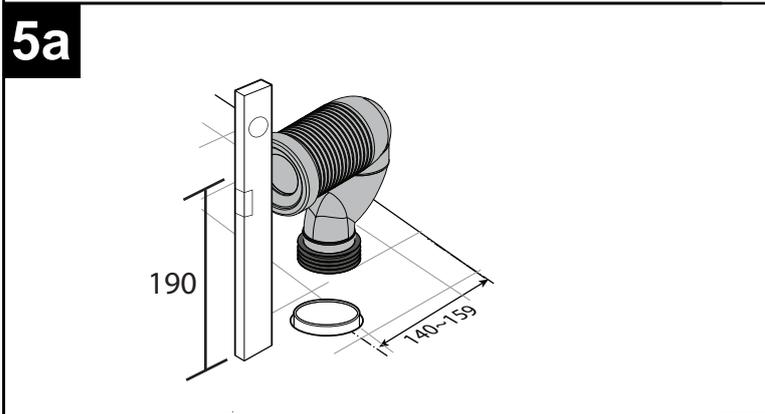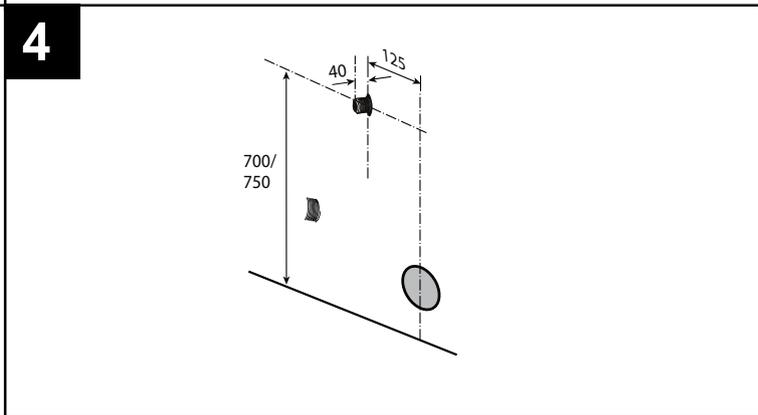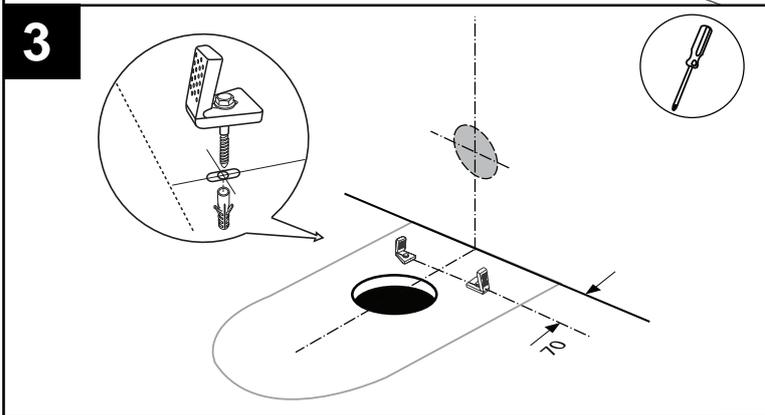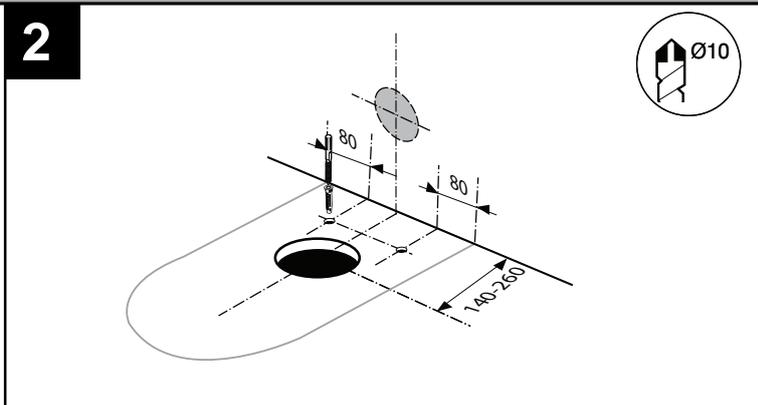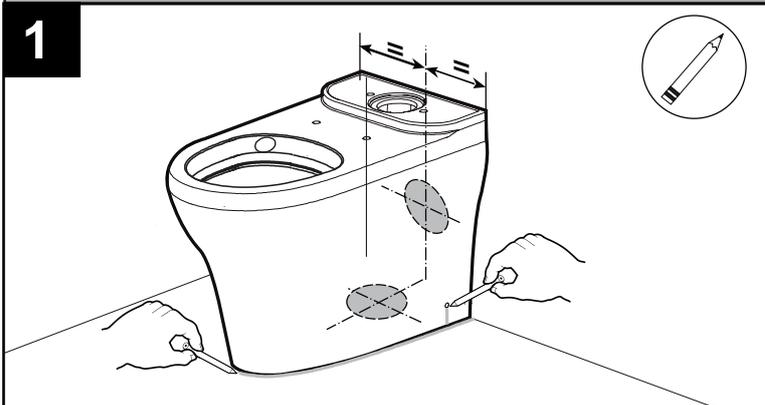


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)
140-150 mm.	10 mm.
151-159 mm.	20 mm.

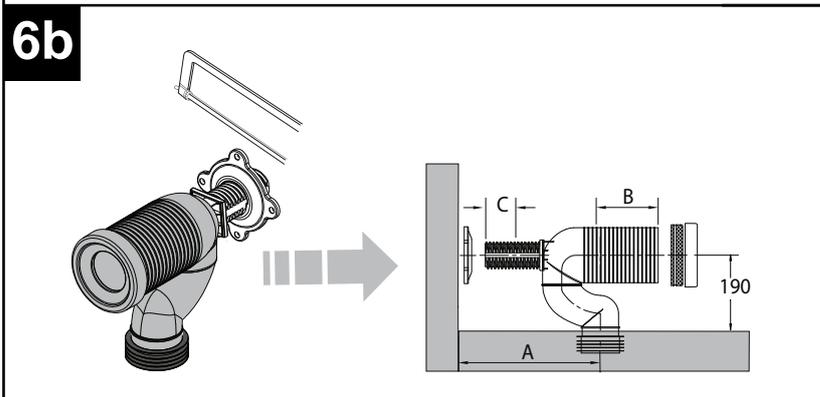


ROUGHING - IN (A)	CONNECTOR CUTOUT (B)	ROUGHING-IN (A)	CONNECTOR CUTOUT (B)
160-170 mm.	30 mm.	211-220 mm.	80 mm.
171-180 mm.	40 mm.	221-230 mm.	90 mm.
181-190 mm.	50 mm.	?	?
191-200 mm.	60 mm.	261-270 mm.	130 mm.
201-210 mm.	70 mm.	C=116 - (A-160)	




7

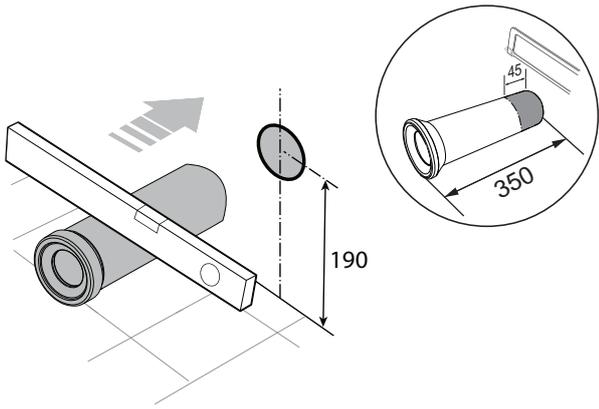


8

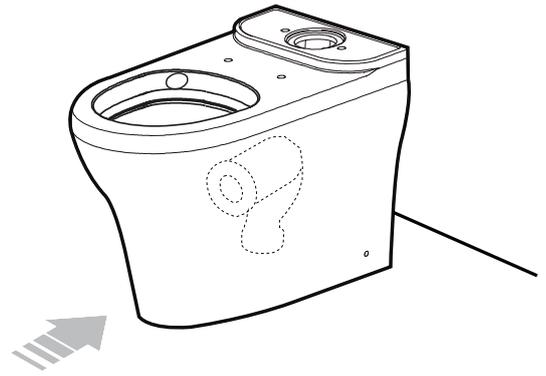


9

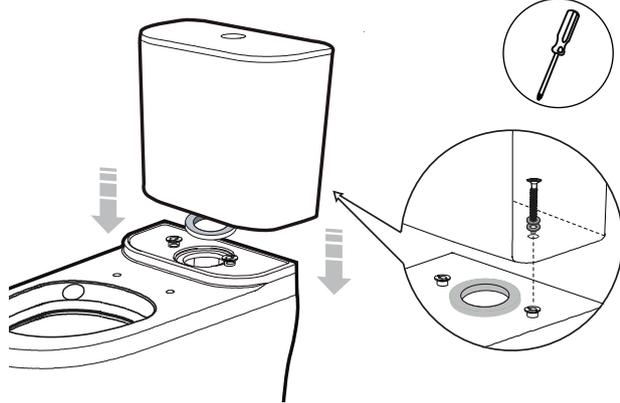


10

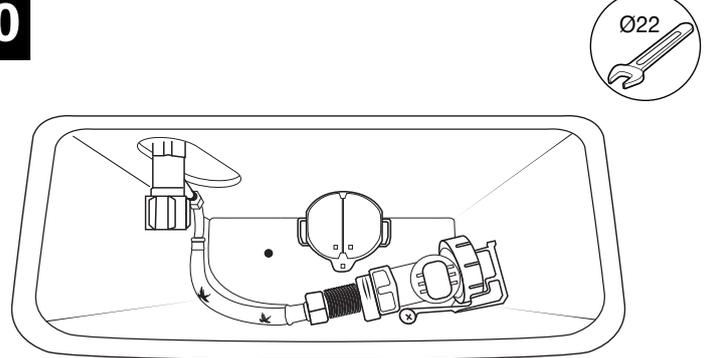

11

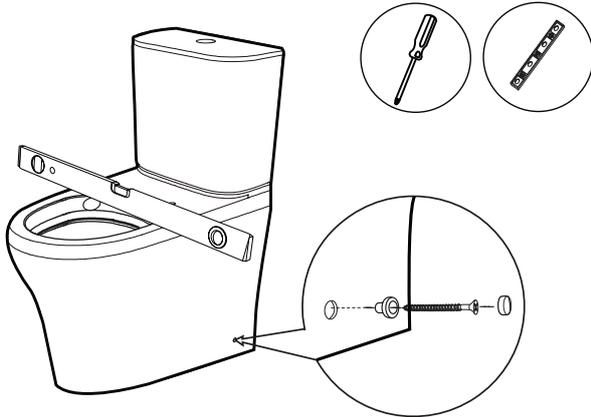


12

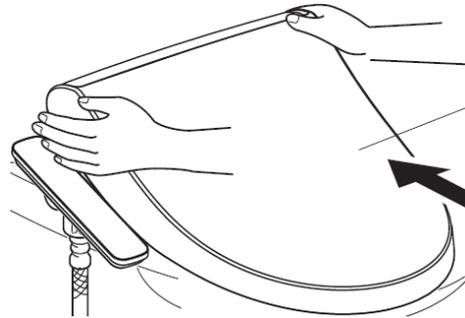

\*Refer to full SpaLet installation instructions provided in seat box

13

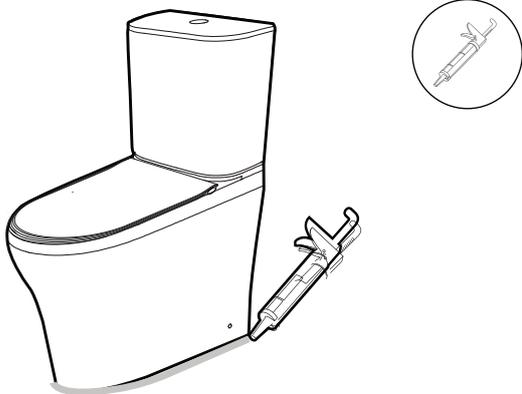

14

### IMPORTANT

#### Before turning on water supply check:

1. Cistern is installed properly
2. All moving components operate freely
3. All couplings are tightened correctly

#### Now fill cistern and recheck water level:

4. Check carefully for leaks
5. Test the cistern flushes