



INSTALLATION


Please note: For height of measurements between bottom of flush pipe and pan, refer to your pan specifications. **Important:** the front face of the pan bracket should be flush with the front face of the studs. Bracket is suitable for use on non compressible wall materials only. Installer must ensure that the fram is fixed appropriately to structure to be able to support 400kg on the pan.

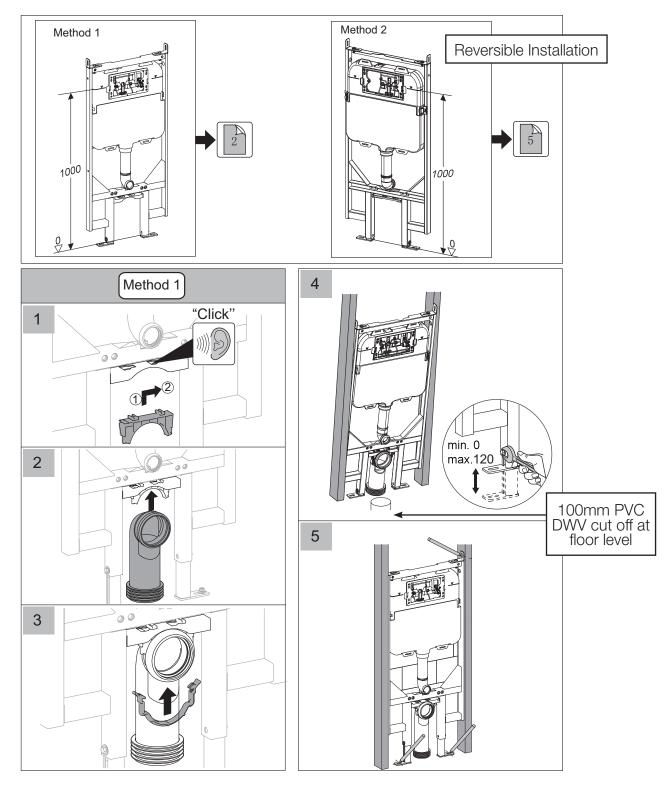


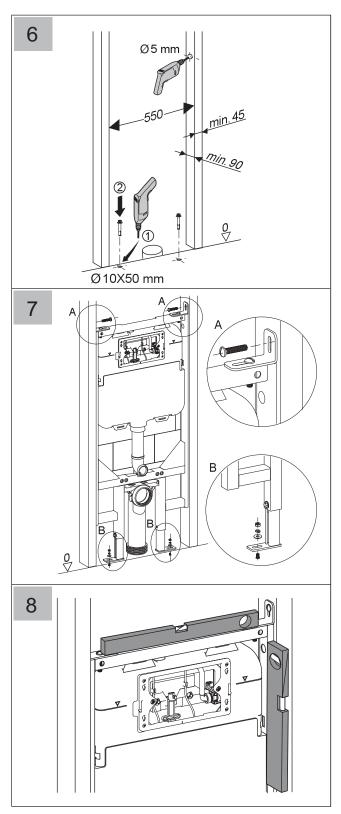

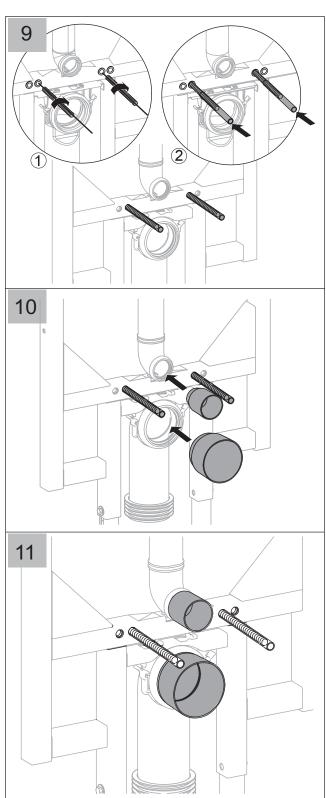





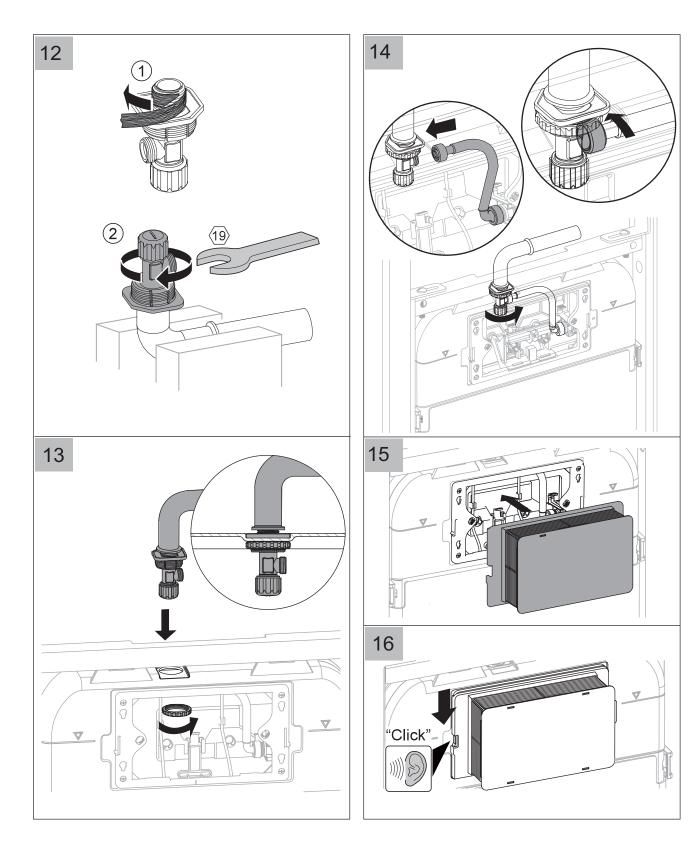


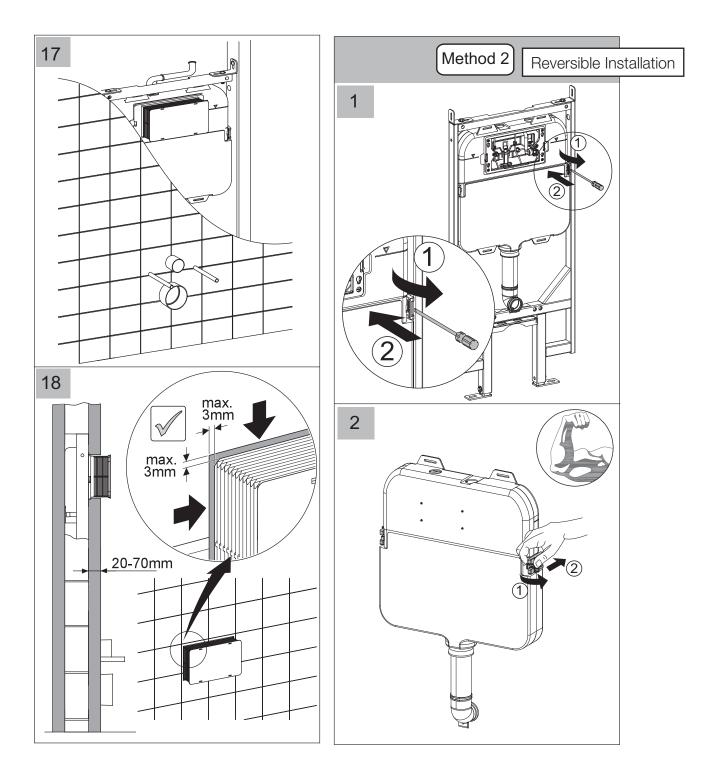



Important: the front face of the pan bracket should be flush with the front face of the studs. Bracket is suitable for use on non compressible wall materials only. Installer must ensure that the fram is fixed appropriately to structure to be able to support 400kg on the pan.




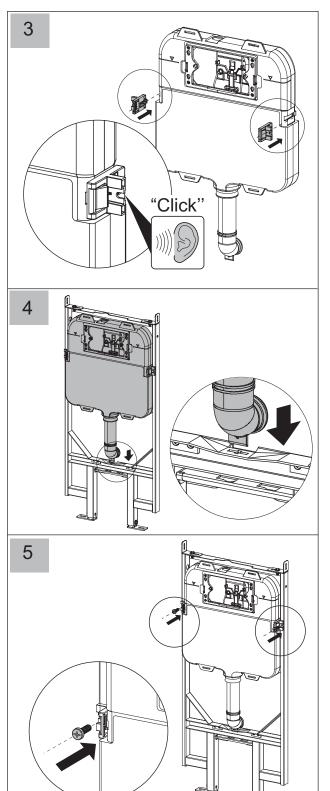


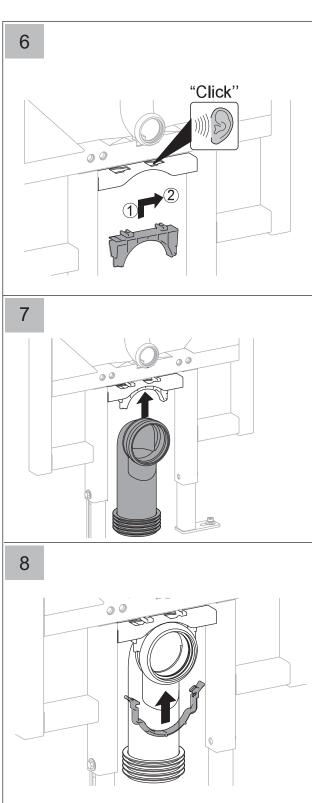


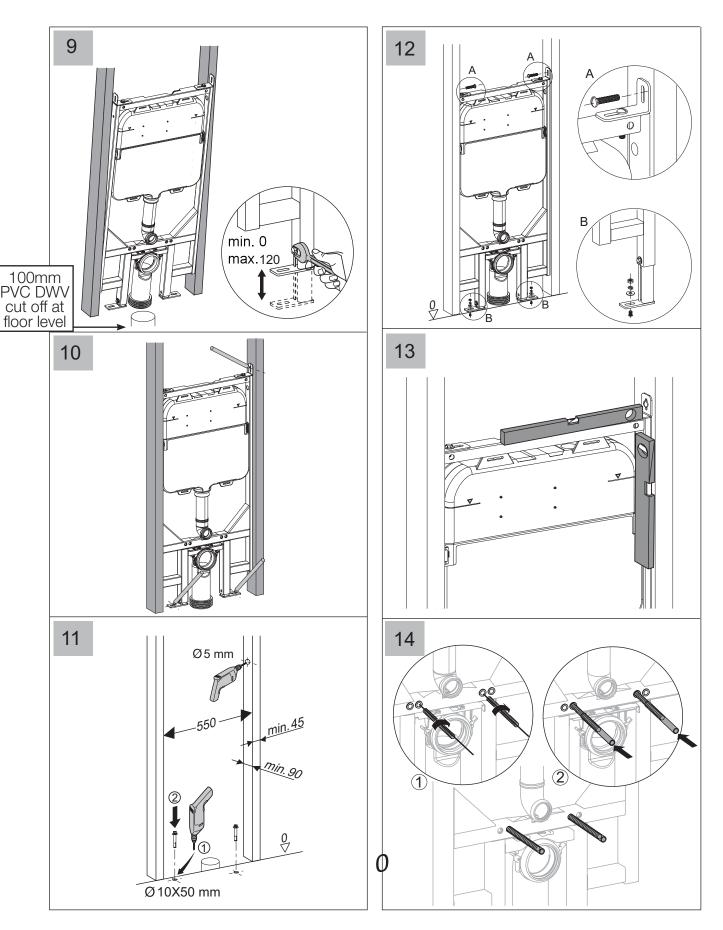






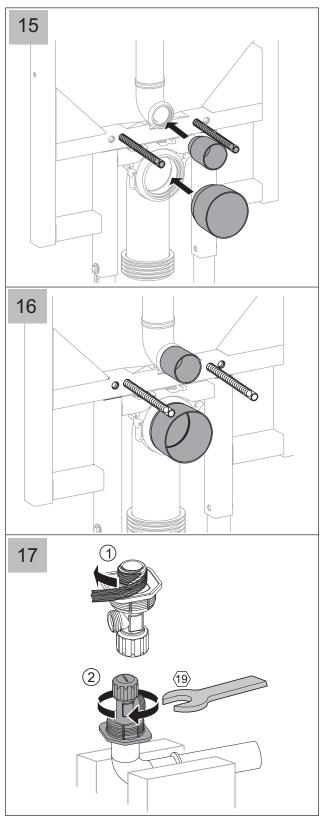

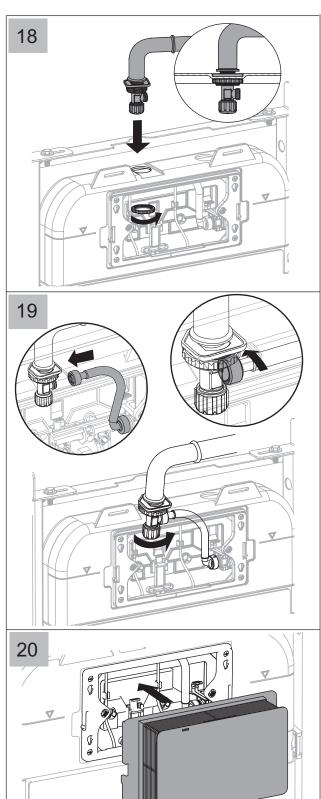



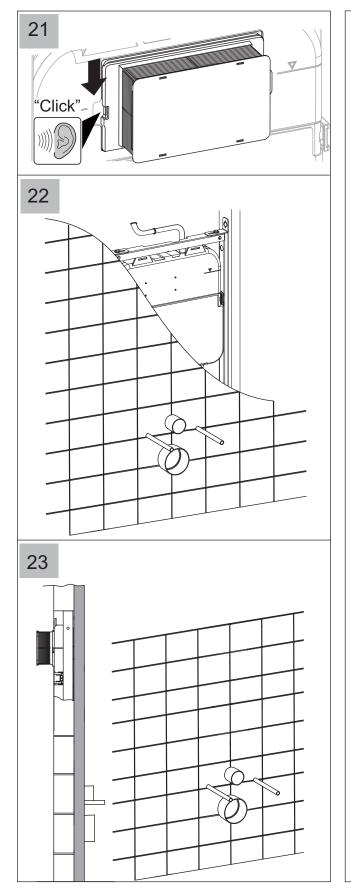

For button installation, refer to individual button instructions



Note: Refer to installation instructions for your selected pan

