



STAINLESS STEEL ELECTRIC

With a stainless steel cylinder and water fittings, Everhot Stainless Steel electric water heaters offer maximum longevity and reduced lifetime maintenance costs in an easy to handle, lightweight package.

And with superior insulation, they comfortably outperform regulated Minimum Energy Performance Standards (MEPS)¹³.

FEATURES

- Available in 50L, 250L and 315L capacities to suit most applications
- Stainless steel cylinder and fittings resist corrosion for longer, extending product life
- Up to 40% lighter¹² for easier handling
- No anode, to reduce lifetime maintenance costs
- Up to 19% better than MEPS¹³ reducing energy use to save you money
- Hi-temp 80°C thermostat (50L model only)
- Dual handed fittings for easier installation
- Made in Australia
- 10 year cylinder warranty¹¹
- Mains pressure
- Full warranty support through a comprehensive national service network

Product data: page 13



STAINLESS STEEL ELECTRIC

SPECIFICATIONS		50L	250L	315L
Stainless Steel Electric	Everhot Model Number	2A1050	2A1250	2A1315
	Reece Product Code	1306813	1306814	1306815
Hot Water Delivery	Litres	50	250	315
No. of People (moderate climate) ¹⁴	Continuous Tariff	1	5-8	5-9
No. of People (moderate climate) ¹⁴	Off Peak/Night rate	N/A	4-6	6-7
kW Rating	kW	3.6	3.6	3.6
Maximum Supply Pressure				
with ECV	kPa	960	680	680
without ECV	kPa	1120	800	800
T&PR Valve	kPa	1400	1000	1000
ECV setting	kPa	1200	850	850
Thermostat Setting (maximum)	°C	80	75	75
Water Hot and Cold Connections		Rp ¾ Female		
PTR Connections ((T&PR Connection))		Rp ½ Female		
Better than MEPS ¹³ by		4.8%	19%	17%
Dimensions				
A	mm	695	1440	1760
B	mm	400	625	625
C	mm	432	630	630
D	mm	385	1000	1320
E	mm	145	220	220
F	mm	65	145	145
H	degrees	30	30	30
J	degrees	60	60	60
M	degrees	60	120	120
Approx. Weight (inc. packaging)	kg	16	45	54

Technical data is subject to change.

Everhot Stainless Steel water heaters are not recommended for installation in some areas.

Refer to www.reece.com.au/ Everhot for details of areas not recommended and where, if installed, product is not covered by warranty.


50L models have left and right hand (dual handed - DH) cold water connections, hot water connections, and T&PR valve fittings.

250L-315L models have left and right hand (dual handed - DH) cold water connections, a hot water connection at the top of the water heater and a T&PR valve fitting on the left hand side.

Note: Allow additional top clearance for the hot outlet fittings and pipe work.

- Warranty: 10 Year cylinder warranty, 1 Year parts and labour on all other components for domestic (non-commercial) installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/Everhot.
- Up to 40% lighter than comparable Everhot vitreous enamel water heater models of same capacity.
- Minimum Energy Performance Standard (MEPS) is a regulated requirement that electric water heaters sold in Australia must meet. Everhot Stainless Steel models perform up to 19% better than MEPS requirement. Performance varies by model, refer to Specification Table for individual models' performance.
- Guide only, subject to individual hot water consumption patterns.

Everhot SS 50L

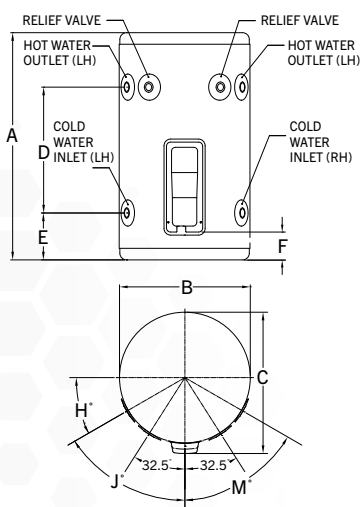

Everhot SS 250L and 315L

