


MOTOR SPECIFICATION

80855BQVA-A25S

Q.R. No.	Y002803	CUSTOMER NO.	6051675S					
CUSTOMER	CLIMATE TECHNOLOGIES							
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	AOM
	RPM.	1370		4.4		AMPS		
	NOM. OUTPUT	750 WATTS						
ROTATION	CLOCKWISE DRIVE END							
CAPACITOR	START	-----	μF/V	RUN	25/400	μF/V		
ENCLOSURE	VENTED							
MOTOR TYPE	CSR	INSULATION CLASS	B130					
THERMAL PROTECTION	AUTO RESET OVERLOAD							
APPLICATION	FAN-EVAPORATIVE COOLER							
BEARING D.E.	6202 DDU C3		LUBRICATION	LONG LIFE, WIDE RANGE				
BEARING N.D.E.	6202 DDU C3							
SUPPLY LEAD	FLEX 850 ± 30 GREY							
EARTH PROVISION	VIA SUPPLIED LEAD							
BASIC BUILD SPECIFICATION	305-570-25	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS					
PERFORMANCE SPECIFICATION	SP85375-01							
CONNECTION DIAGRAM	393-402-06	RATING LABEL	SSTDAUTO.FMT					

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

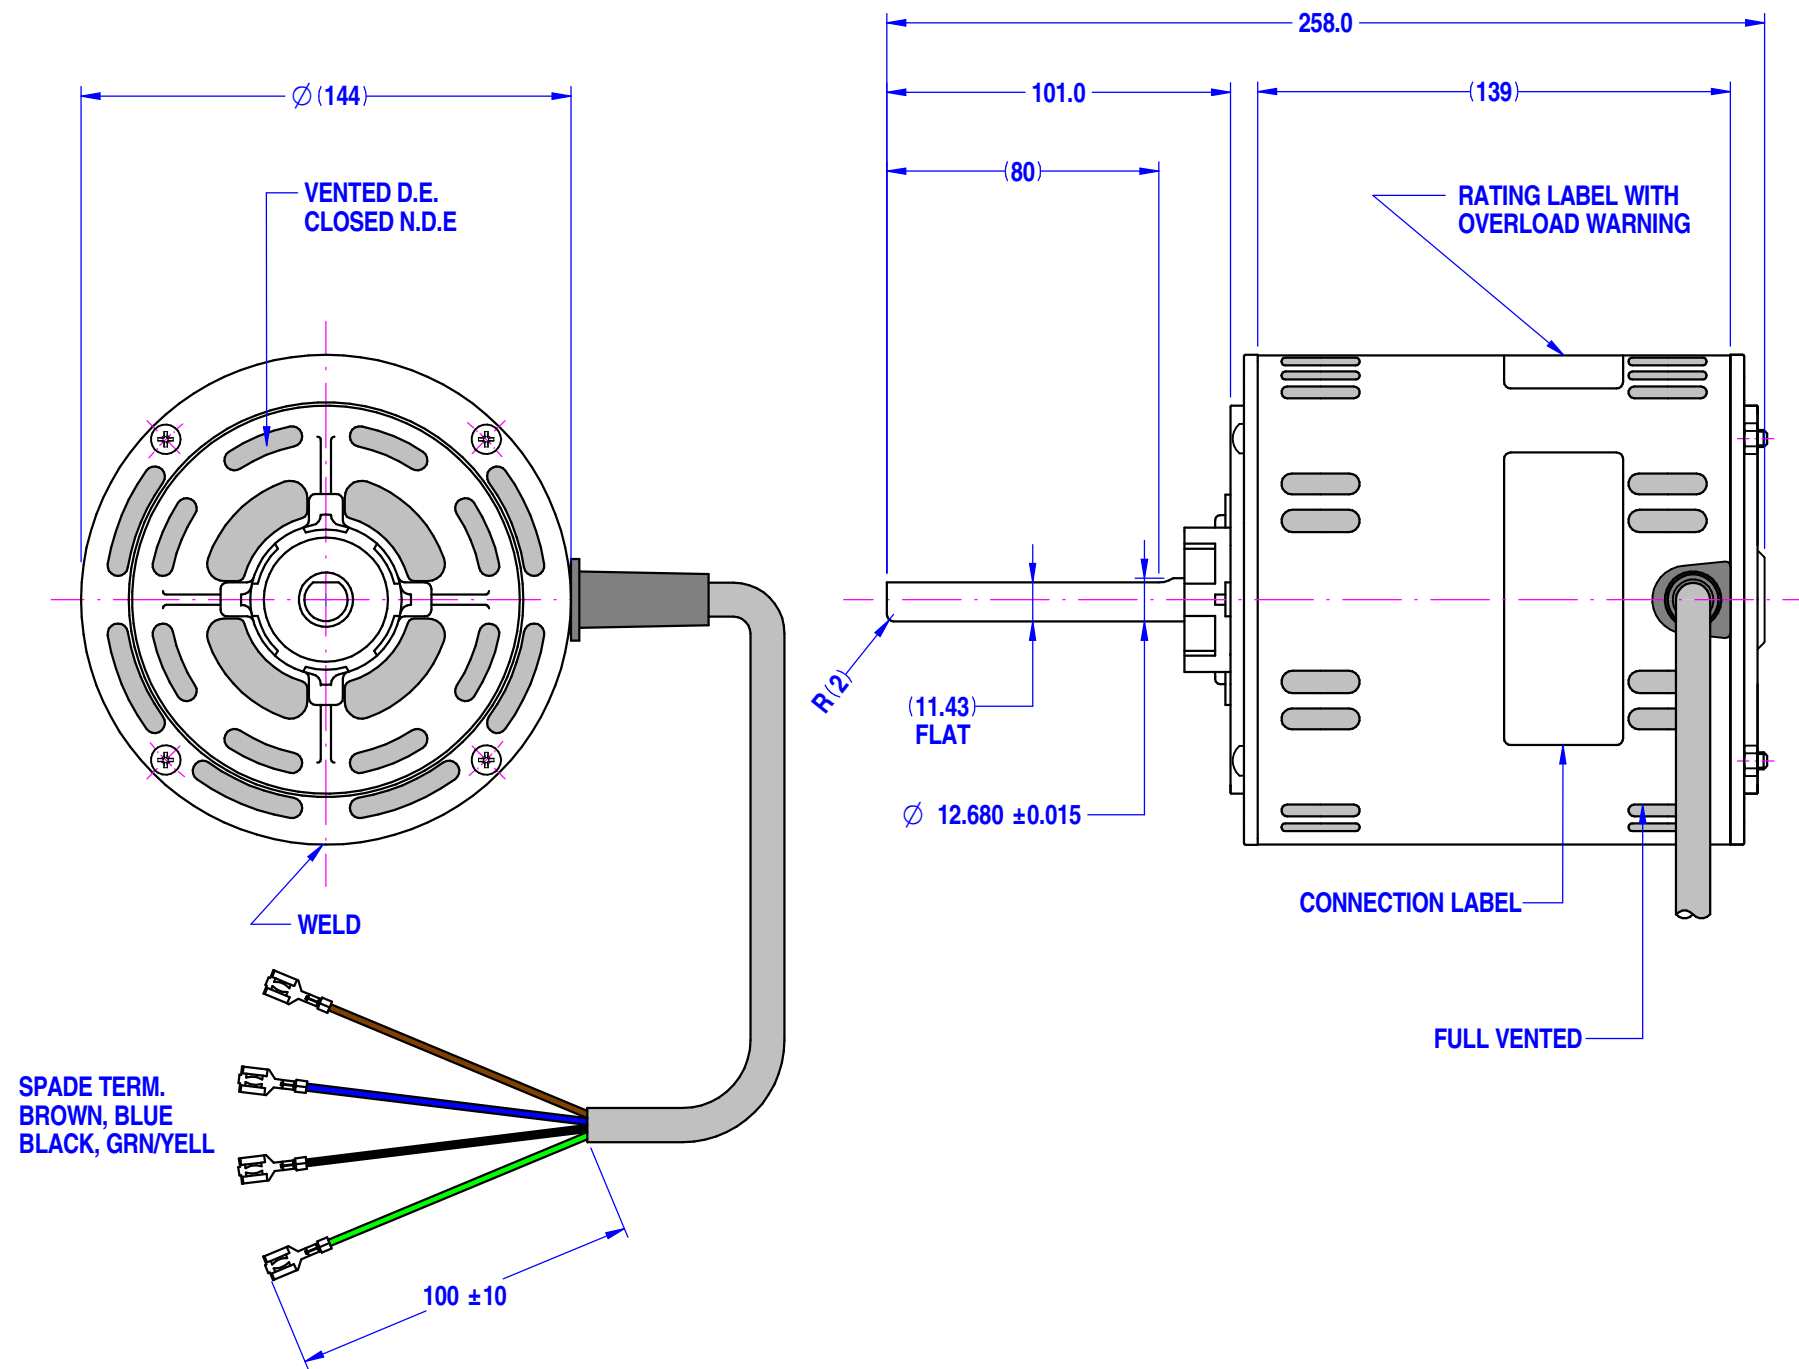

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

6051675S ddmmyyxxxx

MODEL 80855BQVA-A25S

VOLTS 240	R.P.M. 1370	CLASS B130	Hz 50
WATTS 750	TYPE CSR	μF/V S NIL	Ph 1
AMPS 4.4	DUTY AOM	μF/V R 25/400	PROT. AUTO

WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1)_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)_MOTOR MUST BE LOAD TESTED.
- 3)_MOTOR TO BE PACKED IN SINGLE CARTON.
- 4)_STAMP CUSTOMER NO.6051675US ON THE CAP COVER ALL SIDE.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT

9.6

kg.

DRAWN	Nithad	05/07/2005
CHECKED	Pipat	30/10/2018
RELEASED	Kanapote	01/11/2018
SCALE	N.T.S.	



29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTABURI DISTRICT, NONTABURI 11000 THAILAND

FRAME

STATUS

R

SHEET

A3

MOTOR

B375:855BV-750-XAD:CLIMA

DWG. NO.

80855BQVA-A25S

REVISION

C