



Floor Mounted Wall Fixed Drinking Fountain

Model RBA8902-102



Materials & Features

Manufactured from stainless steel with all exposed surfaces in satin finish. Stainless steel, shielded bubbler with self-closing push button and non-squirt features. Valve includes flow adjuster and strainer. Integral splashback and perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Unit is non-refrigerated.

Technical Detail

Inlet Connection:	G½B
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Water Temperature:	4 - 30°C
Basin and Housing:	1.6mm, type 304 Stainless Steel


Installation

Ensure wall construction is suitable to support the unit and mount to wall with front-fixing frame and S-clip provided. Trap and wall anchors by others.

Related Products

- RBA8902-151** Junior Height Floor/Wall Mounted Drinking Fountain (760mm H)
- RBA2750-031** Remote Chiller
- RBA8900-429** Wall Mounted Drinking Fountain, Accessible to AS1428.2

Important: Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

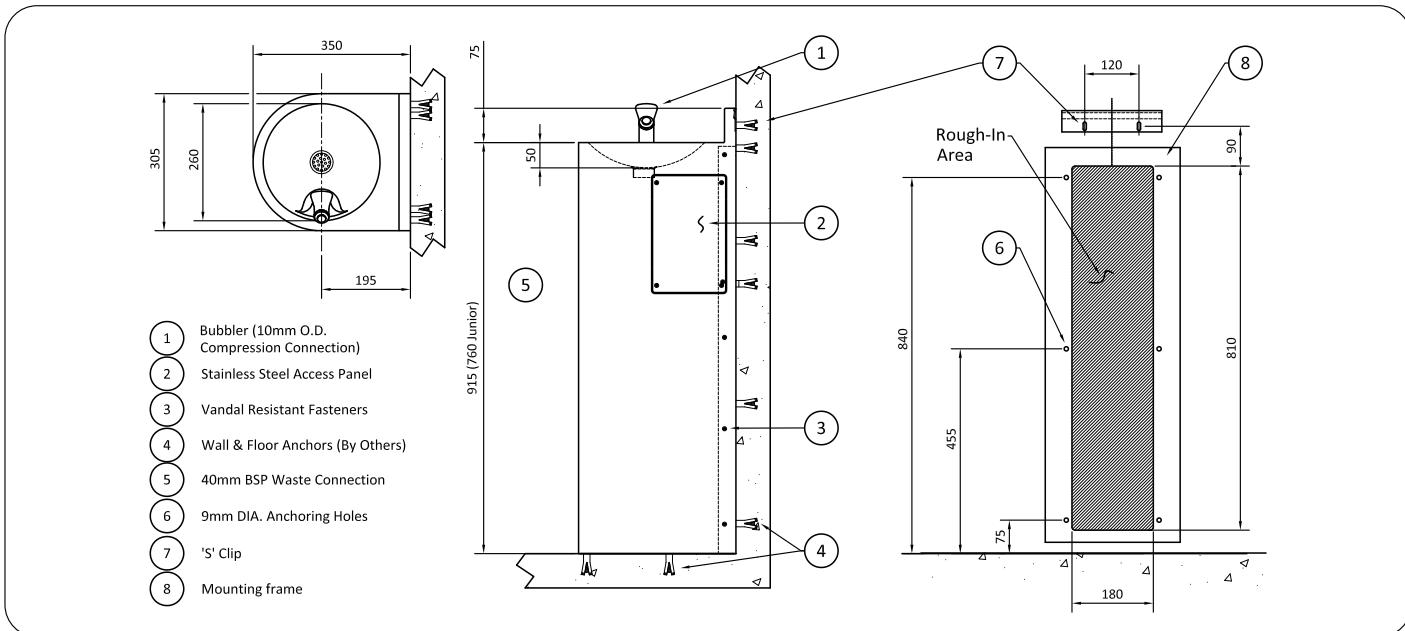

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/20 © 2015 by RBA Group TD/Model RBA8902-102/0320