



SRT-HD

**ROOM TEMPERATURE SENSOR BUILT WITH BOTH
HEVAC -H & -D INDEPENDANT THERMISTORS**


COMBO ROOM SENSOR TO REDUCE RESELLERS HAVING TO STOCK BOTH TYPES OF HEVAC THERMISTOR ROOM SENSORS & REDUCE OCCASSIONS OF SUPPLYING INCORRECT SENSOR . USE SENSOR ELEMENT AS REQUIRED TO SUIT PARTICULAR HEVAC CONTROLLER.

-H ELEMENT FOR : HTC2 & 4 SERIES CONTROLLERS (terminals B & M).

-D ELEMENT FOR : HTC3, 5, DIGITAL, DIGITAL-TC, DIGITAL-LCD & ENDEAVOUR. (terminals 1 & 2).

Dimensions

& CONNECTIONS

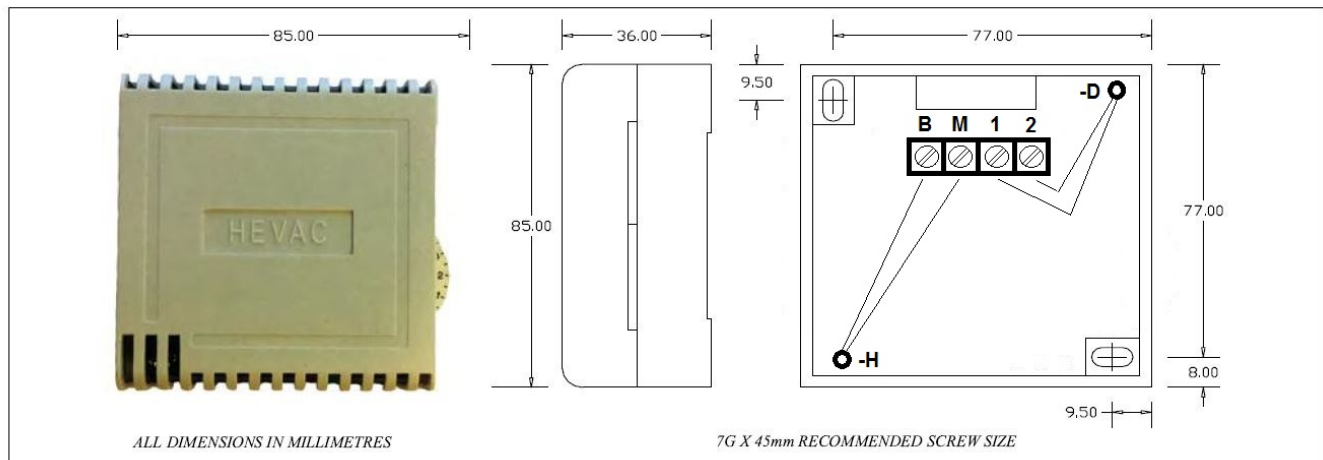

USE ONLY ONE ELEMENT

-H RESISTANCE CHART

TEMP	OHMS	TEMP	OHMS	TEMP	OHMS	TEMP	OHMS
14.00	1834	18.00	1894	22.00	1954	26.00	2015
14.50	1842	18.50	1901	22.50	1962	26.50	2023
15.00	1849	19.00	1909	23.00	1969	27.00	2031
15.50	1856	19.50	1916	23.50	1977	27.50	2039
16.00	1864	20.00	1924	24.00	1985	28.00	2047
16.50	1871	20.50	1931	24.50	1992	28.50	2054
17.00	1879	21.00	1939	25.00	2000	29.00	2062
17.50	1886	21.50	1946	25.50	2008	29.50	2070

-D RESISTANCE CHART

TEMP	OHMS	TEMP	OHMS	TEMP	OHMS	TEMP	OHMS
5.0	6187	14.0	4970	23.0	4145	32.0	3574
6.0	6027	15.0	4862	24.0	4071	33.0	3522
7.0	5874	16.0	4759	25.0	4000	34.0	3472
8.0	5727	17.0	4660	26.0	3932	35.0	3424
9.0	5587	18.0	4565	27.0	3866	36.0	3378
10.0	5454	19.0	4474	28.0	3803	37.0	3334
11.0	5324	20.0	4387	29.0	3742	38.0	3291
12.0	5201	21.0	4303	30.0	3684	39.0	3250
13.0	5083	22.0	4222	31.0	3628	40.0	3211