

# Refrigeration Applications

## Self-Regulating Heating Cable

### Product Specifications

#### Application: Freeze Protection

FLX self regulating heating cables are designed to provide freeze protection for a variety of refrigeration and freezer applications.

These cut to length heater cables are available in power outputs of 16, 33 and 49 watts per meter.

Operating voltage is 240 VAC.

The narrow profile of FLX cables provide the flexibility required for freezer door applications.

#### Rugged and Reliable . . .

FLX self-regulating cables are protected by a tinned copper braid to provide grounding and additional mechanical protection for the cable. An optional outer jacket is available if additional mechanical protection is required.

Heat tracing users expect quality products and services from a reputable manufacturer. Thermon


exceeds these expectations by operating under the ISO 9001 standard for quality.

#### Easy to Design . . .

FLX are self regulating, polyolefin insulated cables which vary output in relation to temperature. FLX cables are used primarily for freeze protection of freezer door frames, condensate drains and general freeze protection. FLX's electrical configuration lends itself to field fabrication of each heat tracing circuit. Field dimensions of the erected piping are not required.

#### Easy to Install . . .

Kits for power connection, end termination and splicing are designed for quick and easy installation.

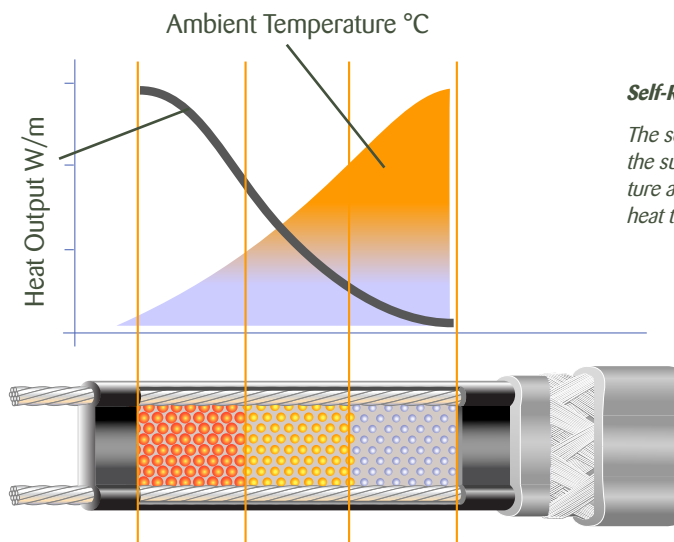

#### Self-Regulating Heat Output

The self-regulating heat output of the cables varies in response to the surrounding temperature. Variations in the ambient temperature are automatically compensated for along the entire length of a heat traced pipe.



**THERMON . . . The Heat Tracing Specialists\***

[www.thermon.com](http://www.thermon.com)

Australian Headquarters  
30 London Dr. • PO Box 532  
Bayswater, Victoria 3153 • Australia  
Phone: +61-3 9762 6900

Corporate Headquarters  
100 Thermon Dr. • PO Box 609  
San Marcos, TX 78667-0609 • USA  
Phone: +1 512-396-5801

For the Thermon office nearest you  
visit us at . . .

[www.thermon.com](http://www.thermon.com)


ISO 9001  
REGISTERED

# Refrigeration Applications

## Self-Regulating Heating Cable


## Product Specifications

### Characteristics . . .

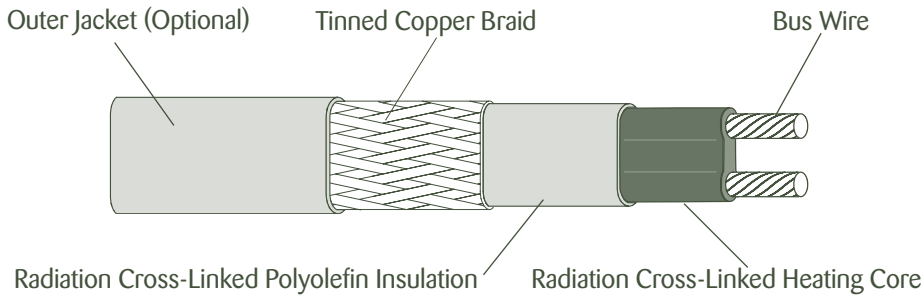

### Nominal Outside Dimension . . .

#### 5 or 10-FLX-2



#### 15-FLX-2



**Note . . .** Dimensions relate to the outer jacket option on the cable. Subtract 1 mm for braided only cables

Bus wire.....	nickel-plated copper
Metallic braid.....	tinned copper
Outer jacket.....	-OJ, polyolefin (optional)
Minimum bend radius	
@ -15°C.....	10 mm
Supply voltage.....	240 Vac
Circuit protection.....	30 mA ground-fault protection required
Maximum continuous exposure temperature.....	power-on: 65°C; power-off: 85°C

### Circuit Breaker Sizing and Type . . .

Catalog Number	240 Vac Service Voltage	Start-Up Temp. °C	Max. Circuit Length vs. Breaker Size		
			20A	30A	40A
5-FLX-2		-18	119.8	179.8	179.8
		10	146.0	182.6	182.6
10-FLX-2		-18	68.6	103.0	121.6
		10	85.3	121.6	121.6
15-FLX-2		10	72	114	131
		-18	52	82	117
		-29	47	73	104
		-40	43	67	95

### Certifications/Approvals . . .

