


MOTOR SPECIFICATION

80855BQVA-A14

Q.R. No.	-	CUSTOMER NO.	-
CUSTOMER	VARIOUS		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty S1 AOM
	RPM.	1350	4.9 AMPS
	NOM. OUTPUT	750 WATTS	
ROTATION	ANTI CLOCK WISE AT DRIVE END		
CAPACITOR	START	-----	μF/V RUN 25/400 μF/V
ENCLOSURE	VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN - SHAFT UP		
BEARING D.E.	6202 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU		
SUPPLY LEAD	FLEX 1100±30 GREY		
EARTH PROVISION	VIA SUPPLIED LEAD		
BASIC BUILD SPECIFICATION	305-570-16	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP85178-03		
CONNECTION DIAGRAM	393-531-02	RATING LABEL	SSTDAUTO.FMT

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

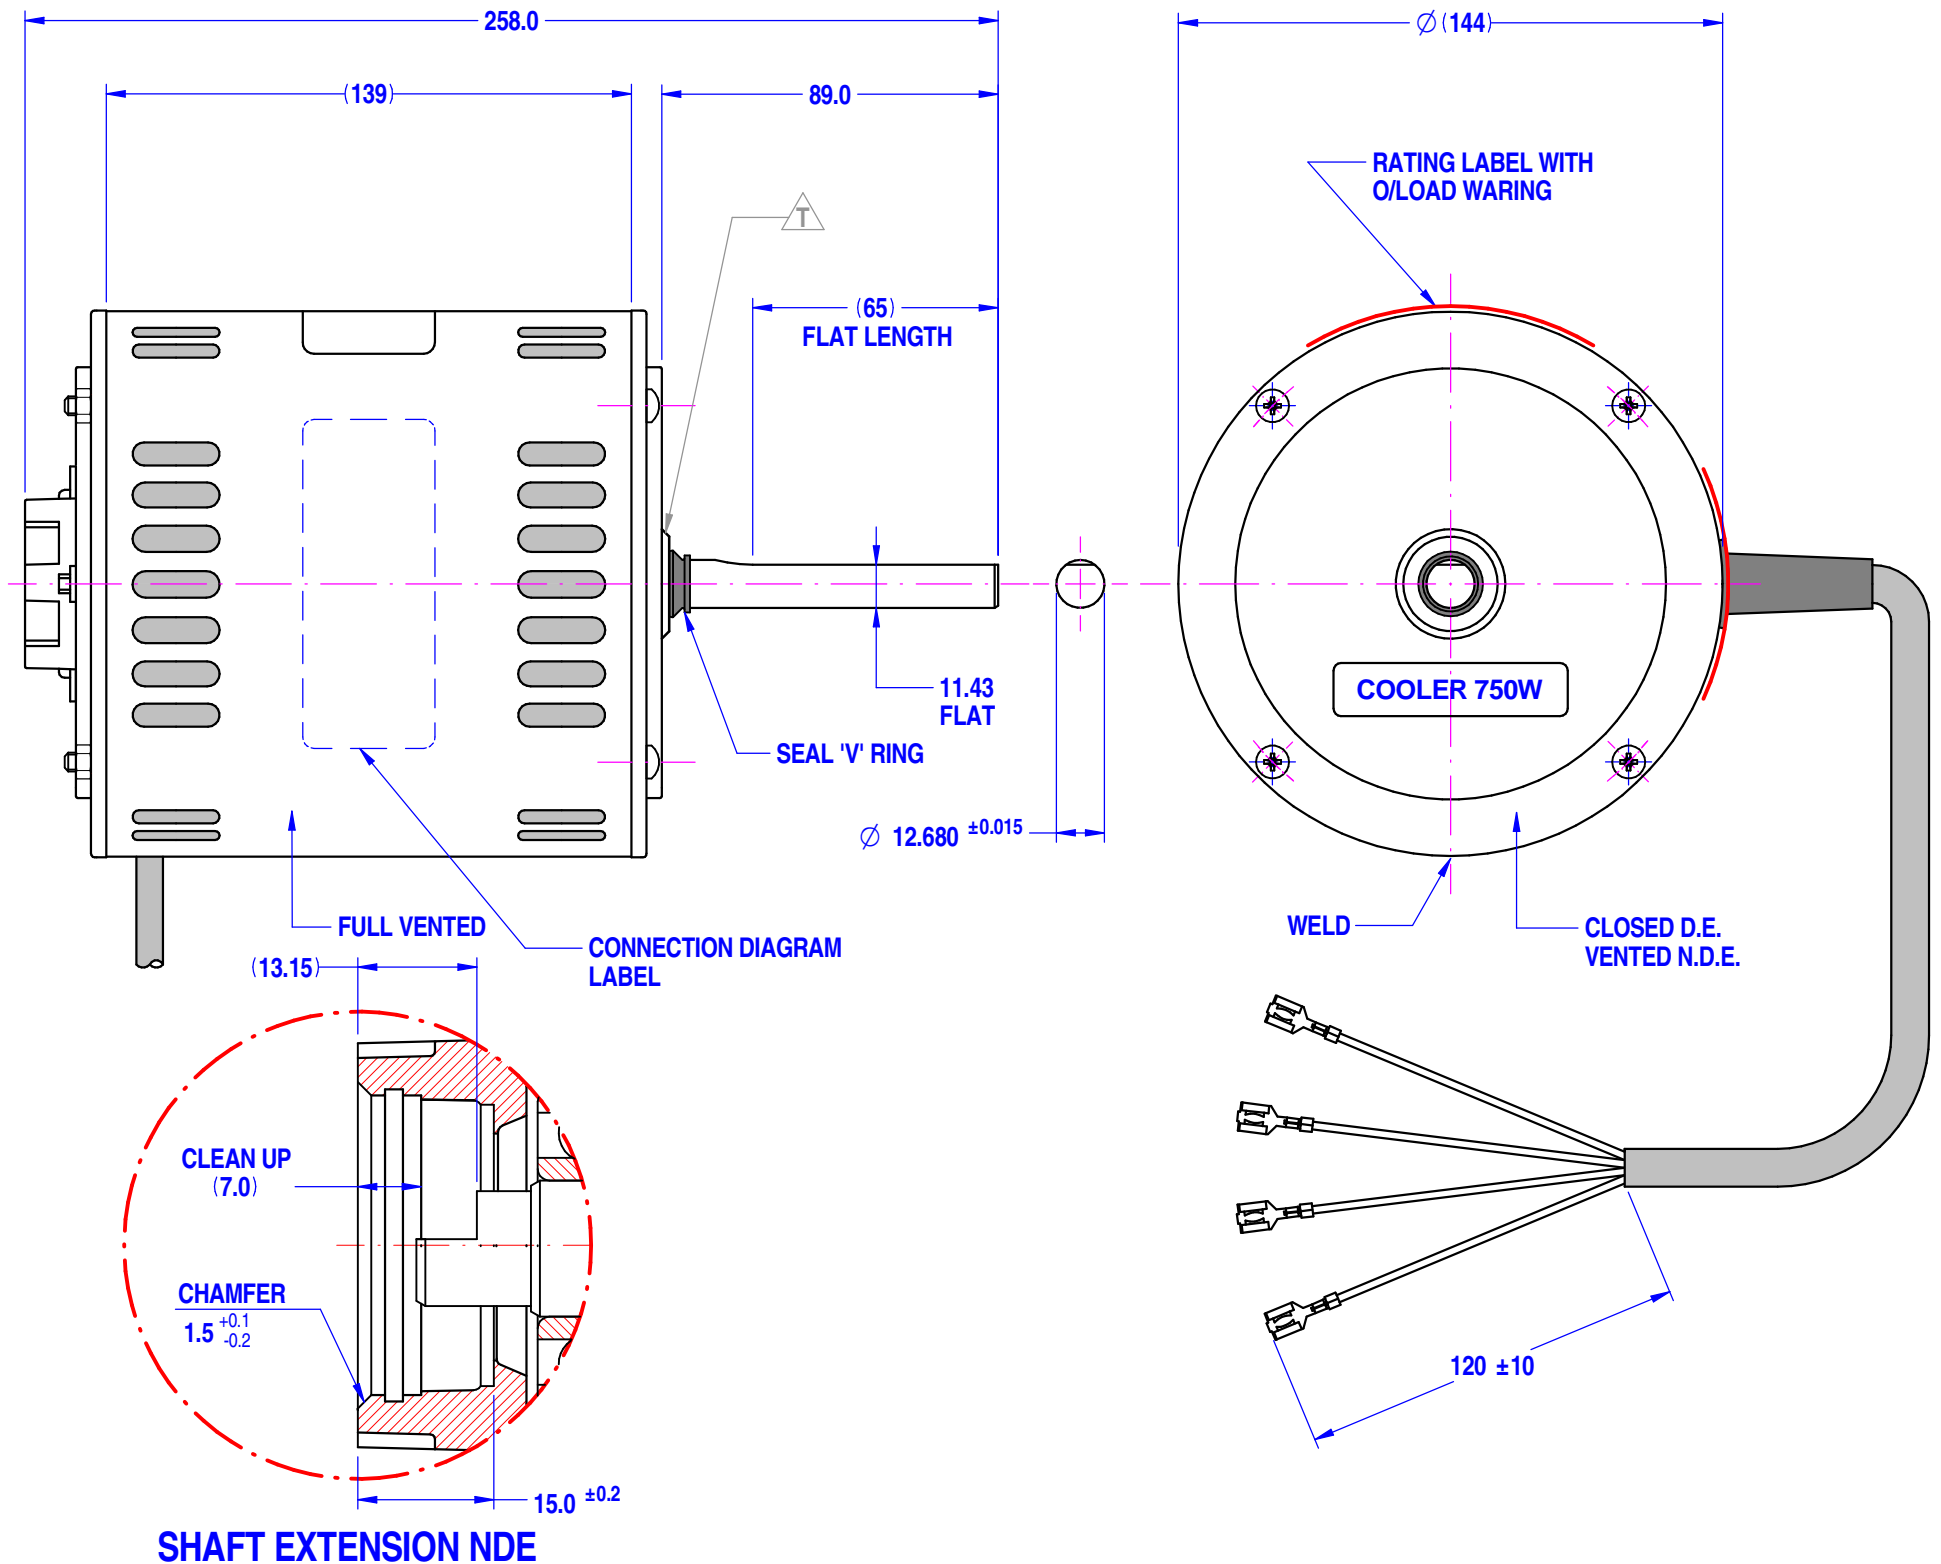

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

MODEL	80855BQVA-A14
-------	---------------

VOLTS 240	R.P.M. 1350	CLASS B130	Hz 50
WATTS 750	TYPE CSR	μF/V S NIL	Ph 1
AMPS 4.9	DUTY AOM	μF/V R 25/400	PROT. AUTO

WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1)_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)_MOTOR TO BE MOUNTED SHAFT UP WITH ABUTMENT WASHER IN THE LEAD END.
- 3)_COOLER LABEL 393-529-01 TO BE ON D.E. ENDSHIELD.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	9.5 kg.	
DRAWN	Muntana	18/10/2018
CHECKED	Pipat	30/10/2018
RELEASED	Kanapote	01/11/2018
SCALE	N.T.S.	

FASCO THAILAND
 29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,
 BANGKRANG, MUANG NONTABURI DISTRICT,
 NONTABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	A3	
DWG. NO.	80855BQVA-A14	
REVISION	W	