



Flex Hose Water

Specification Sheet



SPECIFICATIONS

Application	General hot and cold water applications (above ground)
Features	Female hex rubber cone seal
Working Pressure	1400 kPa
Temperature Range	5 deg C to 90 deg C
Materials	Hose Inner Material - EPDM Outer Braid - Stainless Steel End Fittings - DR Brass Ferrules - Stainless Steel
Standards	AS/NZS 3499
Watermark	WMKA20101

WARRANTY

Product Warranty 10 Years



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Published 21/10/2019


Don't risk it, use a licensed plumber.™





Flex Hose Water

Dimensions				
Product Code	Product Description	Size	Length	Inside Diameter
		(inch)	(mm)	(mm)
107600	Dura Flex Hose Water 1/2" Hex 150mm	1/2	150	8
107601	Dura Flex Hose Water 1/2" Hex 225mm	1/2	225	8
107602	Dura Flex Hose Water 1/2" Hex 300mm	1/2	300	8
107603	Dura Flex Hose Water 1/2" Hex 450mm	1/2	450	8
107604	Dura Flex Hose Water 1/2" Hex 600mm	1/2	600	8
107605	Dura Flex Hose Water 1/2" Hex 1000mm	1/2	1000	8
107606	Dura Flex Hose Water 1/2" Hex 1500mm	1/2	1500	8
107607	Dura Flex Hose Water 1/2" Elbow 225mm	1/2	225	8
107608	Dura Flex Hose Water 1/2" Elbow 300mm	1/2	300	8
107609	Dura Flex Hose Water 1/2" Elbow 450mm	1/2	450	8
107610	Dura Flex Hose Water 1/2" Elbow 600mm	1/2	600	8

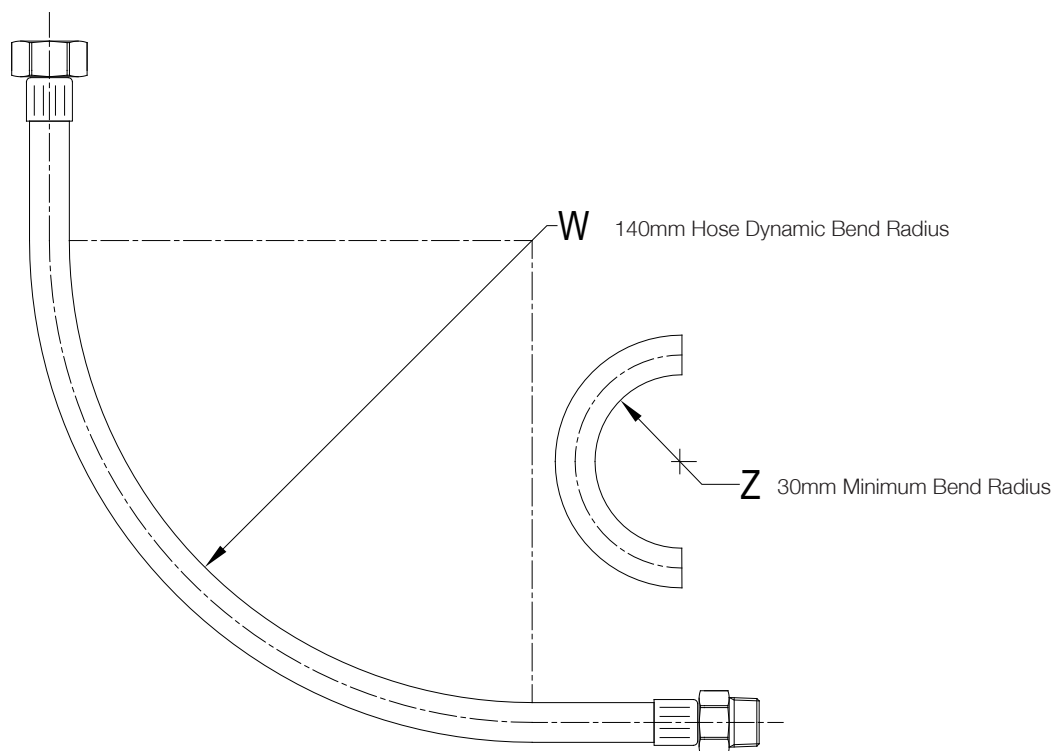



Flex Hose Water

Installation Notes

- Tighten female hex nuts (with rubber cone seal) to 10Nm torque
- The installer is responsible for ensuring proper installation of the product
- Ensure that all threads are clean and that seals are undamaged
- Ensure that there are no leaks after installation
- This product is only to be used on portable water
- Don't install this product directly onto hot water units
- Don't stretch, twist or excessively bend hose
- Hoses are designed for applications above ground, accessible and not submerged
- It is recommended to connect to an isolation valve immediately before the hose