



FastFit Manifold

The ENKi FastFit Manifold is a strong, versatile and easy to use system for irrigation installers. The large selection allows for an endless number of configurations.

How it works

ENKi FastFit Manifold Fittings are assembled by inserting the coupling between two fittings, pressing the fitting together and sliding the locking clips over the lugs. Each join requires two clips and a coupling, except the inlet and the end cap which have built-in coupling.



Benefits

Fast to install with just one push clip

Can be pressurised immediately without tools or glue

Unique O ring design prevents overtightening – and eliminates leaks

Union fittings allow for easy removal or addition of valves without disassembling the manifold

UV resistant and durable, made from virgin engineered plastics

Technical Information

Maximum operating pressure 1400kPA

Tested to 1600kPA

UV resistant







Code	Description	Size
1542921	ENKi FastFit Manifold Union Cross	25mm



Code	Description	Size
1542922	ENKi FastFit Manifold Union Elbow	25mm



Code	Description	Size
1542928	ENKi FastFit Manifold Nipple	25mm



Code	Description	Size
1542923	ENKi FastFit Manifold Inlet	25mm



Code	Description	Size
1542924	ENKi FastFit Manifold End Cap	25mm



Code Description	
1542925 ENKi FastFit Manifold Coupling	25mm



Code Des	scription	Size
1542929 EN	Ki FastFit Manifold Union Valve Adaptor	25mm



Code	Description
1542926	ENKi FastFit Manifold Plain Clip




Code	Description
1542927	ENKi FastFit Manifold Wall Mount Clip





FastFit Manifold

Underground Example

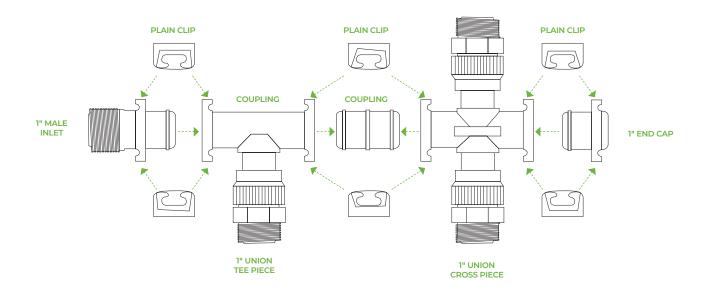

Wall Mounted Example

