

## LIQUID LEVEL ALARM DELUXE OUTDOOR

The REEFE Liquid Level Alarms are designed to provide warning indication when a storage tank is either empty or full. The buzzer can be muted via a mute button. If not muted the audible buzzer will automatically silence after 5 minutes. If a continuously sounding audible alarm is required, this can be done by changing the jumper position on the circuit board. Both the audible and visual alarm will run for up to 6 hours. The visual alarms will continue to remain on, until the alarm condition is resolved. A standard feature of the Level Alarm is a 'Voltage Free' (5 amp rated) output for connection to auxiliary devices. Controller can be installed up to 50m from the tank being monitored. Float switch cabling is 'safe', low voltage circuitry. Warning indication is determined by a float switch. Warnings are Audio (buzzer) and Visual (LED Pilot Light and / or Strobe)

### FEATURES & BENEFITS




- Warning indication for storage
- Ideal for effluent, greywater or rain water tanks
- Suitable for below or above ground tanks
- Supplied with 10m float switch standard (3m, 5m or 20m float)
- Controller can be installed up to 50m from tank (longer cable required on float switch)
- Safe 12V low voltage cabling on float switch
- Can be installed for High Level or Low Level alarms
- Mute button to silence alarm
- IP55 enclosure for outdoor installation
- Audible Alarm sound level is 90dB

CODE	MODEL	OPERATION	DESCRIPTION	FLOAT SWITCH (M)	INPUT VOLTAGE	FLOAT VOLTAGE
24379				3		
20340	RLA10	Standard	Deluxe Liquid Level Alarm with float switch and strobe	5	240V	12V
12988.2				10		

## LIQUID LEVEL ALARM FLUSH INDOOR

Housed behind an attractive standard switch plate, is the unique flush mounting Liquid Level Alarm. Purpose built for the modern home environment, where septic, wastewater and rain water tanks, both above ground and below ground, have become a common feature. This discreet device blends with the decor of any home. The level alarm can be used for either low or high level alerts and provides for a safe, low voltage cabling installation between tank float switch and display unit.

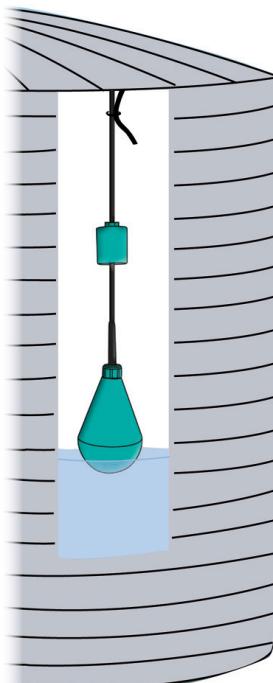

### FEATURES & BENEFITS

- Discreet flush mounted plate
- Ideal for septic, wastewater
- Suitable for below or above ground tanks
- Safe low voltage cabling
- Supplied with 10m float switch

CODE	MODEL
12989	Standard Liquid Level Alarm with float switch - for indoor