

Power Flue Wall Furnace

Ideal for heating the living area or entertainment spaces of your home, the Braemar Ecostar Power Flue Wall Furnace (PWF) delivers comfort and warmth throughout the cooler months. A great replacement for existing wall furnaces, with an energy efficiency of up to 4.5 stars.

The PWF utilises a powered flue system - safely expelling combustion emissions outside, leaving you in cosy warm comfort inside.

## Range

### **Braemar Ecostar Power Flue PWF30**

The PWF30 is a functional and stylish replacement for existing wall furnaces and is able to heat up to 95m<sup>2</sup>.\*

### Braemar Ecostar Power Flue PWF40 (commercial applications only)

The PWF40 will heat an approximate area of 80 - 120m<sup>2\*</sup> and is recommended for light commercial or very large domestic applications such as halls and large rumpus rooms. It is not suitable for smaller domestic applications due to the higher heat and air flow rates.

#### **Features**

- Overheat safety switches
- Thermostatic temperature control
- Self diagnostic control system
- Cool-to-touch cabinet
- Pre-heat function
- Soft-air function
- Child lock
- Inbuilt and console models

- PWF30 natural gas and propane
- PWF40 natural gas only
- Multiple fan speeds
- Electronic ignition
- Electronic flame sensing
- Power flue
- Dual gas rate
- Boost setting for rapid heating



No emissions inside with ultrasafe power flued heating



Have it your way
Stylish design with flexible installation options

# Option to heat two rooms

Installing your wall furnace on an internal wall? An optional rear register kit means an adjoining room can also be heated.





\*Refer to page 2 for technical specifications.




## Technical specifications

Model	Dimensions (mm)				Star rating	Gas input (MJ/hr)		Heat output	Area that can be heated (m²)*		
	н	W	D (inbuilt)	D (console)		Low	High	kW	Cold	Cool	Mild
Ecostar Power Flue PWF30	2050	498	167	260	4.5	20	28	6.4	65	85	95
Ecostar Power Flue PWF40	2050	498	167	260	4.2	25	38	8.6	80	100	120

<sup>\*</sup>Area that can be heated is an indication only and is based on brick veneer construction, insulated walls and ceilings, 2.4m ceiling height and suitable window coverings. A heat load calculation for the intended installation should be undertaken to determine the correct unit required for your specific application.

## Flexible installation options

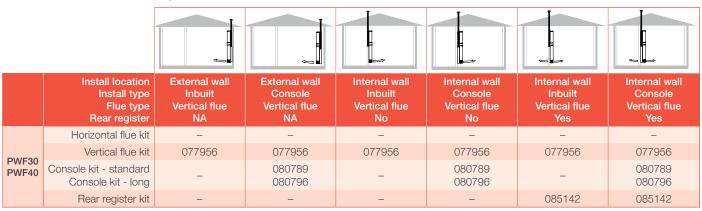

Console kit - standard: up to 3.3m ceiling height Console kit - long: up to 4.0m ceiling height

### Warranty

Braemar space heaters and wall furnaces are backed by a 2 year warranty and 10 year heat exchanger warranty.







SPACE FOR DISTRIBUTOR TO ADD THEIR OWN INFORMATION