

SBA

SUBMERSIBLE BOOSTER WITH INTEGRATED PRESSURE SWITCH

Approved for
Drinking Water
AS/NZS 4020

2
YEAR
WARRANTY

WATER SOURCE



Above
Pump Level



Below
Pump Level

APPLICATION



Household
Water



Irrigation

The Grundfos SBA is a compact, submersible booster pump with integrated pressure switch designed for the delivery of clean rainwater into the home.

- **Easy submerged installation – plug & pump** - Connect the pump outlet to the pipework, plug into a power outlet and you're ready to pump
- **Automated control and ongoing protection** - An integrated pressure switch and float switch provide pump control and protective features.
- **Virtually silent submerged operation** - Won't disturb your family or neighbours
- **For water sources above or below ground** - Designed to be submerged in either above ground water tanks or below ground water sources



SCAN THE QR CODE
TO LINK TO GRUNDFOS
PRODUCT CENTER

PUMP NOISE



SBA

25 dB Max.



SCALA2

47 dB Max.



CM Booster
Self-Priming

55 dB Max.



Jet Pump
Range

70 dB

PUMP SIZING

High pressure for double storey dwellings and long runs of pipe	SBA 3-45	SBA 3-45	
Adequate pressure for most single storey dwellings	SBA 3-35	SBA 3-35	SBA 3-45
	Small House 2-3 taps	Medium House 3-4 taps	Large House 4-5 taps


Taps are 15 l/min at 22.5 m head

PROTECTION & CONTROL

	SB	SBA
Auto Start/Stop via Pressure Switch		✓
Non-Return Valve		✓
Dry Run Protection via Float Switch	✓	✓

TECHNICAL & PERFORMANCE DATA

PERFORMANCE CURVE

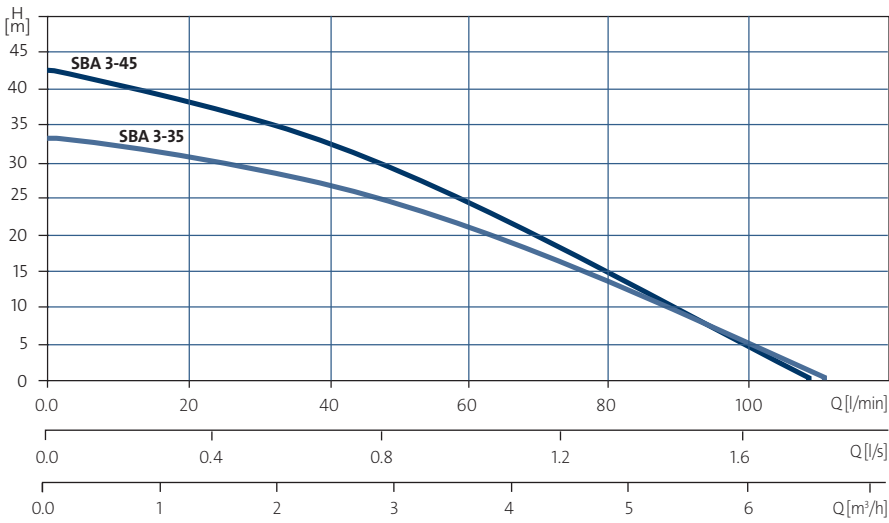


OPERATING CONDITIONS

Liquid Temperature	0°C to +40°C
Max. Installation Depth	10 m
pH value of pumped liquid	4-9
Sound Pressure	Max. 25 dB

TECHNICAL DATA

Power Supply Voltage	220-240 Volt, 50 Hz
Power Supply Cable	15 m with plug
Enclosure Class	Suitable for submerged installation (IP68)
Approvals and Markings	Approved for Drinking Water AS/NZS 4020 C-Tick Compliance

PHYSICAL ATTRIBUTES

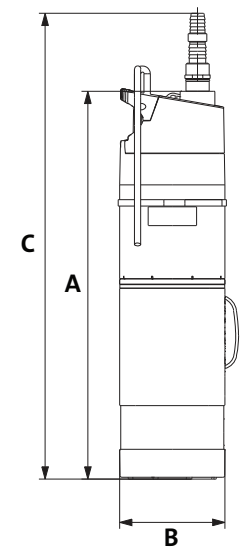

Model	Motor Power P2 (kW)	Connections		Dimensions (mm)			Weight (kg)
		Inlet	Outlet	A (h)	B (w)	C (outlet)	
SBA 3-35 A	0.54	Stainless Steel Strainer	¾" or 1" Female	528	150	621	9
SBA 3-45 A	0.62	Stainless Steel Strainer	¾" or 1" Female	553	150	646	10