

Milla


AXON BASIN MIXER SET

INSTALLATION INSTRUCTIONS


Important Note

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.

WATER SUPPLY REQUIREMENTS



Recommended Working Pressure 150 KPa Min. 550 KPa Max.



Maximum hot water temperature 75°C

Note:


- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Failure to comply with the above may void all warranties.

Maintenance and Care

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- **Do not** use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


Mixer Operation




Removing The Aerator Retainer

Remove the screw. Screw T-Tool onto Aerator Retainer. Shake and pull T-Tool to remove Aerator Retainer.

To remove Aerator Retainer without T-Tool, place your hand underneath the aerator retainer. Turn on water gradually until the aerator retainer is washed out into your hand.



MILLA AXON WALL MIXER WITH OUTLET INSTALLATION INSTRUCTIONS




1 Fasten screws to secure Wall Breach Assembly in place.


Attach water supplies. **TEST AND CHECK FOR LEAKS**

Do not remove the protective cover until final fit-off.

2 Create Ø45mm and Ø25mm round holes 55mm apart, centre to centre, in cement sheet.




3 Tile around the wall breach assembly and make sure the cuts are covered by the cast outlet.




Remove the plastic protective cover from the mixer body.

4 Screw on the cartridge extension in the distance of 55mm from the wall.

Fasten both grub screws firmly onto the flat surfaces of the cartridge extension.




5 Cut the G1/2" tail to length. Apply Teflon tape to G1/2" Tail. Ensure that O-rings are fitted to Outlet Adaptor. Screw on G1/2" Outlet Adaptor.




6 Fit O-ring to the back of the cast outlet. Push the cast outlet into position gently.

Hand fasten the mixer locknut onto Wall Breach Assembly.

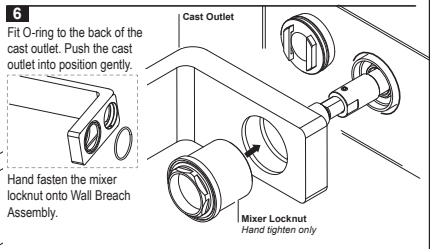


7 Fasten Grub Screw firmly. Fasten the mixer locknut firmly with a spanner.

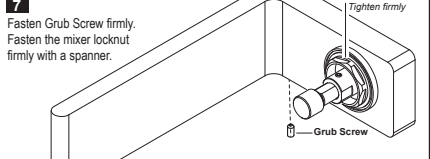

8 Ensure that the nylon washer is fitted into the recess on the mixer locknut.

Set the cartridge to off position by turning the cartridge spindle Anti-Clockwise until it stops.

Push on the mixer handle. Fasten the grub screw firmly. Push on the screw cap.



IN0228 revC

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference