



Milli Mood Edit Heated Towel Rail Swivel

INSTALLATION INSTRUCTIONS

- Slide Towel Rail (4) into Wall Bracket (1) and Hold unit in position, with a pencil outline both brackets and remove from wall.
- Feed existing wall cable through bottom Wall Bracket (1), using a pencil and Wall Bracket (1) mark the centre of each screw hole and cross it for accuracy
- Drill a hole for the Screws(3) and insert nylon plug into tiled wall (if applicable). Installer may choose to use alternative screws to suit the application. Installer MUST use a DIAMOND HEAD drill bit.

A QUALIFIED ELECTRICIAN MUST THEN CONNECT TOWEL RAIL ELEMENT TO EXISTING WALL CABLE.

- Using a pencil and the Top Wall Bracket (1) mark the centre for each screw hole, and cross for accuracy. Drill holes for the screws (3), & insert nylon plugs into tiled wall (if applicable).
- When the Top Wall Bracket (1) is in place, slide the Towel Rail (4) into position towards the wall.

DO NOT OVERTIGHTEN SCREW - LEAVE SLIGHT ADJUSTMENT OF THE FLANGE (SLACK) TO ENABLE MOVEMENT WHEN THE TOWEL RAIL IS POSITIONED.

- Insert Grub Screw (5) into Wall Brackets (1)
- With the Allen Key provided, tighten the Grub Screw until tight to ensure that towel rail stays in position.
- Push down on cover plate (6) and secure in place.

WARNING



TOWEL RAILS MUST ALWAYS BE INSTALLED WITH THE ELEMENT PLACED AT THE BOTTOM FOR CORRECT HEAT TRANSFER.



Please ensure that the measurements are taken accurately and that the screw is in a stud or noggin to provide support. Do not overtighten screws.

Please ensure a DIAMOND HEAD drill bit is used to drill screw and cord holes into tiled wall.

Hydrotherm take pride in the fact that all rails are individually hand made. Due to this fact some measurements may not be exact. PLEASE READ INSTRUCTIONS CAREFULLY and do not force towel rail into bracket if position of wall flange is not accurate.

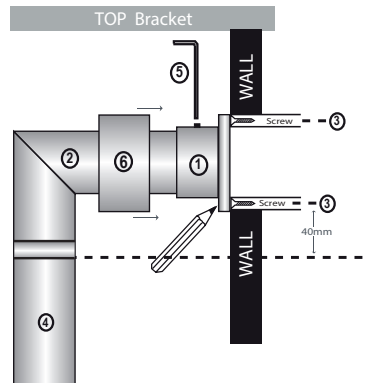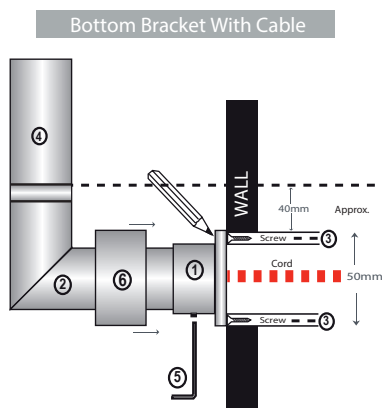

- 1 Wall Bracket x 2
- 2 Bracket Arm
- 3 Wall Screw**
- 4 Towel Rail
- 5 Allen Key & Grub Screw
- 6 Cover Plate

**INSTALLER MAY CHOOSE NOT TO USE SCREW IF NOT SUITABLE FOR APPLICATION

Please read instructions carefully.

Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference



Milli Mood Edit Heated Towel Rail Swivel

WARNING

This product must be installed by a qualified electrician in accordance with AS/NZS 3000 wiring rules. Switch off the electrical supply at the mains before installation and maintenance. A means of disconnection must be incorporated in the fixed wiring in accordance with the wiring rules. Suitable for bathroom and non-bathroom/dry areas. Not suitable for above baths, nor for installation in saunas, steam rooms or shower cubicles. Please consult with a qualified electrician to confirm appropriate compliant installation location.

Do not connect to a plug and socket outlet. Rated IPX5 and suitable for indoor use only. Do not fix to damp or conductive surfaces. Site well away from curtains and fabrics. Switch off after use. Do not leave on for prolonged periods. This appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities.

Please consult with a qualified electrician to confirm appropriate compliant installation location.



WARNING:

This appliance is not intended for use by young children or infirm persons without supervision.

CAUTION:

The cord extension set must be positioned so that it is not subject to splashing or ingress of moisture.

The supply shall have means for disconnection with an air gap in all active conductors incorporated in the fixed wiring according to the Wiring Rules in AS/NZS 3000:2000.

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive cleaners.

Damage caused by improper treatment is not covered by the product warranty. Refer to Warranty Conditions.