



# RECYFIX®STANDARD 150

RECYFIX®STANDARD 150, trafficable, Type 01 with slotted Stainless Steel Heel Guard grating SS304, locked, 1,0 m

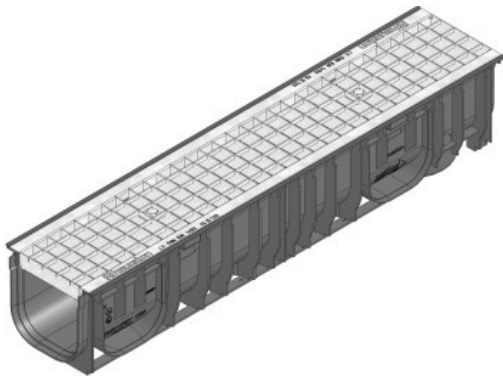

*Sustains  
car traffic*

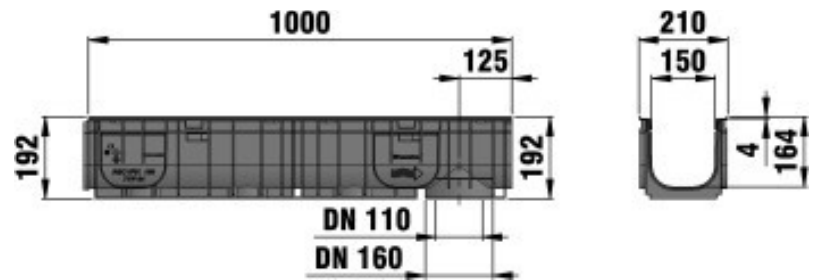

## ■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm <sup>2</sup> /m	Internal channel cross-sect. cm <sup>2</sup>	Inlaying depth	Item-no.
1000	210	192	7,7	1081	225	32	47318

## ■ Product description:

RECYFIX STANDARD 150 type 01 - channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 110/160, with slotted heel guard grating, Stainless Steel, with locking device, trafficable, L/W/H 1000x210x192 mm, item no. 47318

## ■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Stainless steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** strip Stainless steel

## ■ Type acc. DIN EN 1433:

M

## ■ Application areas:

- Architecture and Design
- Stations and platforms
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parks and gardens
- Underground parking
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!