



Venice Wall Hung Vanity

Pre-Installation Checks

Please take time to read and perform these checks before proceeding to the installation instructions.

This product must be installed by a qualified trade's person in a professional manner.

All Omvivo cabinet drawers are fitted and adjusted before being distributed. It is the responsibility of the installer to make any necessary adjustments to door/drawers after installation.

Caution: When lifting or installing heavy items always seek assistance, never attempt to lift or maneuver alone. Always follow safe practices and use personal protective equipment (PPE).

1. Inspect all items upon delivery.

If you believe there is a fault, damage or the item is incorrect, contact the place of purchase immediately and do not proceed with installation. Proceeding with installation will immediately void warranty. The manufacture will not be liable for installation or removal costs.

Omvivo allow 7 days from receipt of goods for notification of any discrepancies in goods received.

2. Ensure you have the appropriate equipment

You will need:

- Spirit Level
- Power Drill
- Bathroom Silicone
- Fixings

The installer is to determine appropriate fixings for installation location, substrate and other environmental factors.

3. Read the specification documents of your basin and check for special plumbing or mounting requirements

Basin installation requirements vary between brand, manufacturer and style.

4. Test fit your basin onto bench top

Check that the basin fits over/into the cut-out in the bench-top.

5. Determine mounting position

Cabinets should be positioned at least 300mm from the closest wet area.

The materials used in the production of our cabinets are moisture resistant not water proof, excessive exposure to moisture will cause damage.

Cabinets should not be mounted in a corner or flush between two walls.

Always check for potential interferences between cabinet drawer and other fixtures and fittings such as doors, windows, switches, hardware, furniture etc.

6. Check that your wall is flat, level and square

The wall you are mounting to must be flat level and square from floor to ceiling (vertically), and left to right (horizontally).

If necessary use packers to level cabinet and prevent twisting. If cabinet becomes twisted drawer alignment and function maybe affected.

7. Make sure you have appropriate support

Your wall should have appropriate support beams (studs/noggins) to mount your cabinet to. Supports should run the entire length of the cabinet and be positioned according to the mounting information supplied in this document.

8. Test fit all plumbing components

Test fit all plumbing components from basin to waste point at wall and check for any interferences with internal cabinet components before continuing.

**FAILURE TO ADHERE TO THE ABOVE PREPARATION OR INSTALLATION INSTRUCTIONS
WILL VOID YOUR WARRANTY**

Venice Wall Hung Vanity

VENICE CABINET INSTALLATION INSTRUCTIONS

NO claims for damages / defects will be recognised after installation.

Prior to installation it is important to unpack and inspect your products to ensure no damage has occurred in transit and that the product IS CORRECT.

If damage has occurred, or a visible defect exists, do not proceed with installation and contact supplier IMMEDIATELY.

Venice cabinets are not designed to be positioned in a corner or flush between two walls. If this is unavoidable the installer is to determine appropriate distance from adjacent wall.

Read all instructions beforehand, pay particular attention to locations of plumbing, brackets and measuring up of these.

Step 1. Remove drawer/s from cabinet before installation.

- Squeeze large handles on locking devices. See figure 1**.
- Pull drawer straight out and up at a slight angle***.

****Drawer component appearance may vary from illustration**

*****Drawer installation and operations adjusted and tested before leaving factory, all further adjustment required after installation it is the responsibility of the licensed installer. See fig 7.**

Step 2. Using appropriate fixings¹, secure brackets to wall so they are level and at correct spacing for cabinet. See figure 2.

¹It is the responsibility of the installer to select appropriate fixing materials. It is also the responsibility of the installer to ensure fixings used are flush to the bracket and not installed at an angle.

Figure 1.


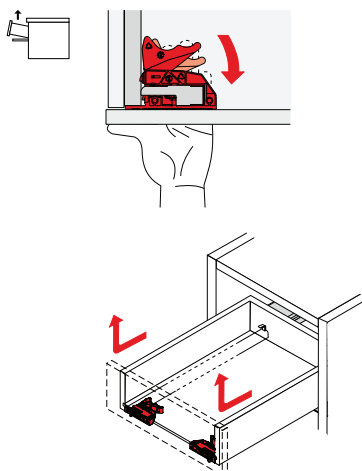


Figure 2.

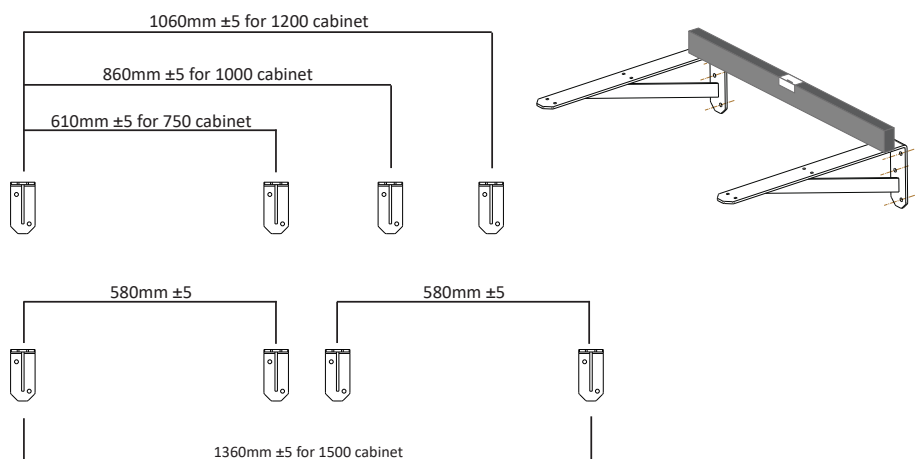

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

Venice Wall Hung Vanity


VENICE CABINET INSTALLATION INSTRUCTIONS

Step 3. Rough in plumbing from wall according to basin configuration i.e. left / right / centre / double.
For dimensions of cabinet rear cut-out see figure 3.
For Venice 450,500, 700 and 500 semi-inset basin plumbing location see figure 4.


Note: Venice basin horizontal plumbing positions correspond with centre position and relevant cut-outs shown in figure 3. Figure 3 cut-out centres do not always correspond to plumbing centres of other basins.

Ensure that basin and plumbing components are temporarily assembled to cabinet first to determine exact vertical and horizontal plumbing out position at wall. Also assemble and check drawer clearance to micro-trap.


Figure 3.

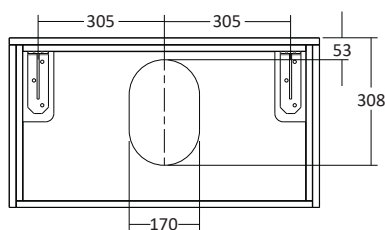


Venice 750 Cabinet

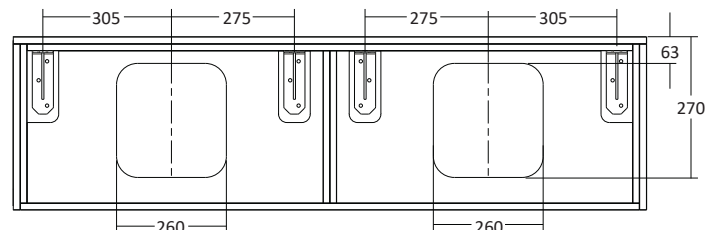

Venice 1500 Cabinet

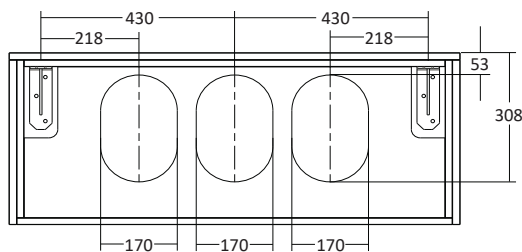


Venice 1000 Cabinet

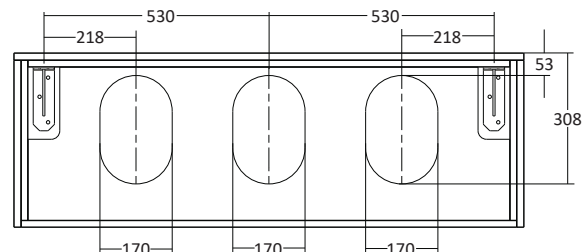

Venice 1200 Cabinet


Figure 4.

Venice 450,500 & 700 Counter Basin



Caution: 75±5mm from top of brackets to centre of outlet at wall. This is very important for Venice basin micro-trap plumbing and installation.

Venice 500 Semi-inset Basin



Caution: 155±5mm from top of brackets to centre of outlet at wall. This is very important for Venice basin micro-trap plumbing and installation.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

Venice Wall Hung Vanity

VENICE CABINET INSTALLATION INSTRUCTIONS

Step 4. With drawer removed, slide cabinet onto bracket and into position. Ensure cabinet back is positioned hard against the wall and it is square and level. See figure 5.
It is recommended that the vanity be sealed along the edges that meet the wall around the top with good quality bathroom silicone.

Step 5. Fasten cabinet to bracket on underside of top using fasteners supplied. Fix the bottom corners of the cabinet to the wall at the inside rear of the cabinet². See figure 6. Use additional fixings for support if required.

Caution:

²If the wall is not square, packers must be used to ensure the cabinet does not become twisted. If the wall is not level vertically or horizontally the drawer may not be aligned or operate properly. It is the responsibility of the installer to select appropriate wall fixings.

Step 6. Once secured to wall install basin³ and re-insert drawer and adjust as required. See figure 7.

IMPORTANT: ³It's the responsibility of the installer to create a water tight seal between the basin and the vanity top. It is also the responsibility of the installer to take appropriate precautions to prevent water penetrating the exposed edges of the bench top cut-out. Omvivo will not be held responsible for any damage that occurs to vanities or bench-tops due to; incorrect installation; water seepage or leaks.

Figure 5.

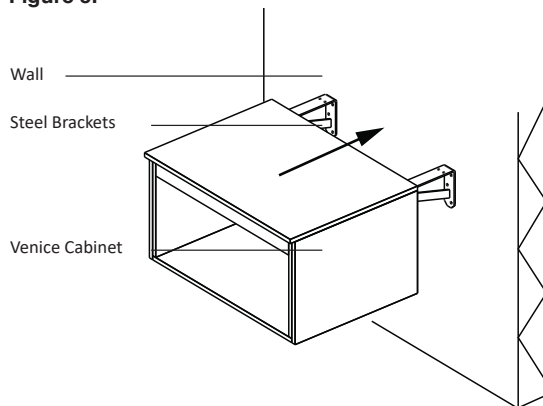


Figure 6.

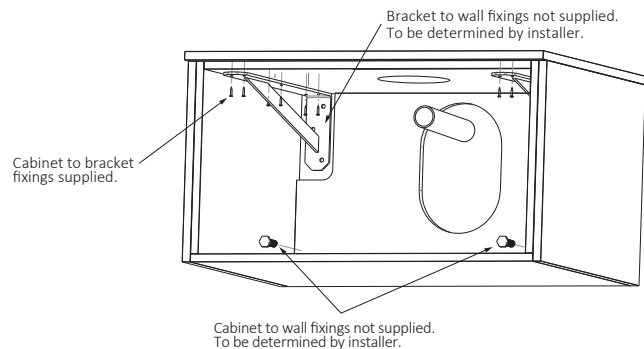


Figure 7.

