


Tapware is to be installed by a Licensed Plumber in accordance with AS/NZS 3500:2003

Recommended working water pressure 300-500 kpa.  
Maximum water temperature is 65 deg.c.

INSTALLATION GUIDE

Scala 32mm Hob Outlet Curved  
Product code: SHO325C

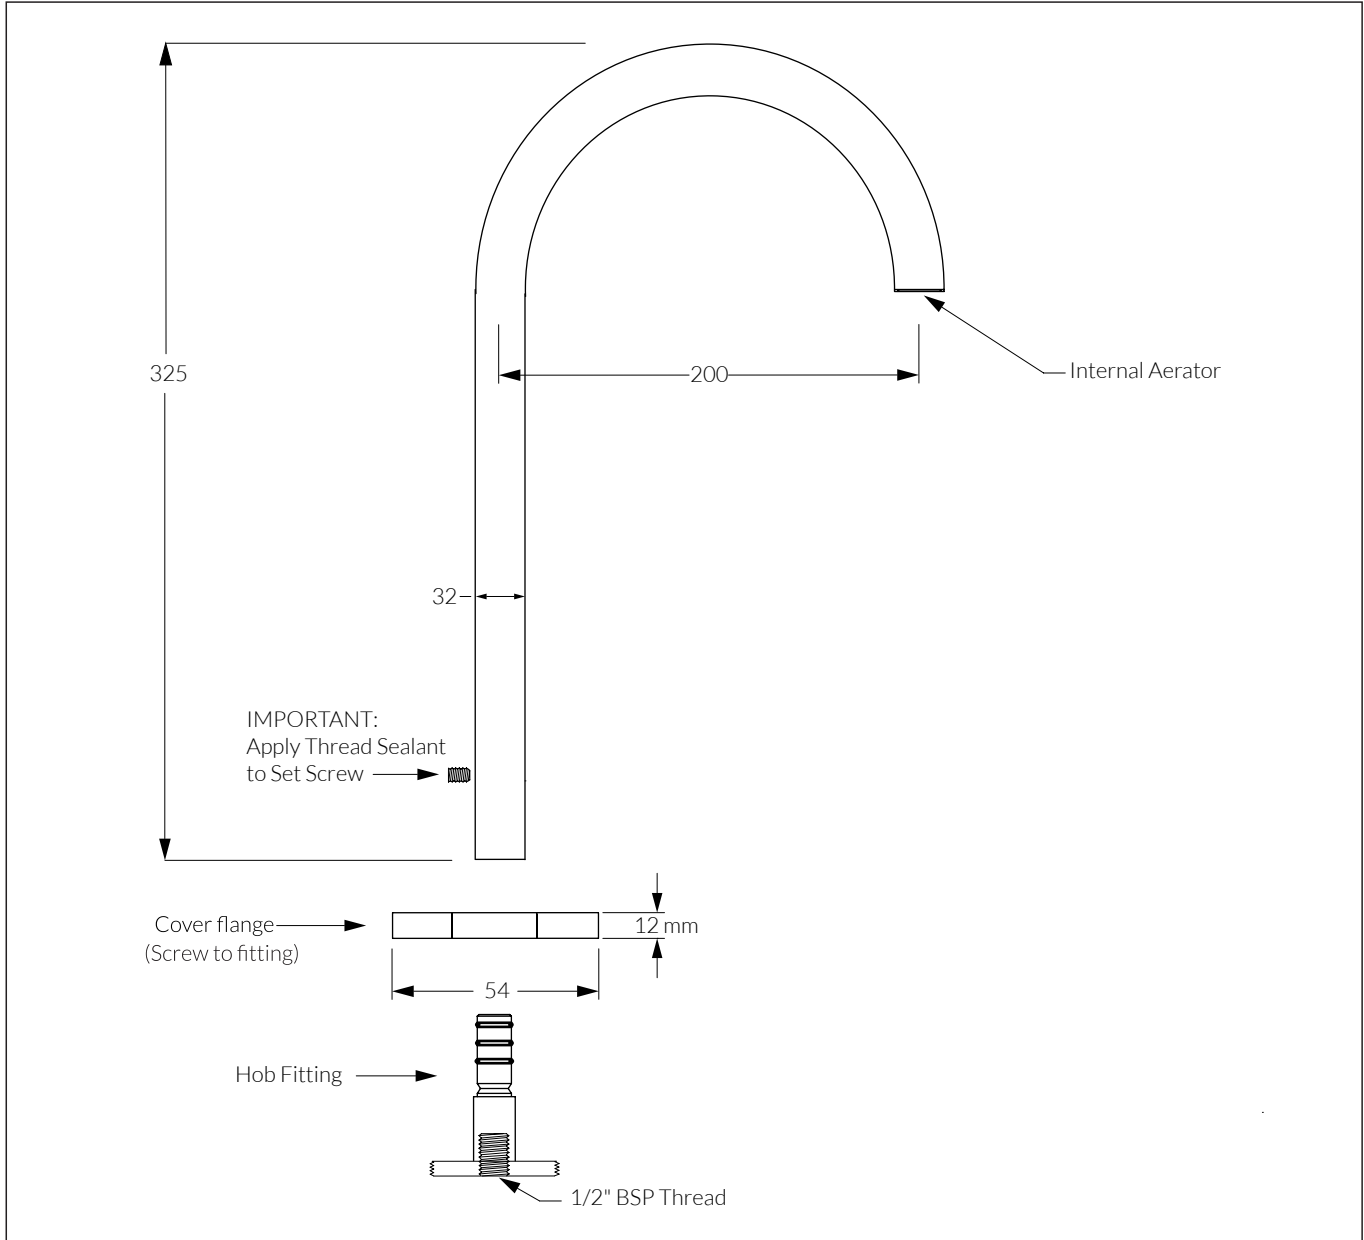

- The provided Hob Fitting is anchored to the hob with a standard 1/2" BSP thread.
  - Once the fitting has been properly secured, the Cover Flange is to be screwed down over fitting ensuring the supplied O-Rings are intact.
  - The Outlet is then pushed on over the fitting until it has passed through the Cover Flange and bottomed out onto the base of the Hob Fitting.
  - The Outlet must be secured to the Hob Fitting by means of a set screw located near the base at the rear of the Outlet.
- Note:** Apply Thread Sealant to set screw before final fit off.
- Once installed, check function of the Outlet and check for water leaks.

PLUMBERS NOTE

- This Outlet is not designed for any other purpose but to direct water to the intended vessel.