


THIRD ANGLE PROJECTION.


## **MOTOR SPECIFICATION**

## 808555QVA-A11S

Q.R. No.		-		CUSTOMER NO.		10.						
	CUSTOMER	Fasco Australia										
	VOLTS	24	40	Hz	50		Ph	1	Duty		<b>A.O.</b>	M.
MOTOR RATING	RPM.	1360					4.9 AMPS					
	NOM. OUTPUT	750 WATTS										
	ROTATION	ANTI CLOCKWISE AT LEAD END										
CAPACITOR		START	RT		μF/	/V RUN		N	20/440			μF/ V
	ENCLOSURE		VENTED									
	MOTOR TYPE		CSR INSULA			TION CL	ION CLASS B130					
THERMA	THERMAL PROTECTION		AUTO RESET OVERLOAD									
	APPLICATION	FAN COIL UNIT - SHAFT HORIZONTAL										
BEARING D.E.		6202 <b>ZZ</b>			<u>'</u>		LUDDICAT		LONG LIFE		FE,	
В	EARING N.D.E.		620	2 <b>Z</b> Z	<u>'</u>			UBRICATION		WIDE RANGE		
	SUPPLY LEAD	SINGLE CORE 1300 ± 30 BRAIDED SLEEVING										
EARTH PROVISION		VIA SUPPLY LEAD										
SP	BASIC BUILD ECIFICATION	3	05-570	)-02		PAINT/ COLOUR		PC GREY				
	RFORMANCE PECIFICATION	S	P8502	7-01				PLAIN E/SHIELDS				
(	CONNECTION DIAGRAM	3	93-402	2-04			RATI LAB	-	SS	ΓDA	JTO.I	FMT

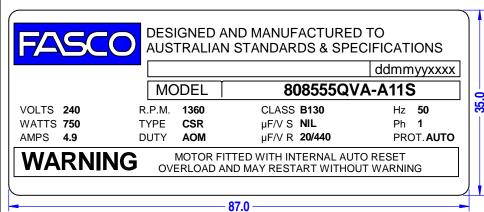

## FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

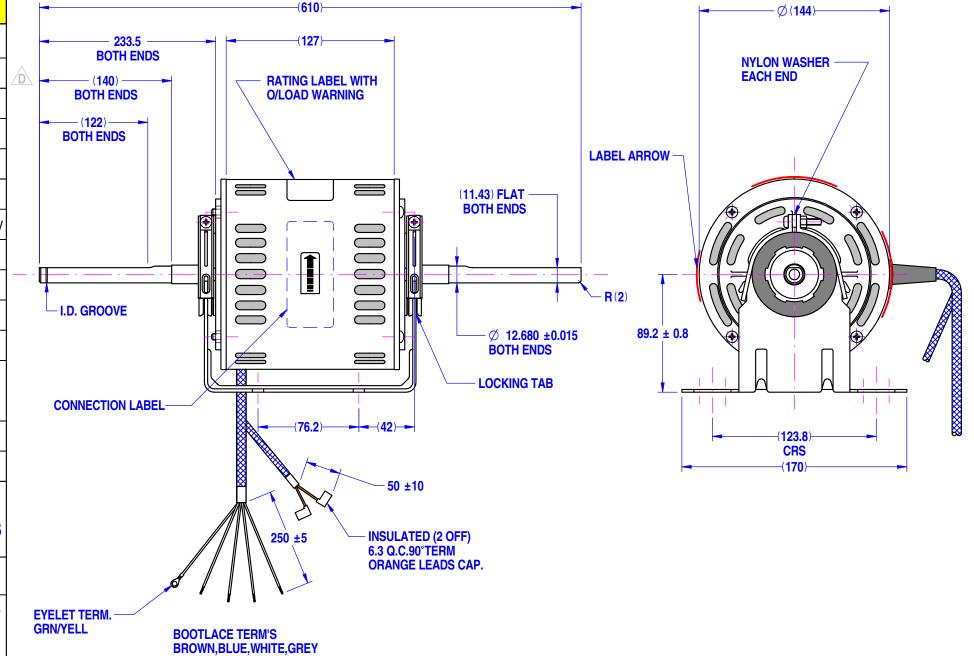

## SPECIAL REQUIREMENTS:

- 1)\_MOTOR TO BE PACKED IN SINGLE CARTON.
- 2)\_CAPACITOR SUPPLIED BY CUSTOMER.

D	IMENSIONS				
TOLERANCES					
DEC	CIMALS	ANGULAR			
.X	± 1.0	± 30'			
.XX	± 0.1				
THIS DR	AWING REMAINS TH	E PROPERTY OF FASCO			
		USED, COPIED OR ISSUED SION FROM FASCO MOTORS			

UNLESS OTHERWISE SPECIFIED: MOTOR WEIGHT

MOTOR WEIG	9.6	kg.
DRAWN	muntana	12/07/2006
CHECKED	Pipat	25/10/2018
RELEASED	Kanapote	26/10/2018
SCALE	N.T	.s.



_	29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,
	BANGKRANG, MUANG NONTHABURI DISTRICT,
	NONTHABURI 11000 THAILAND
	HOHITIADONI 11000 ITIAILAND

FF	RAME	
ST	ATUS	

**A3** 

**MOTOR** D B027:8555V-750-GDD:FASCO

REVISION

F

SHEET DWG. NO.

808555QVA-A11S