

# THERMANN™

THERMANN.COM.AU



## WE'VE COMPLETED OUR FAMILY



### With the arrival of twins

---

Thermann twin element electric water heaters now available in 250L, 315L and 400L models.

# THERMANN™

THERMANN.COM.AU



With the addition of twin element electric water heaters to the range, you can now have the best of both worlds.

That's economical off-peak hot water, combined with a backup supply.

Thermann twin element water heaters feature a secondary 'top' element, to heat an additional capacity of water to reduce the chance of running out. This is often referred to as a 'boost capacity', and can be continually heated as hot water is used.

It's that little bit extra when you need it.

- Cost effective - Primary heating with off-peak with a continuous backup
- Flexible - Ideal for varying hot water loads
- Limited tariffs - Perfect for regions where extended off-peak tariffs are unavailable
- Space efficient - For when there's no room for a larger tank
- Fast hot water - The boost capacity can be heated (and reheated) quickly


## RANGE FEATURES

- Commercial grade enamel and a thicker anode
- Easy installation, with water connections on both sides of tank
- Full flow pressure to all outlets
- Australian made
- 10-year tank warranty, including 1-year full parts and labour\*



SPECIFICATIONS	NEW					NEW		NEW	
	80THMB1	125THMB1	160THMB1	250THMB1	250THMB2	315THMB1	315THMB2	400THMB1	400THMB2
Storage Capacity (L)	88	130	161	259	259	321	321	415	415
Hot Water Delivery Rating (L)	80	125	160	250	250	315	315	400	400
Boost Capacity (L)	-	-	-	-	50	-	50	-	80
Element Sizes (kW)	3.6	1.8, 3.6	2.4, 3.6	3.6	2 x 3.6kW	3.6	2 x 3.6kW 2 x 4.8kW	3.6	2 x 4.8kW
Net Weight Empty (kg)	41	51	59	72	72	93	93	115	115
Relief Valve Pressure (kPa)	1000	1000	1000	1000	1000	1000	1000	1000	1000
Max Inlet Pressure (kPa)	800	800	800	800	800	800	800	800	800

TANK DIMENSIONS (MM)	80L	125L	160L	250L	315L	400L
A Overall Height	925	1090	1315	1445	1765	1705
B Overall Diameter	490	530	530	620	620	705
C Cold Water Inlet	160	190	190	195	195	220
D Hot Water Inlet	735	865	1095	1210	1530	1445
E Electrical Entry	85	100	100	105	105	130

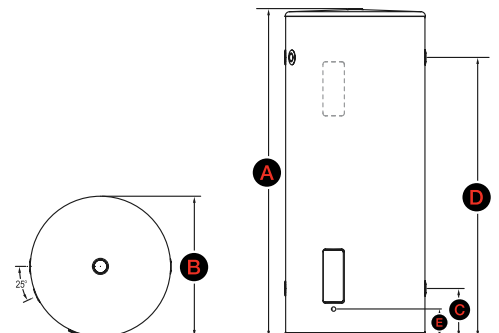

All Thermann electric storage water heaters are dual-handed for ease of installation and operate at 240V AC single phase electricity supply.

\*Warranty terms and conditions are in the product's Owners Manual.

The information supplied was correct at time of printing. Specification and materials may change without notice. 0918