


**MOTOR SPECIFICATION**

**8061S082-17S**

|                           |  |                  |                       |                                     |               |            |      |            |
|---------------------------|--|------------------|-----------------------|-------------------------------------|---------------|------------|------|------------|
| Q.R. No.                  | -  | CUSTOMER NO.     | <b>F40P5134-600SA</b> |                                     |               |            |      |            |
| CUSTOMER                  | <b>FASCO AUSTRALIA</b>                       |                  |                       |                                     |               |            |      |            |
| MOTOR RATING              | VOLTS  | <b>240</b>       | Hz                    | <b>50</b>                           | Ph            | <b>1</b>   | Duty | <b>AOM</b> |
|                           | RPM.   | <b>1200</b>      |                       |                                     |               | <b>4.4</b> | AMPS |            |
|                           | NOM. OUTPUT                                  | <b>600 WATTS</b> |                       |                                     |               |            |      |            |
| ROTATION                  | <b>CLOCKWISE AT DRIVE END</b>                |                  |                       |                                     |               |            |      |            |
| CAPACITOR                 | START  | -----            | μF/V                  | RUN                                 | <b>15/400</b> |            | μF/V |            |
| ENCLOSURE                 | <b>VENTED</b>                                |                  |                       |                                     |               |            |      |            |
| MOTOR TYPE                | <b>CSR</b>                                   |                  | INSULATION CLASS      | <b>B 130</b>                        |               |            |      |            |
| THERMAL PROTECTION        | <b>AUTO RESET OVERLOAD</b>                   |                  |                       |                                     |               |            |      |            |
| APPLICATION               | <b>FAN - SHAFT HORIZONTAL</b>                |                  |                       |                                     |               |            |      |            |
| BEARING D.E.              | <b>6202 ZZ</b>                               |                  | LUBRICATION           | <b>LONG LIFE, WIDE RANGE</b>        |               |            |      |            |
| BEARING N.D.E.            | <b>6202 ZZ</b>                               |                  |                       |                                     |               |            |      |            |
| SUPPLY LEAD               | <b>SINGLE CORE 1300 ±30 BRAIDED SLEEVING</b> |                  |                       |                                     |               |            |      |            |
| EARTH PROVISION           | <b>VIA SUPPLY LEAD</b>                       |                  |                       |                                     |               |            |      |            |
| BASIC BUILD SPECIFICATION | <b>305-570-03</b>                            |                  | PAINT/ COLOUR         | <b>PC GREY CASE PLAIN E/SHIELDS</b> |               |            |      |            |
| PERFORMANCE SPECIFICATION | <b>SP85026-04</b>                            |                  |                       |                                     |               |            |      |            |
| CONNECTION DIAGRAM        | <b>393-425-03</b>                            |                  | RATING LABEL          | <b>SSTDAUTO.FMT</b>                 |               |            |      |            |

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

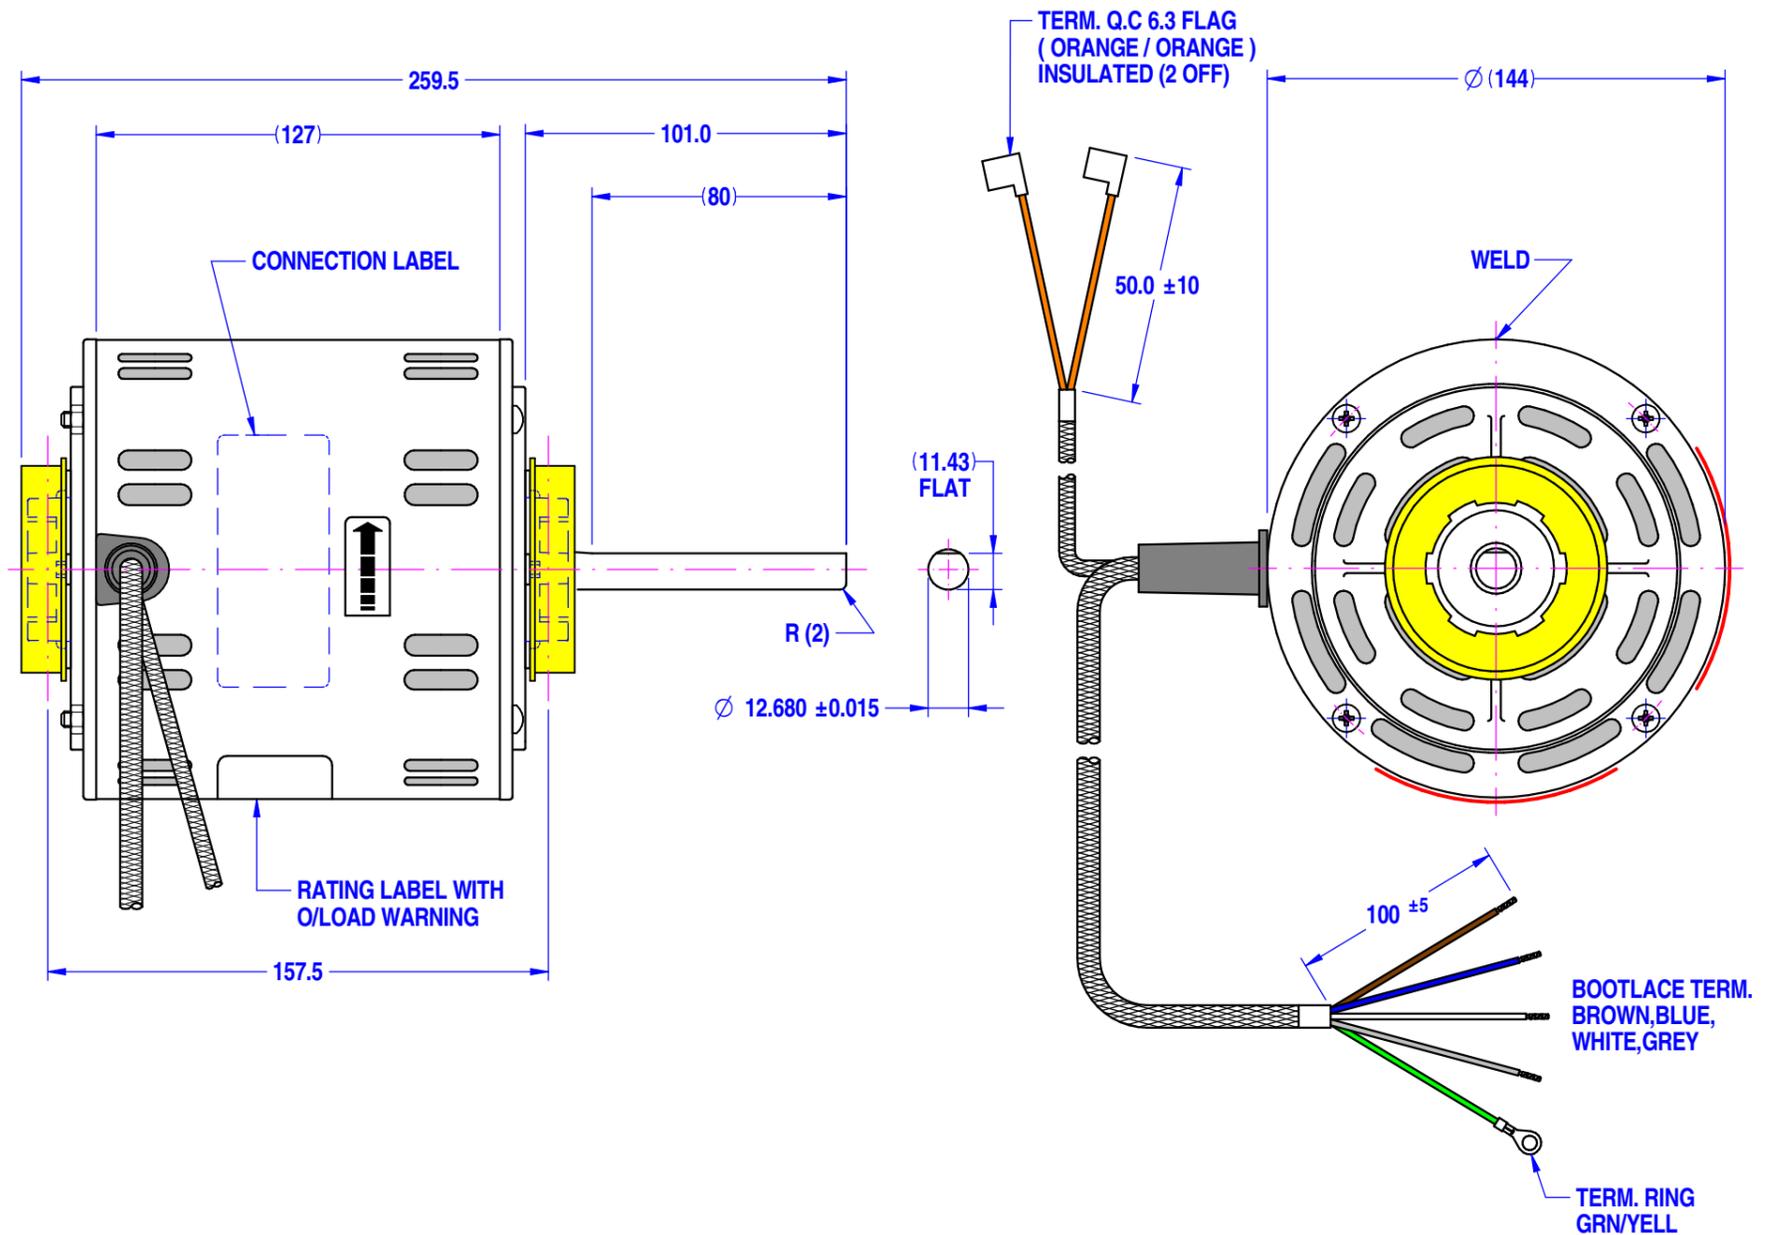

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

F40P5134-600SA ddmmyyxxxx

MODEL 8061S082-17S

|       |     |        |      |        |        |       |      |
|-------|-----|--------|------|--------|--------|-------|------|
| VOLTS | 240 | R.P.M. | 1200 | CLASS  | B130   | Hz    | 50   |
| WATTS | 600 | TYPE   | CSR  | μF/V S | NIL    | Ph    | 1    |
| AMPS  | 4.4 | DUTY   | AOM  | μF/V R | 15/440 | PROT. | AUTO |

**WARNING**

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1)\_CAPACITOR SUPPLIED BY CUSTOMER

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

|           |         |
|-----------|---------|
| DECIMALS  | ANGULAR |
| .X ± 1.0  | ± 30'   |
| .XX ± 0.1 |         |

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

|              |                |            |
|--------------|----------------|------------|
| MOTOR WEIGHT | <b>8.0</b> kg. |            |
| DRAWN        | Pongpun        | 10/05/2010 |
| CHECKED      | Pipat          | 27/10/2018 |
| RELEASED     | Kanapote       | 01/11/2018 |
| SCALE        | N.T.S.         |            |

**FASCO THAILAND**  
29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTABURI DISTRICT, NONTABURI 11000 THAILAND

|        |                          |              |
|--------|--------------------------|--------------|
| FRAME  | MOTOR                    |              |
| STATUS | <b>R</b>                 |              |
| SHEET  | B026:8555V-600-KAD:FASCO |              |
| A3     | DWG. NO.                 | 8061S082-17S |
|        | REVISION                 | <b>D</b>     |