

Dimensions are nominal measurements only.

SPECIFICATIONS	
Recommended use	Domestic, Hotel and Commercial
Colour availability	Chrome
Pressure rating	Maximum continuous operating pressure 1000kPa.
	As per AS/NZS3500 pressure must be limited to 500kPa on any new home, extension or renovation.
	For best performance and longer life we recommend 150-500kPa.
	Hot and cold water inlet pressure should be equal.
Temperature rating	Maximum continuous working temperature 80°C
Suitable Hot Water Units	Storage Tank: Yes
	Continuous Flow: Yes
	Gravity Feed: Not suitable



To see the complete LAUFEN range go to www.reece.com.au/bathrooms

### **CLEANING RECOMMENDATIONS**

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty.








#### **Important Note**


Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.

### **INSTALLATION INSTRUCTIONS**



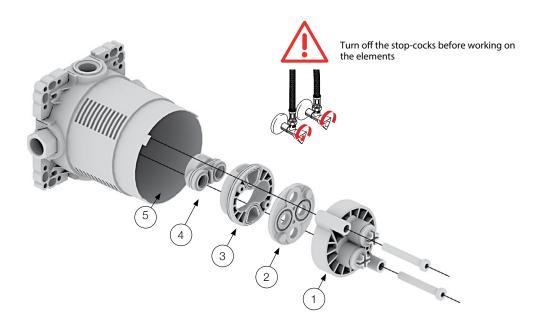


### Input/Output inverters







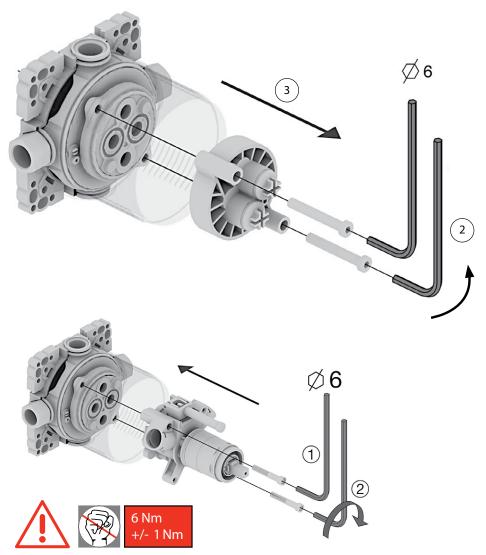

Tighten the 2 screws parallel (1 turn each side) Check before installation that all seals are available and at the right place







Examples of how to fit the decorative elements



Before installing the decor, open the valves and check for water tightness.  $\,$ 





Only for Simibox Light without stop valves

